

DEPT	
1	
2	
3	
4	3
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	




PART NAME:

FEMALE TERMINAL, CS21 APPLICATION

PART NO:

3000H400A/


PART NO.	MATERIAL	FINISH
3000H400A	.020 THICK BRASS	PRETINNED
3000H400AB		NONE
3000H400AC		SILVER PLATE

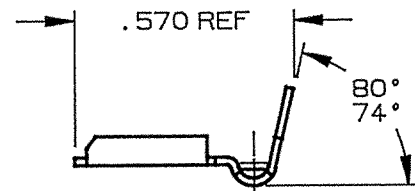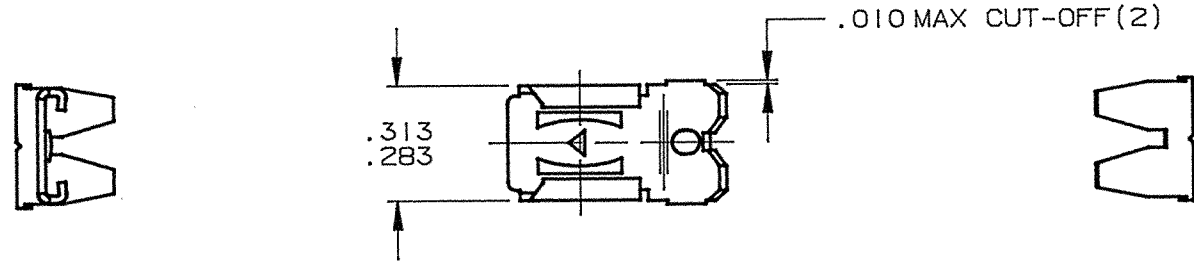

NOTES:

- TO ACCEPT A .250 X .032 MALE TAB.
- TO ACCOMMODATE #14 - #20 GAUGE WIRE.
- RECOMMENDED STRIP LENGTH: 11/32 ± 1/32.
- INSERTION/WITHDRAWAL FORCES TO BE AS FOLLOWS WHEN USING MALE TEST TAB 3000M68H-1.
 - 1ST INSERTION: 12.0 LBS MAX, 6.0 LBS MIN.
 - 1ST WITHDRAWAL: 17.0 LBS MAX, 6.0 LBS MIN. AVERAGE
 - 6TH WITHDRAWAL: 5.0 LBS MIN. AVERAGE, 4.0 LBS MIN. INDIVIDUAL
- FOR STANDARD REELING SEE FIGURE 1.
- FOR REVERSE REELING ADD SUFFIX "R" TO PART NUMBER. (i.e. 3000H400AR) SEE FIGURE 2.



(P)

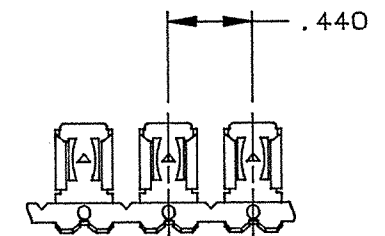

FABRICATED TERMINAL STRIP

SCALE 1=1

ARK-LES
UNCONTROLLED

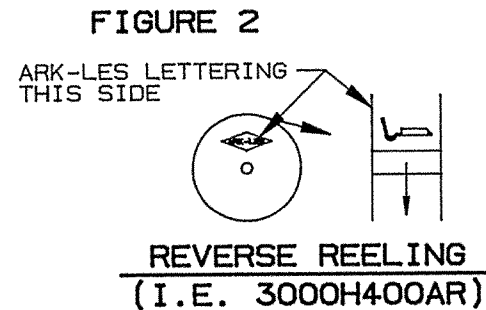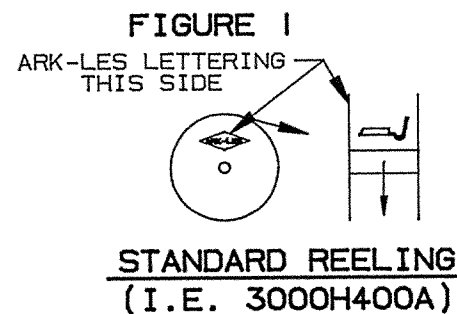

REV.	DESCRIPTION	DATE	DR.	SCALE: 2:1	CAD NO: BT00106	PROD. REL. PER RB 3/15/73 RF	QUOTE REL. PER RB 3/15/73 RF	TOLERANCES UNLESS OTHERWISE SPECIFIED:
R	REVISED PER ECR #11523	6/8/98	RT	APP: COR	6-15-98	DR: R. TASTULA	8/8/95	DECIMALS ±.010 METRIC ±0.25mm ANGLES ±1°
P	REVISED PER ECR #10434	8/8/95	RT	SUPERCEDES DWG. DATED: 7/15/84		CHK'D: R.W.T.	6-10-98	MATERIAL: SEE TABLE
								FINISH: SEE TABLE
								PART NO: 3000H400A/

ORIGINAL IF RED