


DEPT	
1	I
2	
3	
4	I
5	
6	
7	
8	
9	
10	
11	
12	
NC	
JZ	

PART NAME: TERMINAL, FEMALE


PART NO: 3000H4A/(59)

PART NUMBER	MATERIAL	FINISH	Q.C. STAMP
3000H4A(59)	.020 ±.001 BRASS PRETINNED	SEE MAT'L	YES
3000H4AB(59)	.020 ±.001 BRASS	NONE	YES

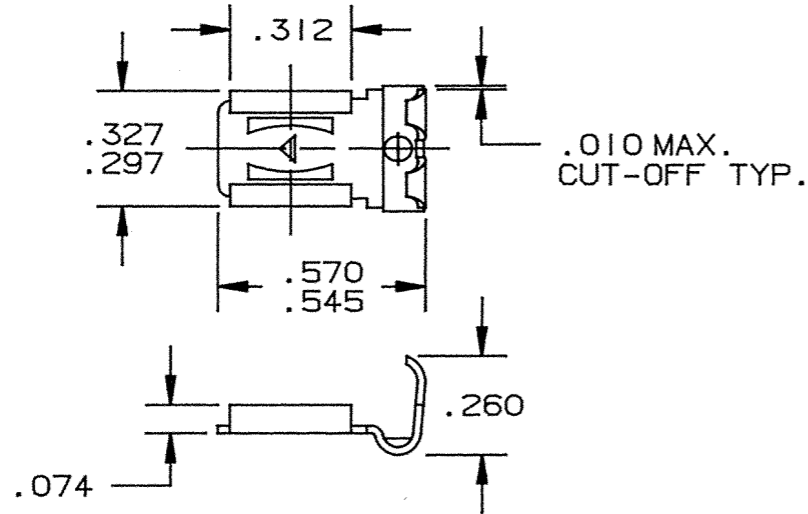


- NOTE:
1. TO ACCEPT .250 X .032 MALE TAB.
 2. WIRE RANGE: #14-#20 AWG.
 3. RECOMMENDED STRIP LENGTH: 11/32 ±1/32.
 4. ADD "R" TO PART NUMBER FOR REVERSE REELING. (I.E. 3000H4AR(59))
 5. WIRE LEADS MAY BE ATTACHED IN A SPECIAL APPLICATOR WHICH FORMS ONE WIRE GRIP EAR TO PROVIDE AN INSULATION GRIP. THIS CAN ONLY BE USED ON WIRES WITH SMALL INSULATION DIAMETERS IN THE RANGE OF .040 - .120 O.D. (#18-#20 GAUGE WIRE ONLY)
RECOMMENDED STRIP LENGTH: 3/16 ±1/32.
 6. FIRST INSERTION FORCE TO BE 5-9 LBS. ALL OTHER REQUIREMENTS ARE PER CURRENT NEMA DC2-19XX & UL310 SPECIFICATIONS.

ARK-LES LETTERING THIS SIDE

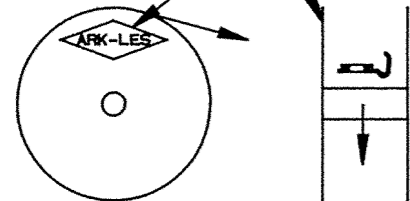

STANDARD REELING
(I.E. 3000H4A(59))


ARK-LES LETTERING THIS SIDE

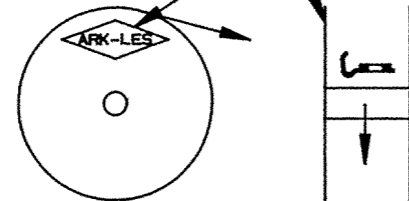

REVERSE REELING
(I.E. 3000H4AR(59))

REELING DIAGRAMS

ARK-LES
UNCONTROLLED

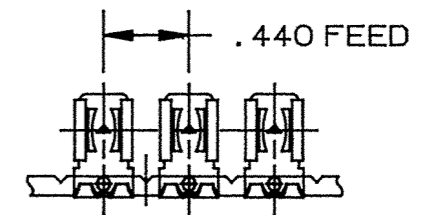

FABRICATED TERMINAL STRIP

SCALE: FULL

ORIGINAL IF RED

			PROD. REL. JM3186 7-13-93 R.T.	TOLERANCES UNLESS OTHERWISE SPECIFIED:		
			QUOTE REL.	DECIMALS ±.010	METRIC ±0.25mm	ANGLES ±1°
			DR: M. BUMILA 6-22-93	MATERIAL: SEE TABLE		
			CHK'D: R.W.T. 6-23-93	FINISH: SEE TABLE		
			APP: Bishop 7-13-93	PART NO: 3000H4A/(59)		
A	PROD. REL. PER ECR #9685	6-22-93	M.B.	SUPERCEDES DWG. DATED:		
REV.	DESCRIPTION	DATE	DR.	SCALE: 2X	CAD NO: BT00072	

(A)

(A)