





CUSTOMER DRAWING

P/N: 3000H 112A/-7



REV
J

PART NO.	MATERIAL	FINISH
3000H 112A-7	.016 ±.0007 BRASS PRETINNED	SEE MAT'L
3000H 112AB-7	.016 ±.0007 BRASS	NONE
3000H 112AD-7	.016 ±.0007 BRASS	POST TIN PLATE

**ARK-LES
UNCONTROLLED**

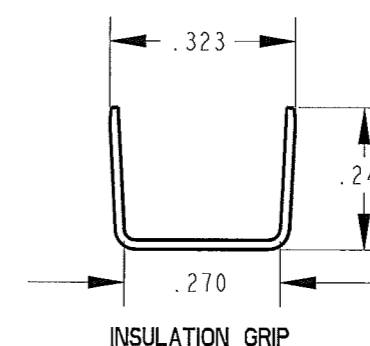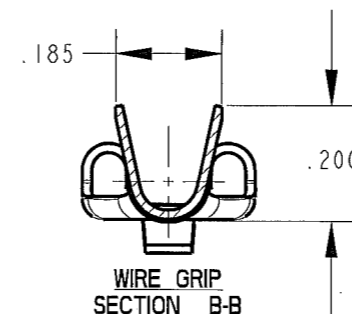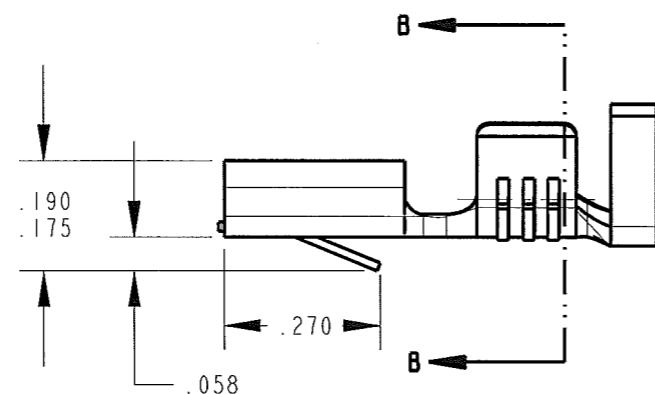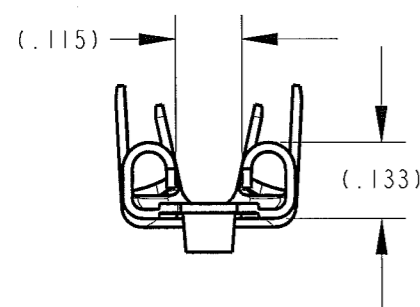

- NOTES:
1. TO MATE WITH .250 X .032 MALE TAB.
 2. TO ACCOMMODATE AWG #16-#12 WIRE OR (2) AWG #14 WIRE OR (2) AWG #18 WIRE.
 3. INSULATION RANGE: .100-.175 DIA.
 4. RECOMMENDED WIRE STRIP LENGTH: $9/32 \pm 1/32$.
 5. INITIAL INSERTION 8 LBS. MAX., 4 LBS. MIN. USING STANDARD .250 X .032 BRASS TAB.

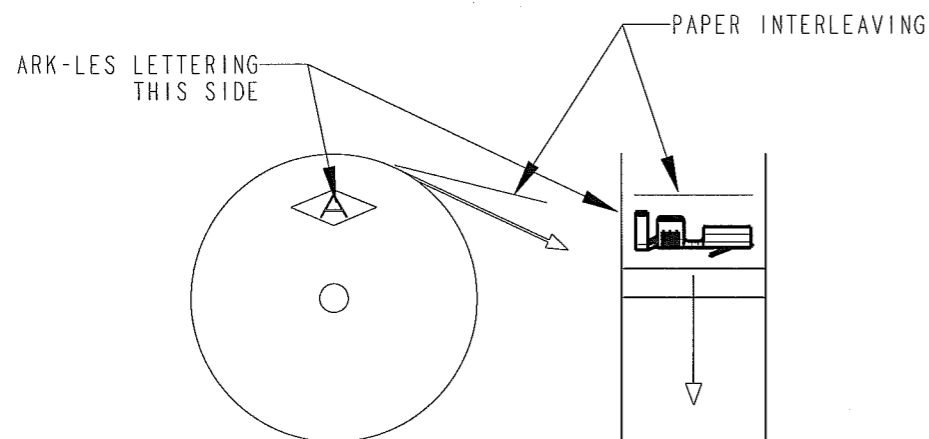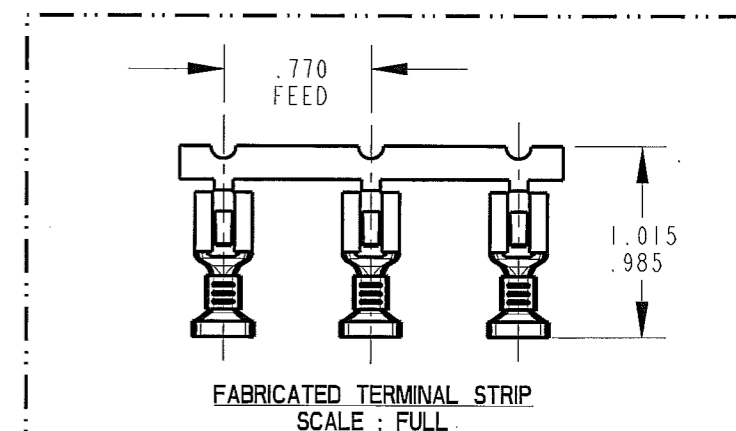

STANDARD REELING DIAGRAM

PRINT DIST.	PROD. REL.	RM 2093	6/18/90	CHK'D	TOLERANCES UNLESS OTHERWISE SPECIFIED	 CORPORATION STOUGHTON, MA ORIGINAL IF RED
DEPT #	QUOTE REL.			APP.	DECIMALS ±.010	
ENG	DRAWN BY	D.O'NEILL	3/16/05	APP.	METRIC ±0.25mm	PART NAME
SALES	SUPERSEDES DWG. DATED:		9/13/01		ANGLES ±1°	CUSTOMER DRAWING
J	REV. PER ECR#	S000192	6/01/06	DON	3RD ANGLE PROJECTION	TERMINAL, FEMALE LOCKING TYPE
H	REV/REDWN ECR#	S000182	3/16/06	DON	DWG SIZE B	CAD#: 3000H_112A-7-REVJ_CUST
REV.	DESCRIPTION	DATE	DR.	CHINA	FINISH: SEE TABLE	P/N: 3000H 112A/-7
						REV J