

CS-023E 3.2x2.5mm Crystal Resonator

CONNOR WINFIELD



2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com

US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Description:

The Connor-Winfield CS-023E is a 3.2x2.5 mm Surface Mount Crystal, designed for applications requiring small packaged tight tolerance crystals. The surface mount package is designed for high-density mounting and is optimum for mass production.

Features:

Model: CS-023E
Frequency: 114.285 MHz
Frequency Calibration: : +/-20 ppm
Frequency Stability: +/-20 ppm
Temperature Range: -40 to 85°C
Surface Mount Package
Tape and Reel Packaging
RoHS Compliant / Lead Free

Electrical Specifications

Parameter	Minimum	Nominal	Maximum	Units	Notes
Output Frequency (Fo)	-	114.285	-	MHz	
Frequency Calibration (@25°C)	-20	-	20	ppm	
Frequency Stability vs. Change in Temperature	-20	-	20	ppm	
Operating Temperature Range:	-40	-	85	°C	
Operation Mode	3rd Overtone				
Cut	AT Cut				
Aging	-3	-	3	ppm/Year	
Shunt Capacitance: (Co)	-	1.0	-	pF	
Load Capacitance: (CL)	-	18	-	pF	
Equivalent Series Resistance @ 25 °C	-	-	50	Ohms	
Drive Level	-	50	-	uW	
Insulation Resistance	-	500	-	Mohm	@ 100 Vdc
Storage Temperature:	-55	-	125	°C	


Package Characteristics

Package	Hermetically sealed ceramic 3.2x2.5mm SMD Package.
Leakage	0.01ppm atm, cc/sec. maxamum

Ordering Information


CS-023E-114.285M

Package Outline

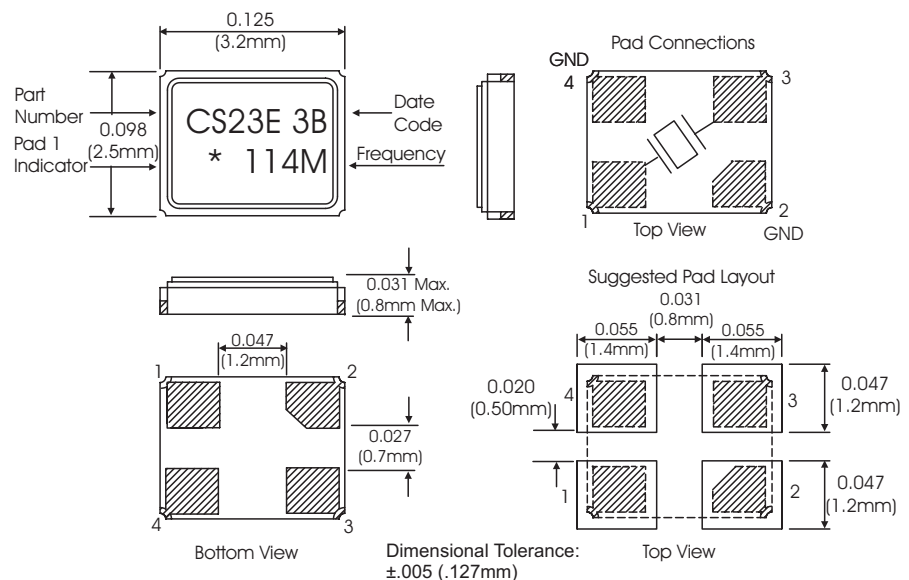

Bulletin **Xt361**
Page **1 of 3**
Revision **00**
Date **11 Feb 2013**

Tape and Reel Information

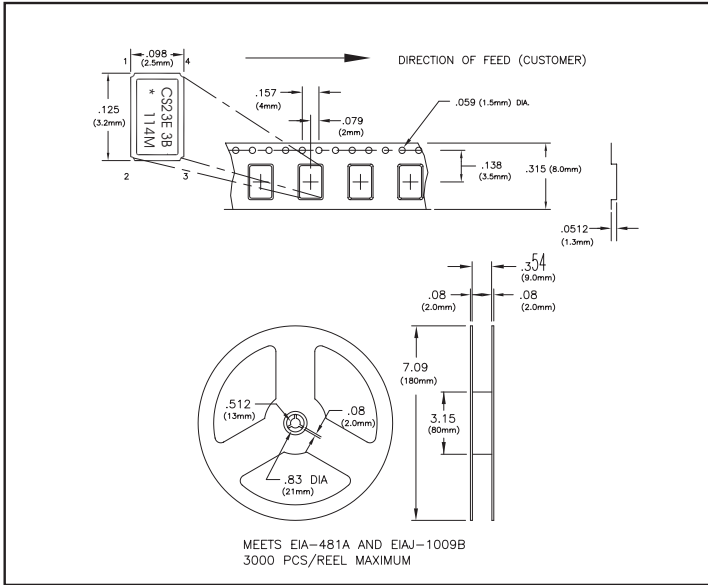

Date Code Information


Date Code

Year Code	Month Code
0 = 2010	A = January
1 = 2011	B = February
2 = 2012	C = March
3 = 2013	D = April
4 = 2014	E = May
5 = 2015	F = June
	G = July
	H = August
	J = September
	K = October
	M = November
	N = December


Date Code Example:

1B
1 = 2011, D = February

Marking Information

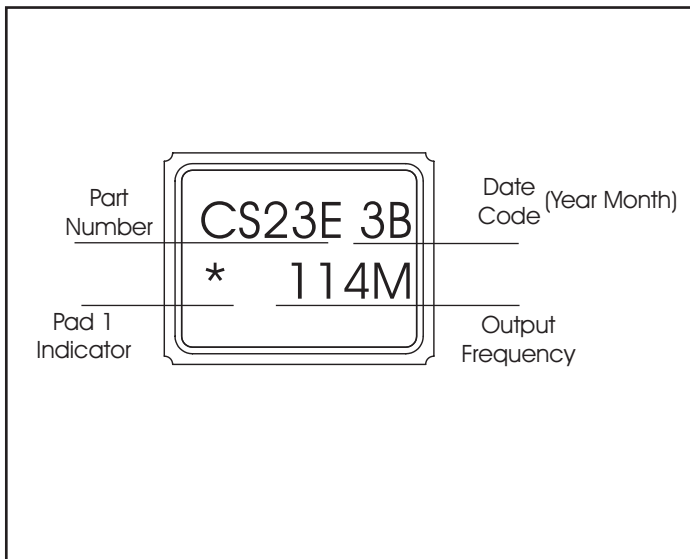

Solder Profile

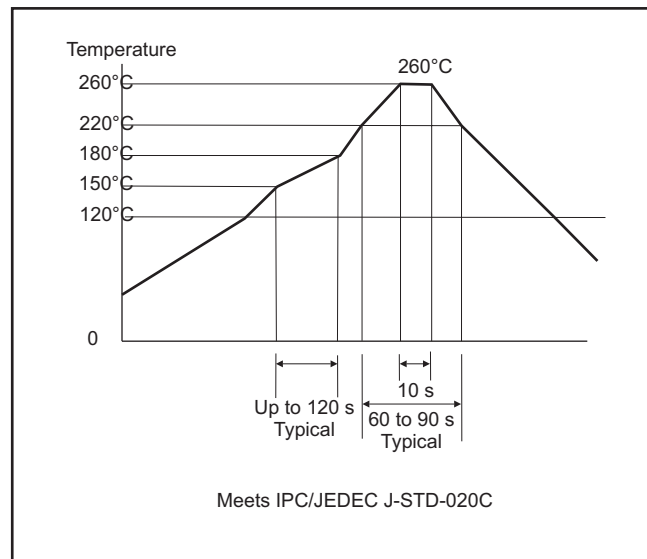

DLD Testing Information

100% of the crystals are measured at the following drive levels in the order listed:

10nw
25nw
50nw
100nw
500nw
1uw
5uw
10uw
50uw
100uw

The reference value is the ESR and FL at 50uw

The Frequency and resistance measurements are then compared to the reference value and P/F limits are as follows:
10/25/50 nw levels 2.0 ppm max, 10% ESR max Remaining drive levels 1.0 ppm max, 10% ESR max.
All devices are tested once and no retesting is allowed.

CS-023E is tested -40 to 85 °C every 2°C with no discontinuities > 1 ppm and the change in R - effective < 10%
