


**Specifications:**

|                         |                                   |
|-------------------------|-----------------------------------|
| Sound level Category    | Loud Sound Level                  |
| Mode of Operation       | Continuous tone                   |
| Mounting                | Panel (see note)                  |
| Voltage Rating          | 6 - 16 Vdc                        |
| Frequency               | 2900 Hz $\pm$ 500 Hz              |
| Loudness (Min. Voltage) | 80 dB(A) min. @ 2 FT and 6 Vdc    |
| Loudness (Max Voltage)  | 95 dB(A) min. @ 2 FT and 16 Vdc   |
| Current Draw            | 6 mA Max @ 6 Vdc                  |
| Current Draw            | 22 mA Max @ 16 Vdc                |
| Storage Temperature     | -40°C to +85°C                    |
| Operating Temperature   | -30°C to +65°C                    |
| Weight (Typical)        | 1.5 oz (42 g)                     |
| Housing                 | 6/6 Nylon, and Color Black        |
| Options                 | For other options contact factory |

**Dimensions:** Inches (mm)

**UL Recognized** 

**RoHS Compliant**

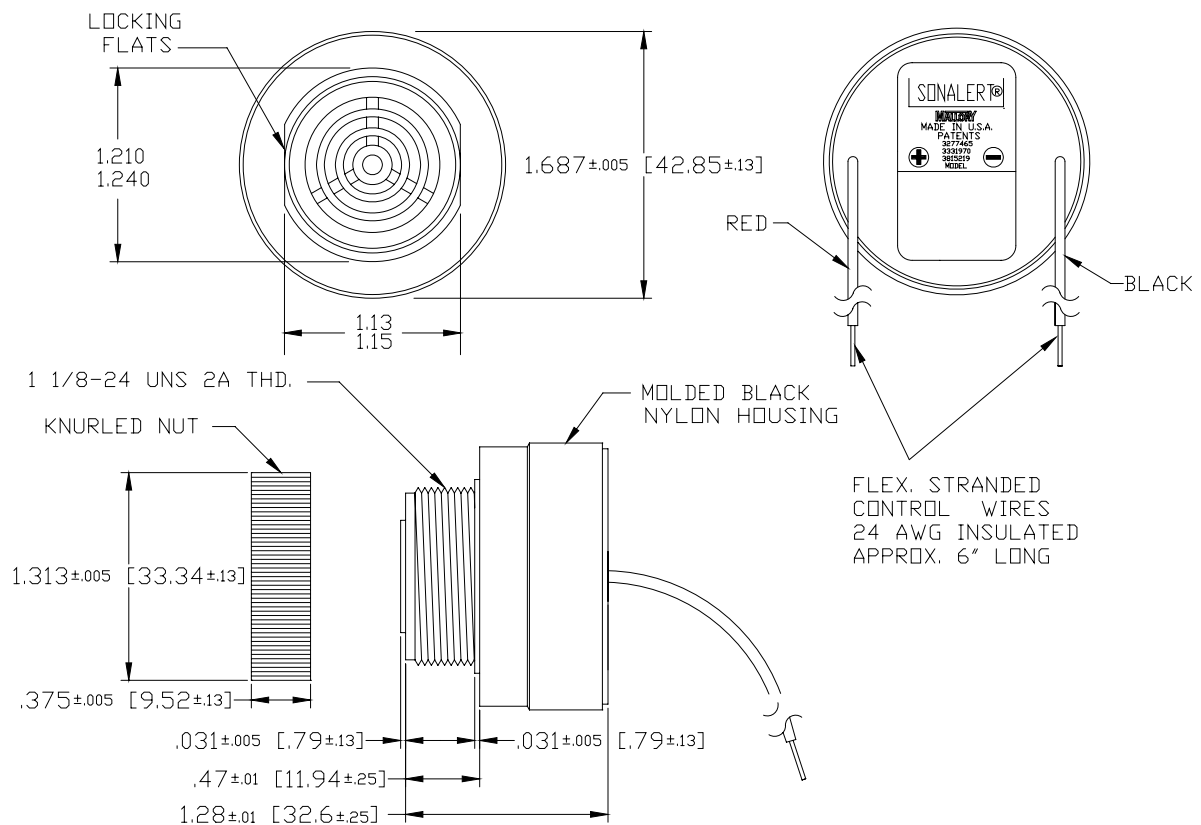

NOTE: MOUNTING- REMOVE BLACK PLASTIC NUT AND INSERT THREADED FRONT THROUGH 1.25" HOLE PUNCHED IN PANEL, IF ORIENTATION

ON. DO NOT OVERTIGHTEN.