



**Mallory Sonalert Products, Inc.**

Part #:

**MSE28LCM3**

**Sales Outline Drawing**

Revision:


**A**

**Specifications:**

|                       |                               |
|-----------------------|-------------------------------|
| Sound Level Category  | Loud                          |
| Mode of Operation     | Chime @ Once per 1 Second     |
| Voltage Rating        | 16 to 28 VDC                  |
| Frequency             | 3500 ± 500 Hz                 |
| Loudness @ 1 FT       | 85 to 95 dB(A) Typ.           |
| Current Draw          | 50mA MAX                      |
| Housing Material      | Valox (UL94V-0), Color: Black |
| Storage Temperature   | -40° to +80°C                 |
| Operating Temperature | -40° to +65°C                 |
| Weight (Typical)      | 4.0g                          |
| Options               | Please contact factory.       |

**Dimensions:** Inches (mm)

**ROHS Compliant**

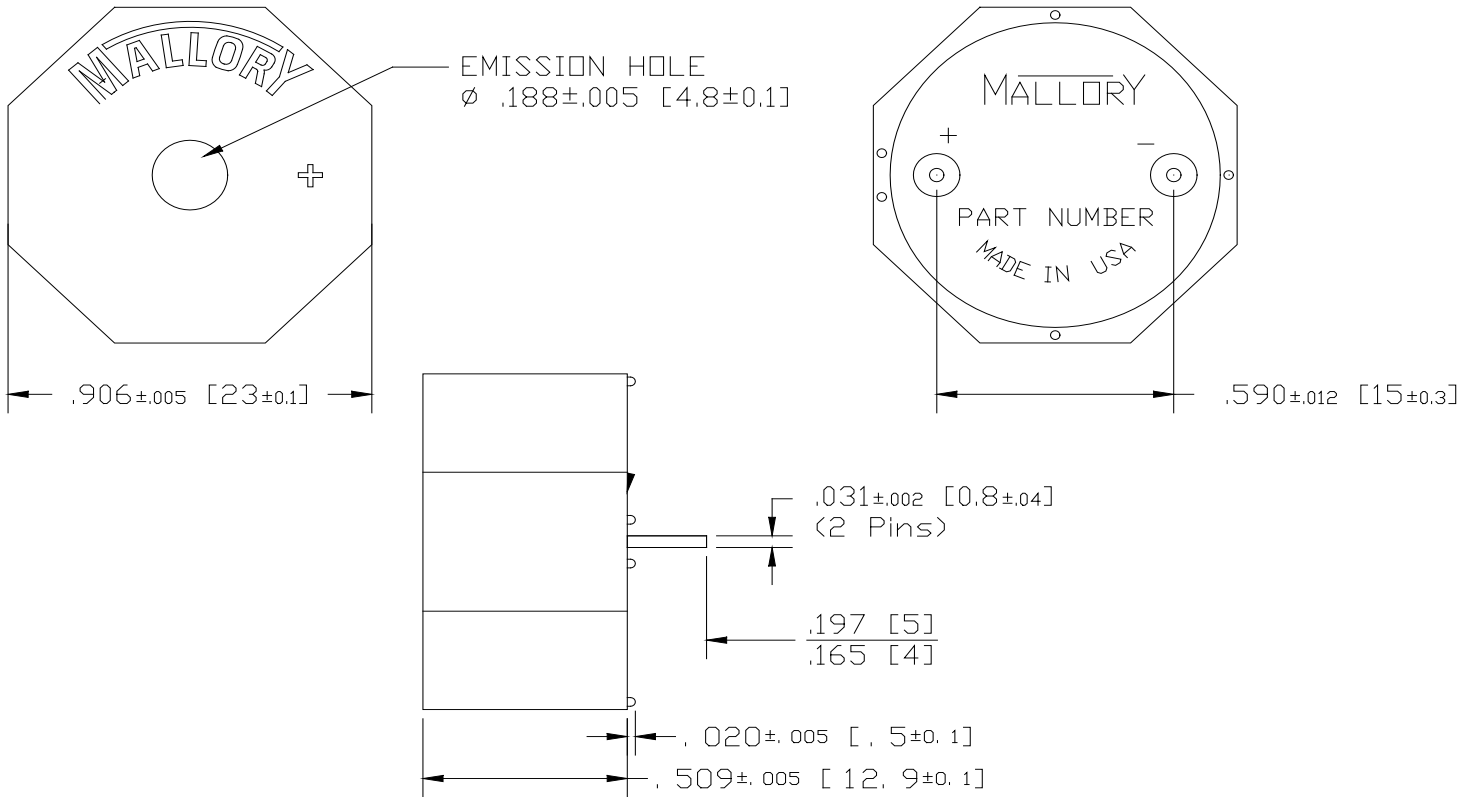

NOTE A:  
TERMINALS - .031" DIA. NICKEL/TIN COATED BRASS.

NOTE B:  
MOUNTING- INSERT INTO PRINTED CIRCUIT BOARD AND HAND OR MACHINE SOLDER.  
UNITS ARE SUITABLE FOR WAVE SOLDERING. RECOMMENDED MAXIMUM TEMPERATURE  
AND TIME DURATION FOR WAVE SOLDERING IS +270°C AND 3 SECONDS RESPECTIVELY.