



ALPHA & OMEGA
SEMICONDUCTOR, LTD

AO6808

Dual N-Channel Enhancement Mode Field Effect Transistor



General Description

The AO6808/L uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a load switch. It is ESD protected.

AO6808 and AO6808L are electrically identical.

-RoHS Compliant

-AO6808L is Halogen Free

Features

$V_{DS} = 20V$



$I_D = 6A$ ($V_{GS} = 4.5V$)

$R_{DS(ON)} = 19m\Omega$ (typical) ($V_{GS} = 4.5V$)

$R_{DS(ON)} = 20m\Omega$ (typical) ($V_{GS} = 4.0V$)

$R_{DS(ON)} = 21m\Omega$ (typical) ($V_{GS} = 3.1V$)

$R_{DS(ON)} = 23m\Omega$ (typical) ($V_{GS} = 2.5V$)

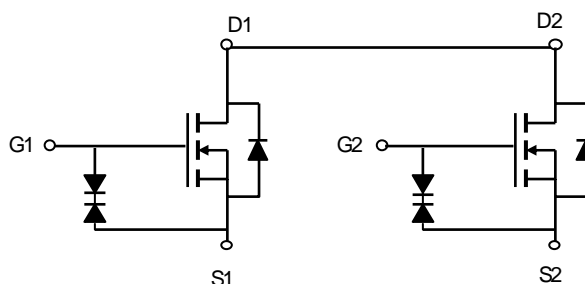

Absolute Maximum Ratings $T_A=25^\circ C$ unless otherwise noted

Parameter	Symbol	10 Sec	Steady State	Units
Drain-Source Voltage	V_{DS}	20		V
Gate-Source Voltage	V_{GS}	± 12		V
Continuous Drain Current ^A	I_D	6	4.6	A
$T_A=25^\circ C$				
$T_A=70^\circ C$		4.6	3.7	
Pulsed Drain Current ^B	I_{DM}	60		
Power Dissipation ^A	P_D	1.3	0.8	W
$T_A=25^\circ C$				
$T_A=70^\circ C$		0.8	0.5	
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150		$^\circ C$

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Ambient ^A	$R_{\theta JA}$	76	95	$^\circ C/W$
$t \leq 10s$				
Maximum Junction-to-Ambient ^A		118	150	$^\circ C/W$
Steady State				
Maximum Junction-to-Lead ^C	$R_{\theta JL}$	54	68	$^\circ C/W$
Steady State				

Electrical Characteristics ($T_J=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
STATIC PARAMETERS						
BV _{DSS}	Drain-Source Breakdown Voltage	I _D = 250μA, V _{GS} = 0V	20			V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = 20V, V _{GS} = 0V T _J = 55°C			1 5	μA
I _{GSS}	Gate-Body leakage current	V _{DS} = 0V, V _{GS} = ±10V			±10	μA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} I _D = 250μA	0.5	0.75	1	V
I _{D(ON)}	On state drain current	V _{GS} = 4.5V, V _{DS} = 5V	60			A
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} = 4.5V, I _D = 6.0A T _J =125°C	15 21	19 27	23 33	mΩ
		V _{GS} = 4.0V, I _D = 5.5A	15	20	25	mΩ
		V _{GS} = 3.1V, I _D = 5A	16	21	27	mΩ
		V _{GS} = 2.5V, I _D = 2A	17	23	30	mΩ
g _{FS}	Forward Transconductance	V _{DS} = 5V, I _D = 6.0A		34		S
V _{SD}	Diode Forward Voltage	I _S = 1A,V _{GS} = 0V		0.65	1	V
I _S	Maximum Body-Diode Continuous Current				1.3	A
DYNAMIC PARAMETERS						
C _{iSS}	Input Capacitance	V _{GS} =0V, V _{DS} =10V, f=1MHz		620	780	pF
C _{oss}	Output Capacitance			125		pF
C _{rSS}	Reverse Transfer Capacitance			64		pF
SWITCHING PARAMETERS						
Q _g (10V)	Total Gate Charge	V _{GS} = 10V, V _{DS} = 10V, I _D = 6A		16.2	21	nC
Q _g (4.5V)	Total Gate Charge			7.7	10	nC
Q _{gs}	Gate Source Charge			1.5		nC
Q _{gd}	Gate Drain Charge			2.7		nC
t _{D(on)}	Turn-On DelayTime	V _{GS} =10V, V _{DS} =10V, R _L =1.7Ω, R _{GEN} =3Ω		236		ns
t _r	Turn-On Rise Time			448		ns
t _{D(off)}	Turn-Off DelayTime			9.5		μs
t _f	Turn-Off Fall Time			4.1		μs
t _{rr}	Body Diode Reverse Recovery Time	I _F =6A, dI/dt=100A/μs		25	33	ns
Q _{rr}	Body Diode Reverse Recovery Charge	I _F =6A, dI/dt=100A/μs		9		nC

A: The value of $R_{\theta JA}$ is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25^\circ\text{C}$. In any given application depends on the user's specific board design. The current rating is based on the $t \leq 10\text{s}$ thermal resistance rating.

B: Repetitive rating, pulse width limited by junction temperature.

C: The $R_{\theta JA}$ is the sum of the thermal impedance from junction to lead $R_{\theta JL}$ and lead to ambient.







D: The static characteristics in Figures 1 to 6 are obtained using $< 300\mu\text{s}$ pulses, duty cycle 0.5% max.

E: These tests are performed with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_A=25^\circ\text{C}$. The SOA curve provides a single pulse rating.

Rev0 April 2008

THIS PRODUCT HAS BEEN DESIGNED AND QUALIFIED FOR THE CONSUMER MARKET. APPLICATIONS OR USES AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS ARE NOT AUTHORIZED. AOS DOES NOT ASSUME ANY LIABILITY ARISING OUT OF SUCH APPLICATIONS OR USES OF ITS PRODUCTS. AOS RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN, FUNCTIONS AND RELIABILITY WITHOUT NOTICE.

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

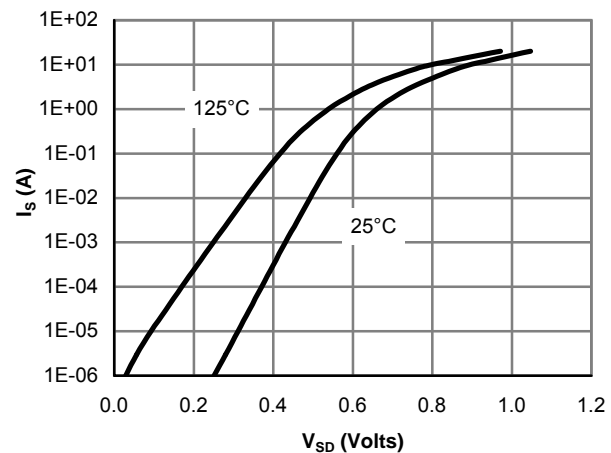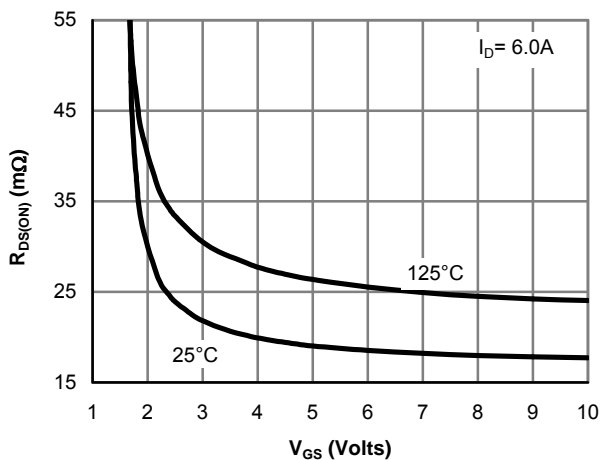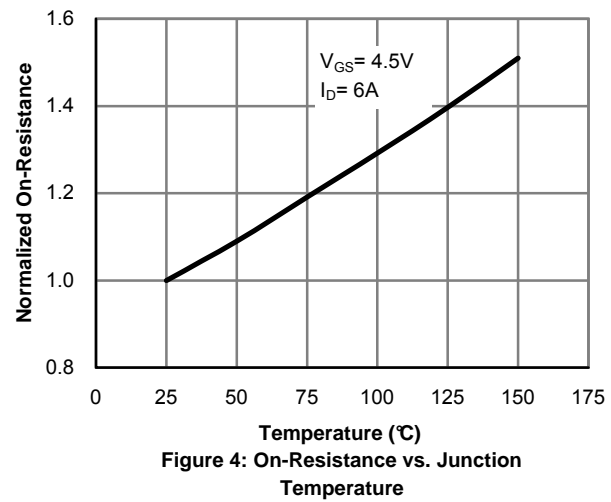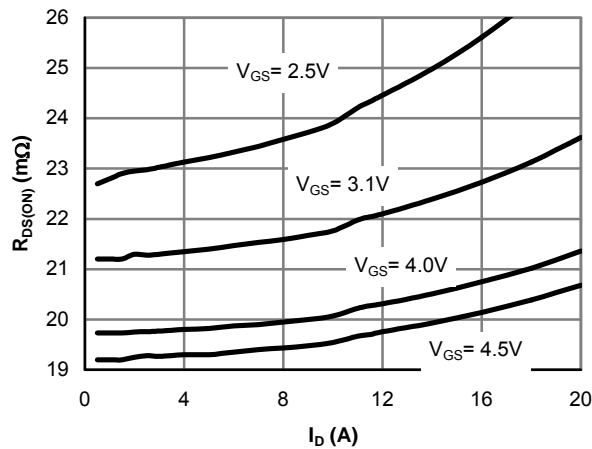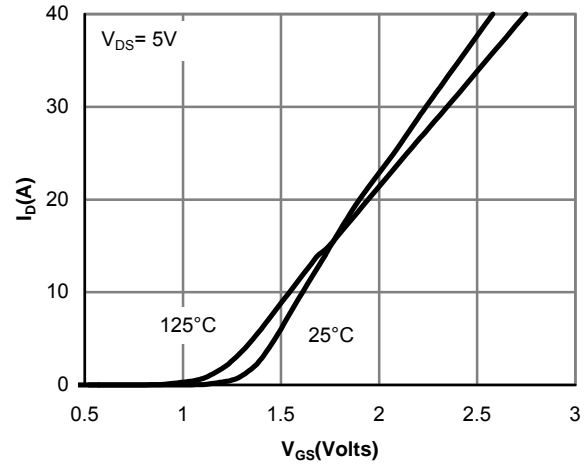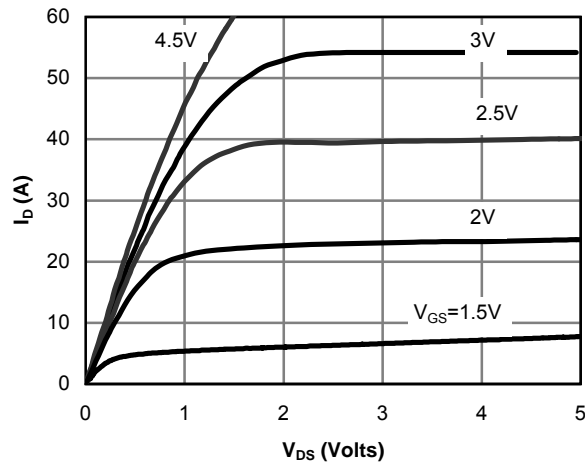

TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS

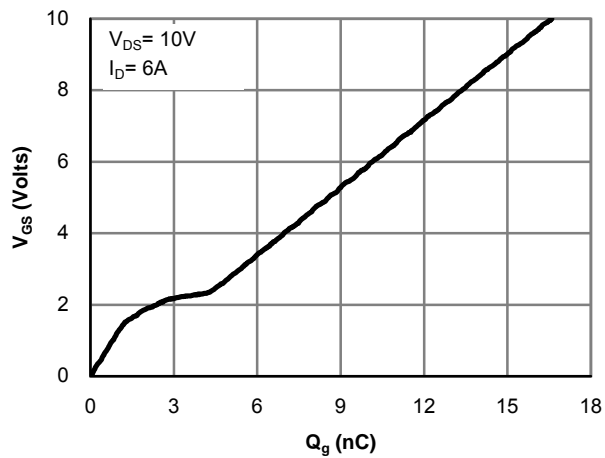


Figure 7: Gate-Charge Characteristics

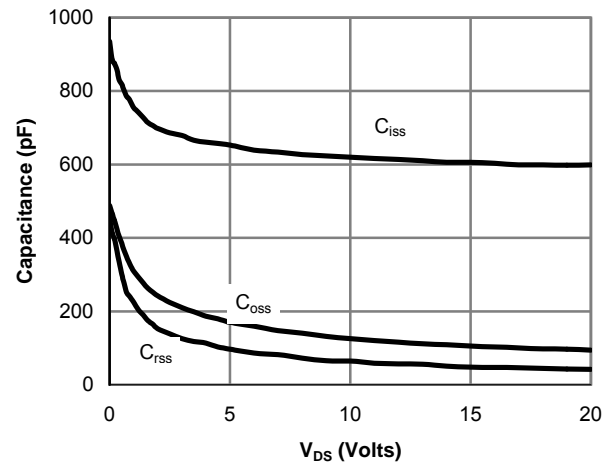


Figure 8: Capacitance Characteristics

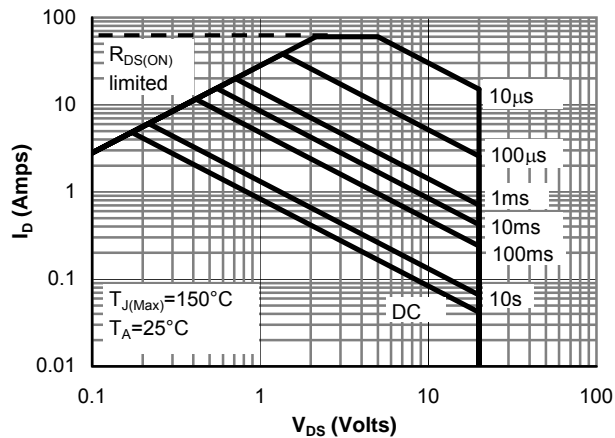


Figure 9: Maximum Forward Biased Safe Operating Area (Note E)

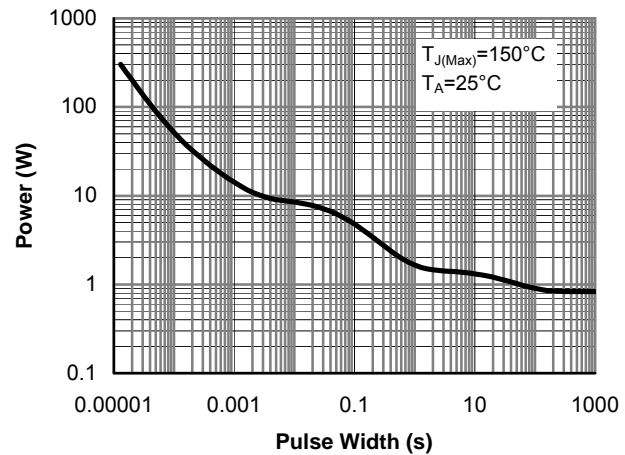


Figure 10: Single Pulse Power Rating Junction-to-Ambient (Note E)

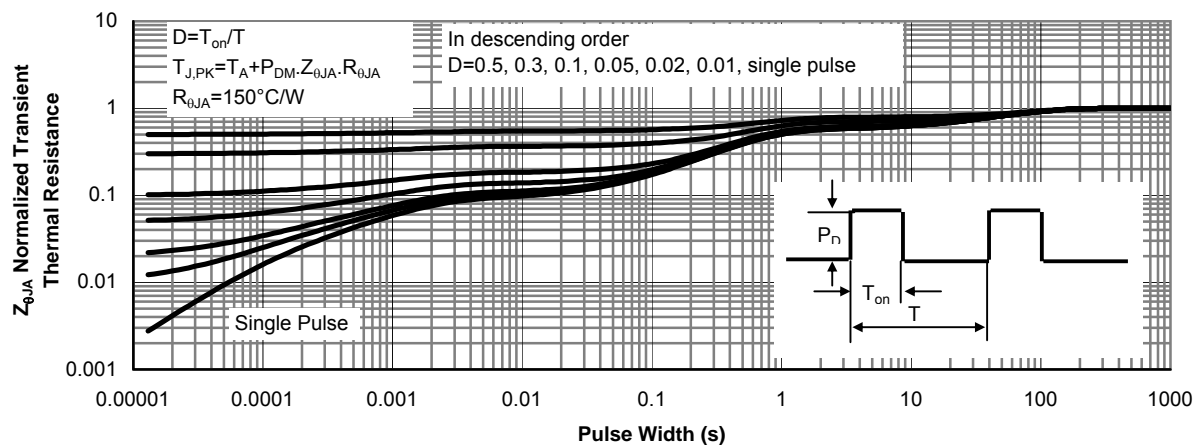


Figure 11: Normalized Maximum Transient Thermal Impedance (Note E)