



CAUTION:
REVERSE POLARITY TO INVERTER
INPUT WILL CAUSE AN OPEN CIRCUIT
IN FUSE F1.

REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	3/10/03
A	DIM. CHANGE	3/27/03
B	RoHS COMPLIANCE	5/9/06

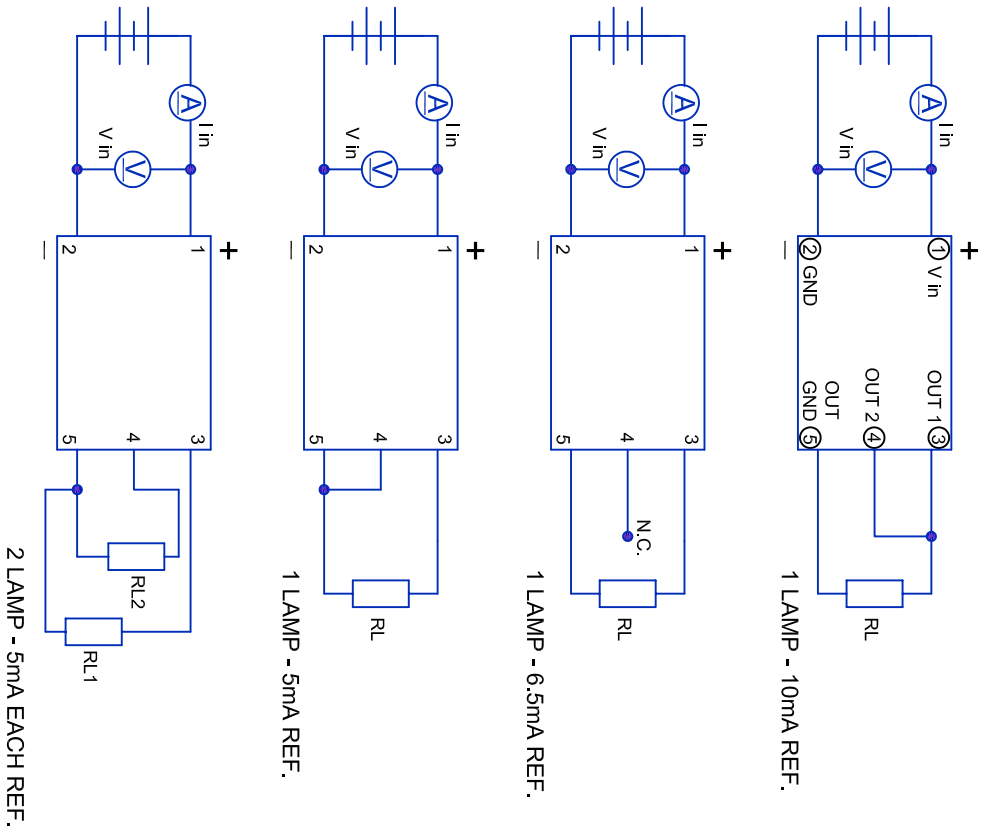

BOARD PIN #	INPUT
1	+V (V _{in})
2	V (GND)
3	OUT 1
4	OUT 2
5	OUT (GND)

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	220	260	500
OUTPUT VOLTAGE: (Vrms)	950	1000	1050
OUTPUT CURRENT (mA) x 2	4.5	5.5	6.5
OUTPUT FREQUENCY: (kHz)	25	35	45
OPERATING TEMP: (CELSIUS)	0	25	50

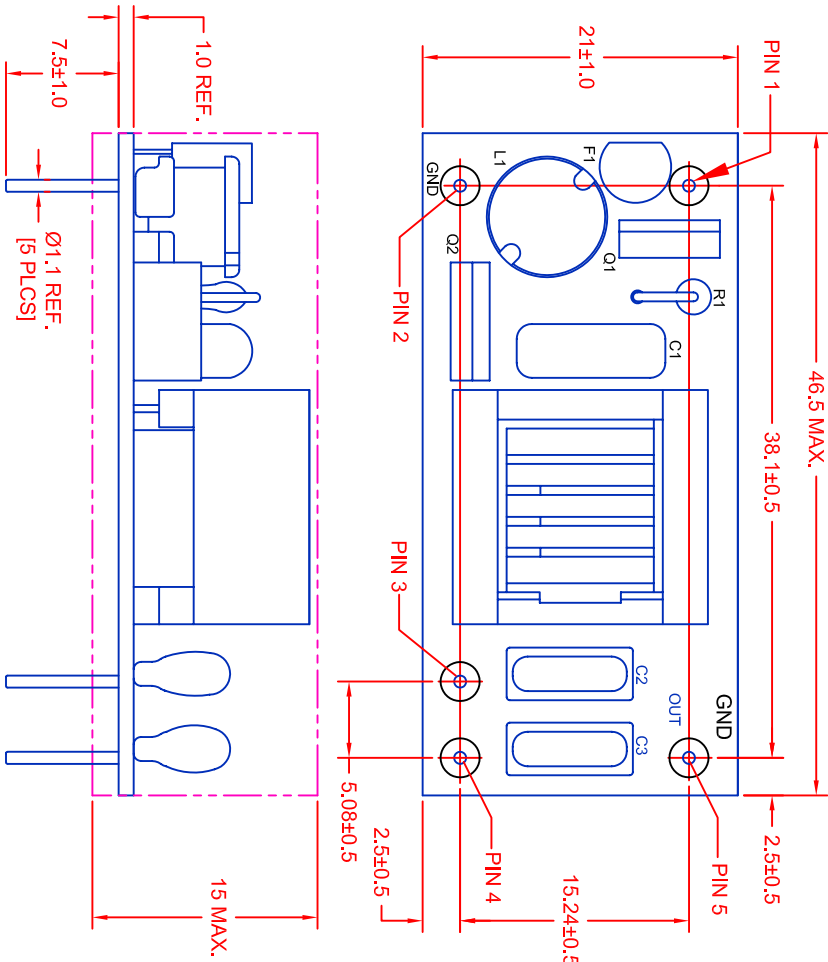

* JKL PART NO.: BXA-12529
* RoHS COMPLIANCE

METRIC	DIMENSIONS ARE IN MILLIMETERS		TITLE	
	TOLERANCE UNLESS OTHERWISE SPECIFIED	1 PL +/- 0.3 2 PL +/- 0.3	ANGLE +/- 0	THIRD ANGLE PROJECTION
DRAWN BY L. WENGSTROM				
APPROVED BY DATE				
L. R. 5/9/06				
SIZE FSCM NO. 55335				
DRAWING NO. BXA-12529				
RELEASED DATE 3/10/03				
REVISION DATE 5/9/06				
REV. NO. B				
SHEET 1 OF 1				