


HIGH DENSITY BLUE LED FLEX RIBBON

Features

VOLTAGE: 24V DC
CURRENT: 2.0 Amps
LED VIEWING ANGLE (2 θ 1/2): 120°

STANDARD PACKAGING:
5 METER REEL (600 LED'S)

OPTIONAL PACKAGING:
INDIVIDUAL 500mm Sections (60 LED's)
Order as ZFS-125000HD-XX/SEC
NOTE: Individual sections ARE NOT supplied
with insulated wire connection.

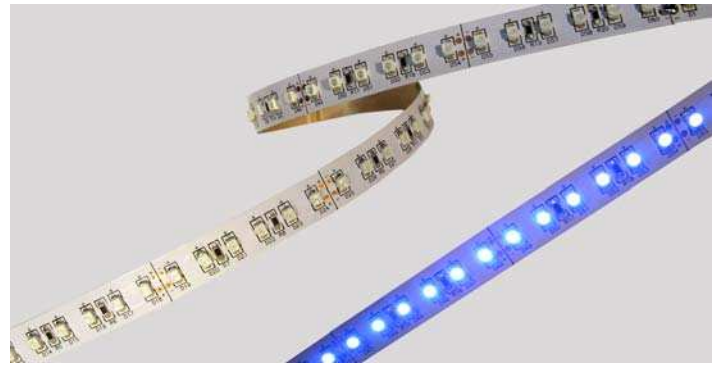


Maximum Ratings

Parameter	Symbol	Rating	Units
Forward Current	IF	2	A
Power Dissipation	PD	48	W
Electrostatic Discharge	ESD	800	V
Operating Temperature	Topr	-25~+60	°C
Storage Temperature	Tstg	-40~+80	°C

Accessories

ZPS-2435 24V, 35 Watt Power Supply
ZPS-2460 24V, 60 Watt Power Supply
ZDM-01 PWM LED Dimmer
Note: ZPS-2435 and ZPS-2460 require
use of wire nuts for connections.

Dimensions

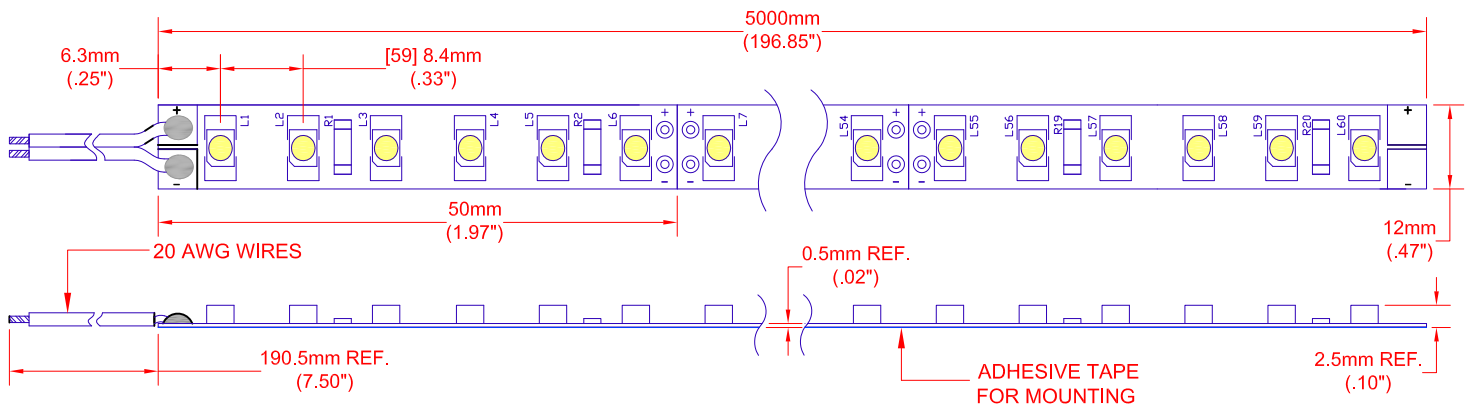

Electro-Optical Characteristics (Ta = 25°C)

JKL Part Number	Color	Number of LED's	Input Voltage (V DC)	Power (W)	Current (A)	Radiance Angle	CCT (K)	Lumen Flux (lm)
ZFS-125000HD-B	BLUE	600	24	48.0	2.0	120°	460 nm	1820

Note

Please refer to JKL Application Sheet JKL-AS-ZFS-LED FLEX for Installation and Power Recommendations.



ATTENTION

OBSERVE PRECAUTION
FOR HANDLING ELECTROSTATIC
DISCHARGE SENSITIVE DEVICES

METRIC			DIMENSIONS ARE IN mm (INCHES)			JKL COMPONENTS CORPORATION		
THIRD ANGLE PROJECTION			TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- REF. 2 PL +/- REF. ANGLE +/-			TITLE 24V HIGH DENSITY BLUE LED FLEX RIBBON,		
A	CHANGE LINE DRAW. & PHOTO	7/23/13	DRAWN BY L. WENGSTROM	APPV'D BY L.R.	DATE 7/23/13	SIZE A	FSCM NO. 55335	DRAWING NO. ZFS-125000HD-B
REV. NO.	DESCRIPTION/ECO NUMBER	APPV'D DATE	- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED			SCALE NONE	RELEASED DATE 5/23/11	REVISION DATE 7/23/13
							REV. NO. A	SHEET 1 OF 1