



REV.	DESCRIPTION/ECO NO.	DATE
	RELEASED	5/30/08

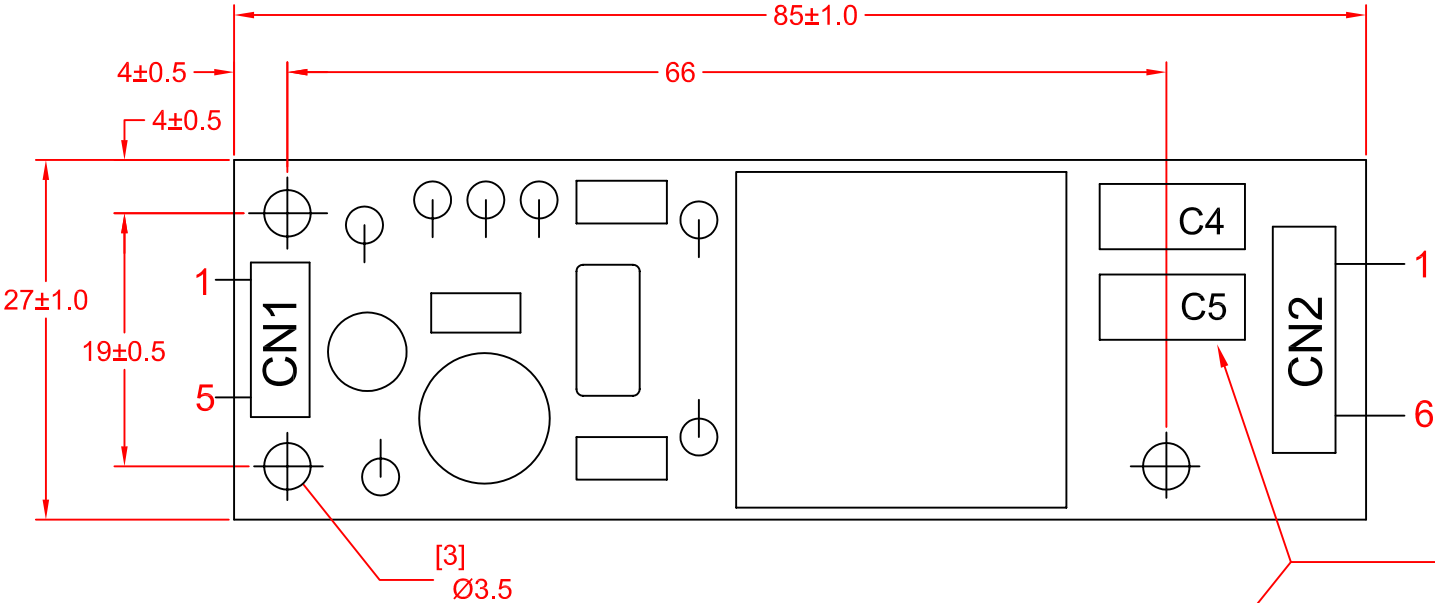

NOTE:
C4: 27PF, 3KV
C5: 27PF, 3KV

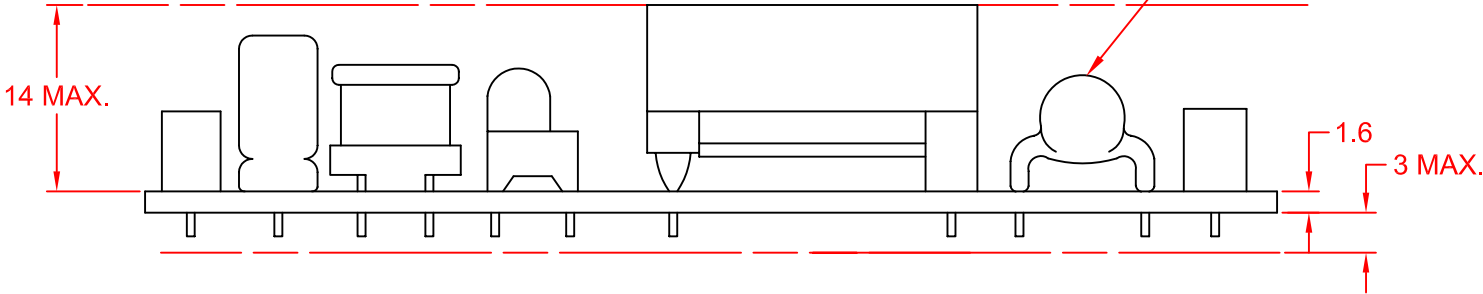


NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	BXC-10605
	2	
	3	
	4	
	5	
CN2	1	BXC-10992
	2	
	3	
	4	
	5	
	6	OUT LAMP GND 1 & 2

NOTE:
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10605 AND BXC-10992 CAN BE ORDERED SEPARATELY.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	550	1000
OUTPUT VOLTAGE: (Vrms)	---	1500	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	---
OUTPUT FREQUENCY: (kHz)	20	30	40
DIMMING RANGE (OPTION)	10% REF.	---	100% REF.
OPERATING TEMP: (CELSIUS)	0	25	50

METRIC  THIRD ANGLE PROJECTION		DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.3 2 PL +/- ANGLE +/- 0		JKL COMPONENTS CORPORATION TITLE INVERTER WITH DIMMING OPTION											
DRAWN BY L. WENGSTROM		APPV'D BY LARRY R.		DATE 5/30/08		SIZE A		FSCM NO. 55335		DRAWING NO. BXA-12579/MOD5					
- CAD DRAWING - MANUAL REVISIONS NOT PERMITTED						SCALE NONE		RELEASED DATE 5/30/08		REVISION DATE		REV. NO.		SHEET OF	