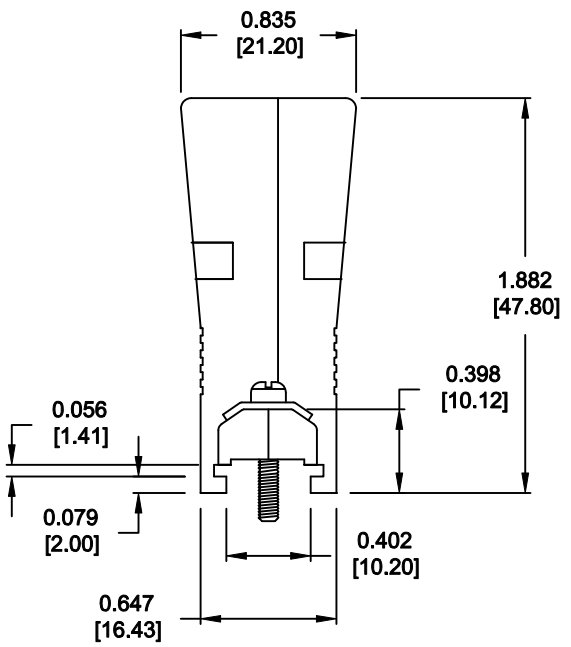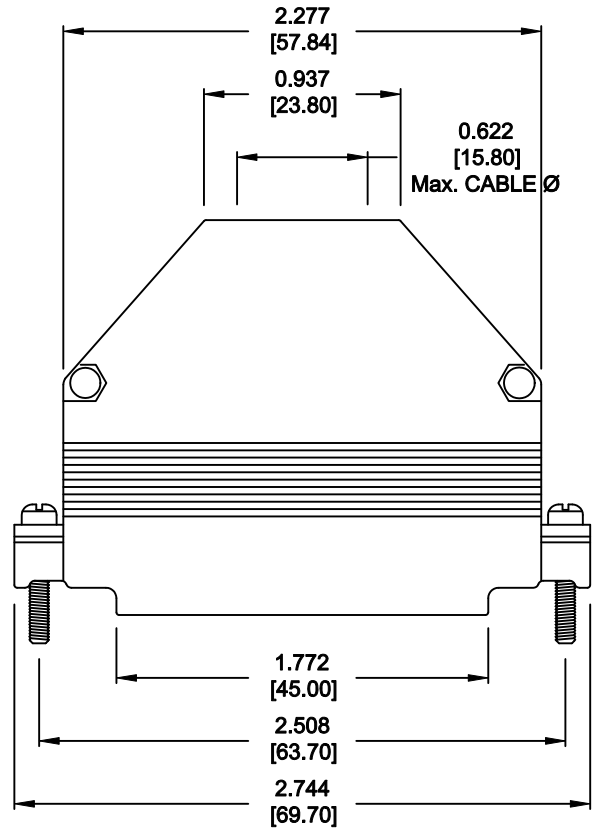DESCRIPTION: **979 SERIES D-SUB BACKSHELL - DIE CAST**

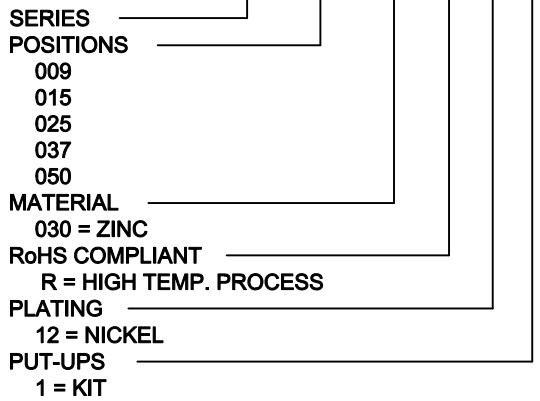ALL TOLERANCES = ±0.004 [±0.10]
UNLESS OTHERWISE INDICATED

BACK SHELL KIT INCLUDES:

2 - BACK SHELL HALVES

2 - 4-40 MATING SCREWS

2 - SADDLE WASHERS

2 - HOUSING SCREWS

2 - HOUSING NUTS

1 - GROMMET TREE - VARIOUS SIZES
(NON-CONDUCTIVE GROMMETS)

MATERIAL: DIE-CAST ZINC ALLOY
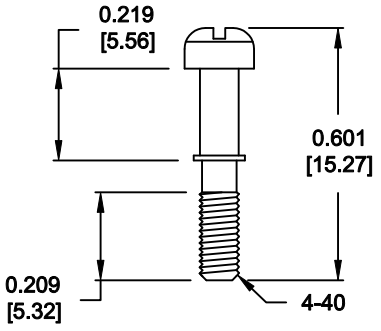PLATING: NICKEL
OPERATING
TEMPERATURE: -45°C TO + 120°C

2.277
[57.84]

0.937
[23.80]

0.622
[15.80]
Max. CABLE Ø

0.835
[21.20]

1.882
[47.80]

0.398
[10.12]

0.056
[1.41]

0.079
[2.00]

0.647
[16.43]

0.402
[10.20]

1.772
[45.00]

2.508
[63.70]

2.744
[69.70]

979-037-030 R 12 1

SERIES
POSITIONS
009
015
025
037
050
MATERIAL
030 = ZINC
RoHS COMPLIANT
R = HIGH TEMP. PROCESS
PLATING
12 = NICKEL
PUT-UPS
1 = KIT

DO NOT SCALE FROM DRAWING

DRAWN: C. SMITH	DATE: 03-18-10	
CHECKED:	DATE:	

NorComp

RoHS COMPLIANT

SCALE: 1 : 1	SHEET 1	OF 1	REV 2

DWG NO. **979-037-030R121**

DESCRIPTION: 979 SERIES D-SUB BACKSHELL - HARDWARE

MATING SCREW

0.219 [5.56]

0.601 [15.27]

0.209 [5.32]

4-40

HOUSING SCREW

0.437 [11.10]

0.503 [12.77]

4-40

MAX. CABLE DIAMETER

Ø0.300 [Ø7.62]

Ø0.400 [Ø10.16]

Ø0.490 [Ø12.45]

0.620 [15.75] TYP.

0.870 [22.10]

0.080 [2.03] TYP.

MATERIAL: NON CONDUCTIVE PVC - BLACK
TOLERANCE = ±0.010 [±0.25]
SCALE = 1 : 1

SADDLE WASHER

0.032 [0.80]

0.355 [9.02]

0.199 [5.05]

Ø0.122 [Ø3.10]

HOUSING NUT

0.189 [4.80]

4-40

0.075 [1.90]

ALL HARDWARE:

MATERIAL = BRASS
PLATING = NICKEL
TOLERANCE = ±0.002 [±0.05]
SCALE = 2 : 1

DO NOT SCALE FROM DRAWING

RoHS COMPLIANT

NC

NorComp

DRAWN: C. SMITH	DATE: 04-20-10
CHECKED:	DATE:

SCALE: AS SHOWN	SHEET 2	OF 2	REV 2

DWG NO. 979-037-030R121