


NOTE: **POWER CONTACTS COME** PRE-LOADED INTO INSULATORS 0.401 ± 0.012 -1.311 -SIGNAL CONTACTS 0.218 -0.164 0.520 0.433 0.470 Ø0.043 10-PLACES 0 0 0 Ø0.130 2-PLACES 0.420 0.370 0.109 Ø0.165 Ø0.148 TYP. 1-PLACE **PCB EDGE** 0.551 ± 0.012 **40 AMP POWER CONTACT 4-40 INSERT** ROHS COMPLIANT **BOARDLOCK** FOR Ø 0.130 HOLE DRAWN: DATE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT 06-11-13 M. SIGMON BE REPRODUCED, COPIED OR USED AS THE 0.451 [11.46] CHECKED: DATE: BASIS FOR THE MANUFACTURE OR SALE OF ±0.012[±0.30] APPARATUS WITHOUT WRITTEN PERMISSION SCALE: SHEET REV NorComp 1.5 = 12 0 DWG NO. MOUNTING HARDWARE 684S11W1103L461

DESCRIPTION: 684 SERIES CONTACTS

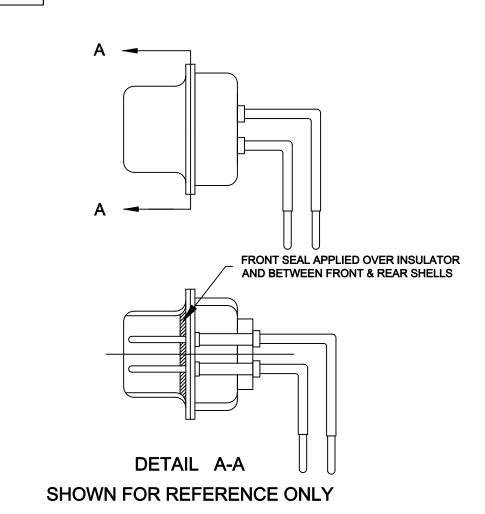

DESCRIPTION: SEALING PROCESS

ROHS COMPLIANT

