


DESCRIPTION: MALE CENTRONICS BACKSHELL KIT

- BACKSHELL KIT INCLUDES:**
- (1) SOLDER CUP CONNECTOR
 - (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
 - (1) FACE PLATE
 - (1) RUBBER GROMMET

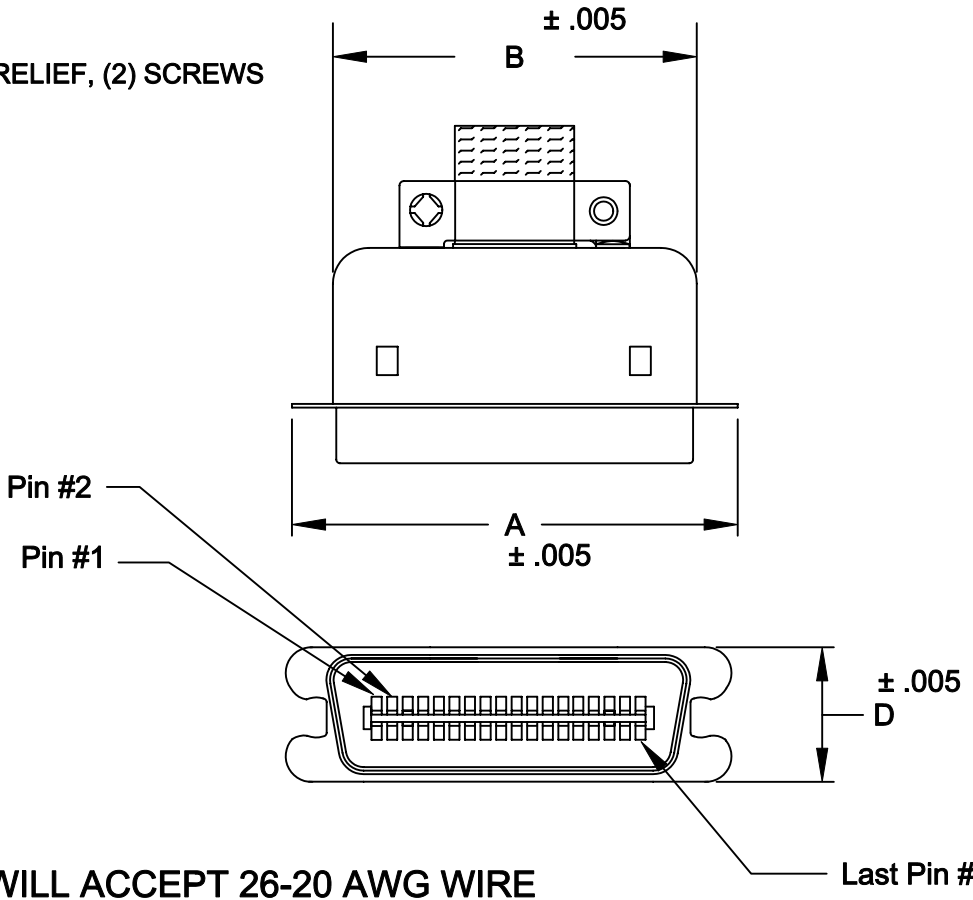

WILL ACCEPT 26-20 AWG WIRE

110-YYY-103L001

SERIES _____

POSITIONS _____

014 _____

024 - NOT AVAILABLE _____

036 _____

050 _____

GENDER _____

1 = MALE _____

2 = FEMALE _____

TERMINATION _____

0 = SOLDER CUP _____

SHELL PLATING _____


3 = NICKEL _____

HARDWARE OPTIONS _____

00 = NOT AVAILABLE _____

PLATING OPTIONS _____

1 = GOLD FLASH _____

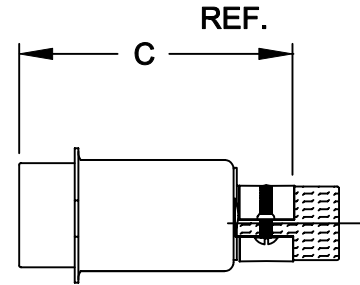

	A	B	C	D
014	1.496	1.132	1.572	.622
	38.00	29.75	40.06	15.80
024	1.919	1.593	1.560	.622
	48.75	40.45	39.61	15.80
036	2.431	2.090	1.624	.622
	61.76	53.10	41.25	15.80
050	3.026	2.677	1.730	.622
	76.86	68.00	43.95	15.80

MATERIALS:

INSULATOR: GLASS-FILLED THERMOPLASTIC
UL RATED 94V-0 - 230°C PROCESS TEMP.

CONTACTS: COPPER ALLOY

SHELL: STEEL, NICKEL PLATED

RoHS COMPLIANT

ELECTRICALS:

CONTACT CURRENT RATING: 5 AMPS

DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.

INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC

CONTACT RESISTANCE: 30 mOHMS MAXIMUM

OPERATING TEMPERATURE: -55°C TO +125°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: WAYNE ROBBINS	DATE: 7-15-05
	<h1>NorComp</h1>		CHECKED:	DATE:
SCALE: 1:1			SHEET 1 OF 1	REV 3
		DWG NO. 110-YYY-103L001		