


**BACKSHELL KIT INCLUDES:**

- (1) SOLDER CUP CONNECTOR
- (1) BACKSHELL WITH STRAIN RELIEF, (2) SCREWS
- (2) ASSEMBLY SCREWS
- (2) SPRING LATCHES
- (1) RUBBER GROMMET

**WILL ACCEPT 26-20 AWG WIRE**

110-YYY-203L001

SERIES \_\_\_\_\_  
 POSITIONS \_\_\_\_\_  
 014 \_\_\_\_\_  
 024 - NOT AVAILABLE \_\_\_\_\_  
 036 \_\_\_\_\_  
 050 \_\_\_\_\_  
 GENDER \_\_\_\_\_  
 1 = MALE \_\_\_\_\_  
 2 = FEMALE \_\_\_\_\_  
 TERMINATION: \_\_\_\_\_  
 0 = SOLDER CUP \_\_\_\_\_  
 SHELL PLATING \_\_\_\_\_  
 3 = NICKEL \_\_\_\_\_  
 HARDWARE OPTIONS: \_\_\_\_\_  
 00 = NOT AVAILABLE \_\_\_\_\_  
 PLATING OPTIONS \_\_\_\_\_  
 1 = GOLD FLASH \_\_\_\_\_

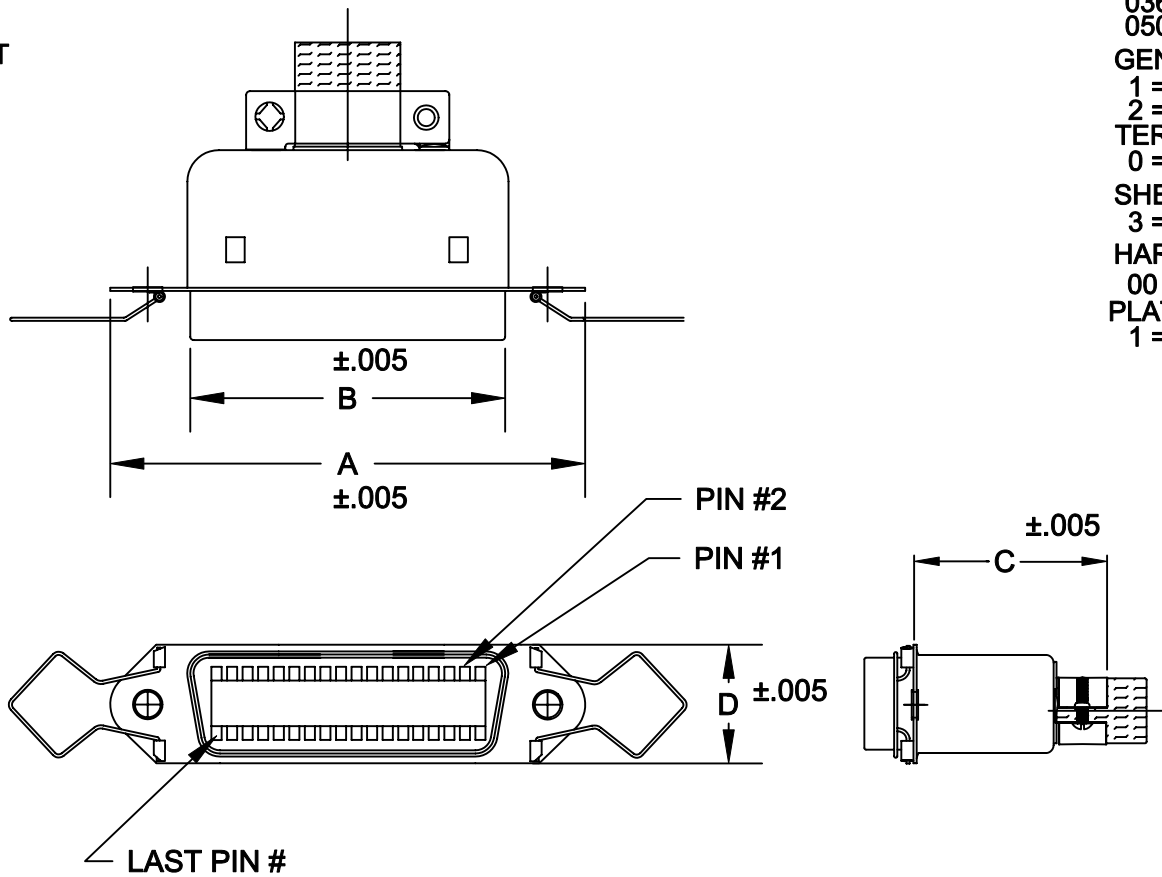

	A	B	C	D
14	1.729	.992	1.252	.622
	43.92	25.20	31.79	15.80
24	2.167	1.417	1.225	.622
	55.05	36.00	31.11	15.80
36	2.669	1.925	1.295	.622
	67.80	48.90	32.90	15.80
50	3.260	2.519	1.407	.622
	82.80	64.00	35.75	15.80

**MATERIALS:**

INSULATOR: GLASS-FILLED THERMOPLASTIC  
 UL RATED 94V-0 - 230°C PROCESS TEMP.  
 CONTACTS: COPPER ALLOY  
 SHELL: STEEL, NICKEL PLATED

RoHS COMPLIANT

**ELECTRICALS:**

CONTACT CURRENT RATING: 5 AMPS  
 DIELECTRIC WITHSTANDING VOLTAGE: AC 1200 R.M.S.  
 INSULATION RESISTANCE: 1000 mohms MINIMUM AT 500V DC  
 CONTACT RESISTANCE: 30 mOHMS MAXIMUM  
 OPERATING TEMPERATURE: -55°C TO +125°C

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: <b>WAYNE ROBBINS</b>	DATE: 7-15-05
			CHECKED:	DATE:
<b>NorComp</b>	SCALE: 1:1	SHEET 1	OF 1	REV 3
	DWG NO. 110-YYY-203L001			