

**DESCRIPTION: 0.085 RIBBON - DIP SOLDER** 

	014	024	036	050
Α	1.728	2.154	2.667	3.264
	43.90	54.70	67.75	82.90
В	0.992	1.417	1.925	2.624
	25.20	36.00	48.90	64.10
C	1.417	1.843	2.352	2.947
	36.00	46.80	59.74	74.85

## **MATERIAL**:

INSULATION: GLASS-FILLED THERMOPLASTIC

UL RATED 94V-0, 230°C PROCESS TEMP.

CONTACTS: COPPER ALLOY

SHELL: STEEL, NICKEL PLATED

## **ELECTRICAL:**

CURRENT RATING: 1 AMP


VOLTAGE RATING: 1,000V AC r.m.s.


VOLTAGE RATING: 1,000V ACT.M.S.


INSULATION RESISTANCE: 1,000MegOhms Min. @ 500VDC

CONTACT RESISTANCE: 30MilliOhms Max.

OPERATING TEMPERATURE: -55°C TO +125°C

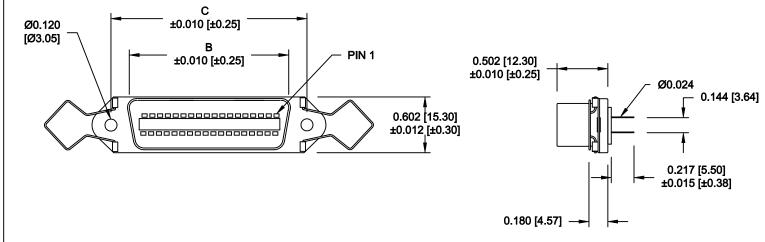

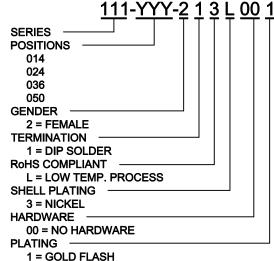

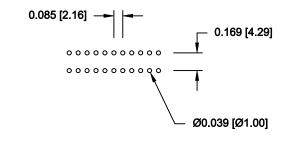

## NorComp

THESE DRAWINGS AND SPECIFICATIONS ARE

THE PROPERTY OF NorComp AND SHALL NOT

BE REPRODUCED, COPIED OR USED AS THE

BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION

DO NOT SCALE FROM DRAWING

DRAWN:
WAYNE ROBBINS
DATE:

O9-15-05

CHECKED:
DATE:

REV


7


SCALE: SHEET OF 1 2


DWG NO. 444 > 2.04 C 442 | 2.04 C 44


111-YYY-213L001


ROHS COMPLIANT

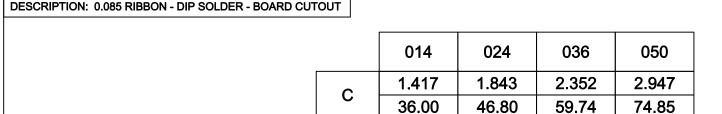

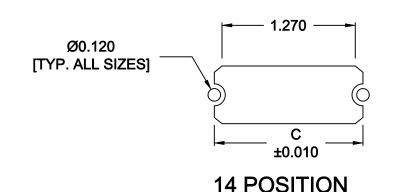

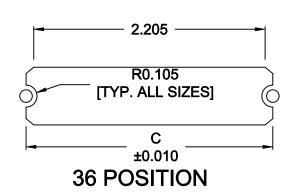

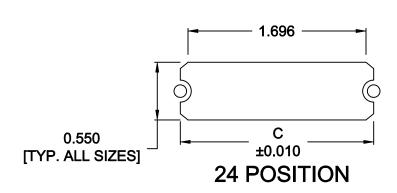

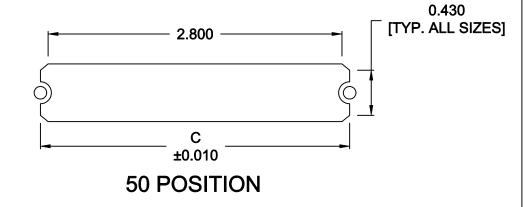

## \*\*\*NOTE\*\*\*DIMENSION "C" = CENTER TO CENTER OF MOUNTING HOLES CENTER OF RADI OVERALL LENGTH OF CUTOUT

NorComp

DO NOT SCALE FROM DRAWING

NONE 2 2

DWG NO. 111-YYY-213L001

ROHS COMPLIANT