


TYPICAL INDICATOR ORDERING EXAMPLE

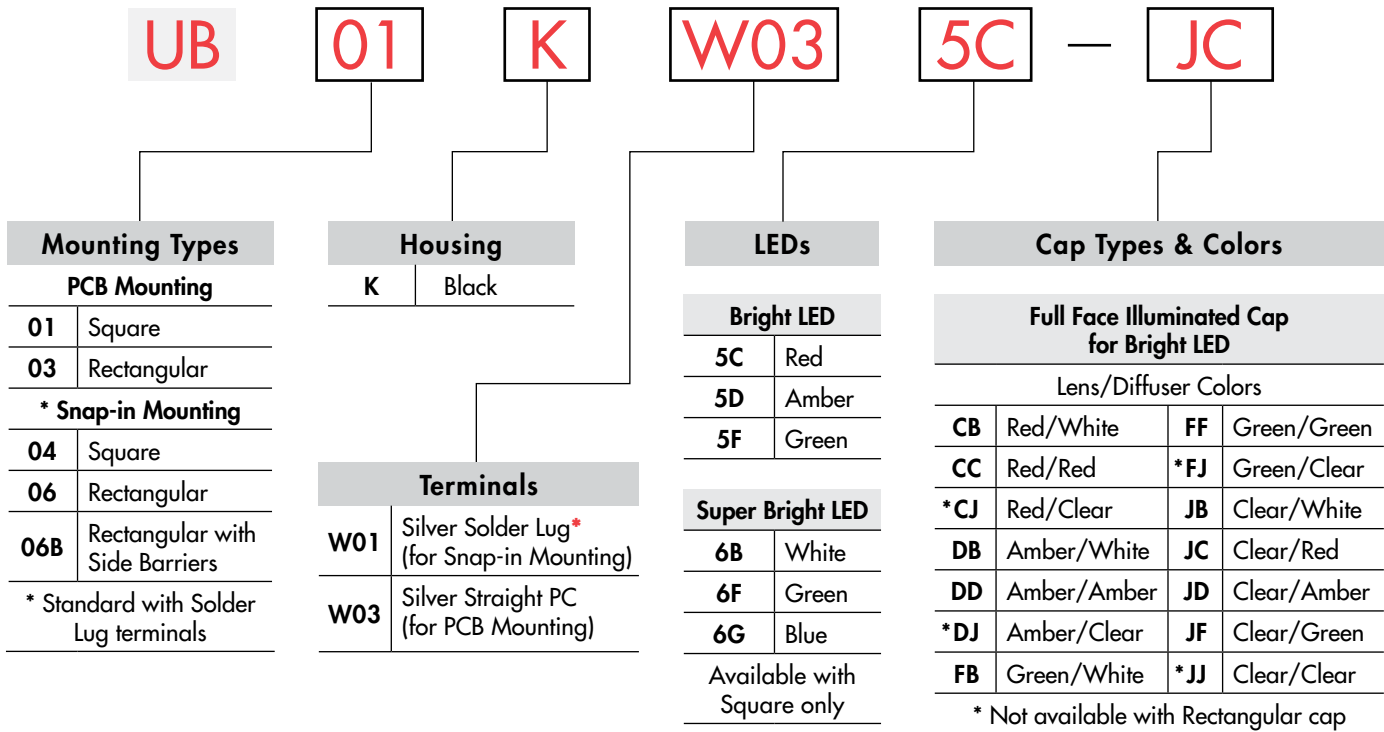

* Wire harness & cable assemblies offered only in Americas

DESCRIPTION FOR TYPICAL ORDERING EXAMPLE

UB01KW035C-JC



LED COLORS & SPECIFICATIONS

The electrical specifications shown are determined at a basic temperature of 25°C.
If the source voltage exceeds the rated voltage, a ballast resistor is required.
The resistor value can be calculated by using the formula in the Supplement section.

The LED is an integral part of the indicator and not available separately.

	Color	Bright			Super Bright			Unit
		5C	5D	5F	6B	6F	6G	
Forward Peak Current	I_{FM}	30	30	25	30	30	30	mA
Continuous Forward Current	I_F	20	20	20	20	20	20	mA
Forward Voltage	V_F	1.85	2.0	2.1	3.2	3.2	3.2	V
Reverse Peak Voltage	V_{RM}	5	5	5	5	5	5	V
Current Reduction Rate Above 25°C	ΔI_F	0.40	0.42	0.46	0.40	0.40	0.40	mA/°C
Ambient Temperature Range		-25° ~ +50°C			-25° ~ +50°C			

Note for Super Bright:




CAP TYPES & COLOR COMBINATIONS


Full Face Illuminated Cap for Bright LED

Lens/Diffuser


Colors Available for Square Cap:



AT4074
Lens




AT4075
Diffuser




Lens & Diffuser Material: Polycarbonate

Lens/Diffuser


Colors Available for Rectangular Cap:



AT4117
Lens



AT4118
Diffuser



Lens Finish: Glossy

Diffuser Finish: Textured



Full Face Illuminated Cap for Super Bright LED

Lens/Diffuser

Colors Available for Square Cap:



AT4074 Lens & AT4075 Diffuser
(Dimensioned above)



Lens & Diffuser Material: Polycarbonate

Lens Finish: Glossy

Rectangular lens & diffuser are not available for combining with super bright LED.

Diffuser Finish: Textured


Spot Illuminated Caps




Black Cap with Translucent White Window for LED Display

Material: Polycarbonate
Finish: Matte

AT4119 Square for Bright and Super Bright LED



AT4120 Rectangular for Bright LED



Color Codes:

A Black

B White

C Red


D Amber

F Green

J Clear


TYPICAL INDICATOR DIMENSIONS

Square • PCB Mount

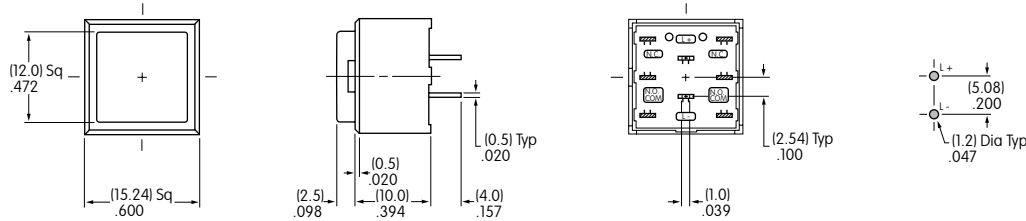


UB01KW035C-JC

Rectangular • PCB Mount

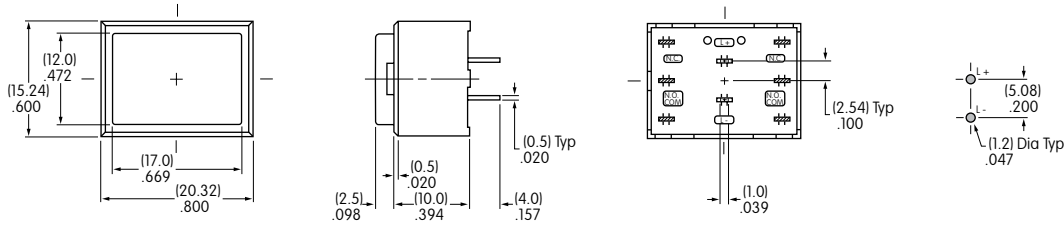

UB03KW035F-FF


Square • Snap-in Mount • Built-in Bezel

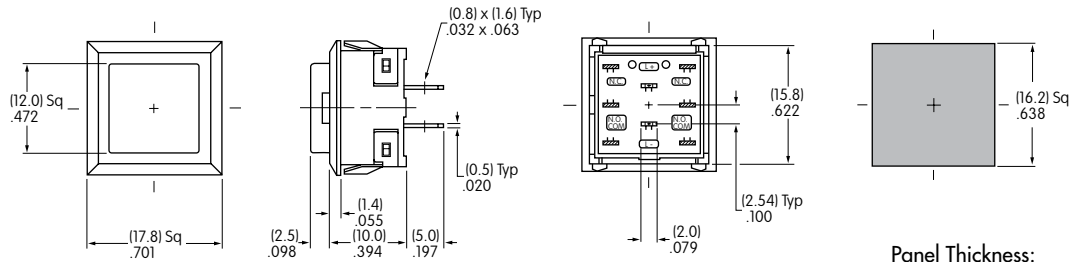

Panel Thickness:
1.0 ~ 3.2mm (.039 ~ .126")

UB04KW015C-JC


Rectangular • Snap-in Mount • Built-in Bezel

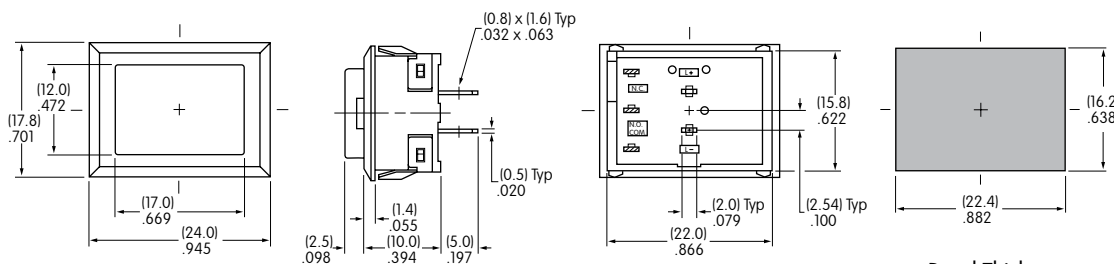

Panel Thickness:
1.0 ~ 3.2mm (.039 ~ .126")

UB06KW015D-DD

Rectangular • Snap-in Mount • Built-in Side Barriers

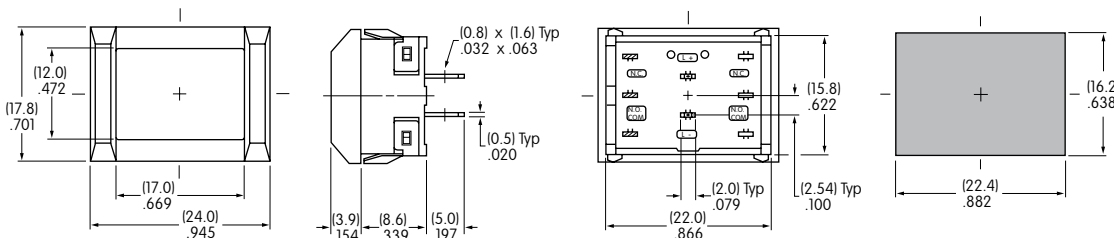

Panel Thickness:
1.0 ~ 3.2mm (.039 ~ .126")

UB06BKW015F-FF