


ED350/X (5.0 mm) EDZ350/X (5.08 mm)



2-12 poles, Spacing 5.0 mm and 5.08 mm
insert required no. of poles **X**
How to order see page 5

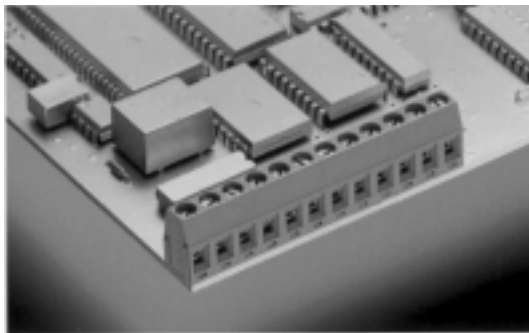

*factory wiring



Ratings:

| | | |
|------------------------|------------|---------------------|
| Rated Voltage | 300V | 250 V |
| Rated Current | 16 A | 24 A (T60) |
| Wire Size | AWG* 28-12 | 2.5 mm ² |
| Test Voltage | | 2.0 kV |
| Rated Torque/ScrewSize | | 0.5 Nm/M3 |

Max. Rated Cross Section

| | |
|-----------------------------|---------------------|
| Single Wire (solid) | 2.5 mm ² |
| Stranded Wire (flexible) | 1.5 mm ² |
| Stranded wire with Ferrules | 1.5 mm ² |

Dimensions

| | |
|-------------------|------------------|
| Spacing | 5.0 mm (5.08 mm) |
| PCB Hole Diameter | 1.3 mm |
| Stripped Length | 6.0 mm |

Materials

| | |
|---------------------|--------------|
| Insulating Material | PA |
| Flammability Class | UL94 V-0 |
| Temperature Range | -30°C/+105°C |
| Terminal Block | CuZn |
| Wire Guard | Cu |

Color

Green

