

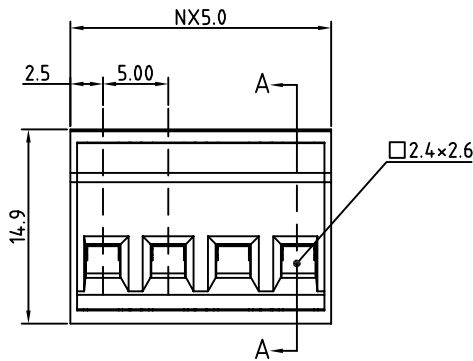


SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	CUL approval added	Lee

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



N=Number of poles

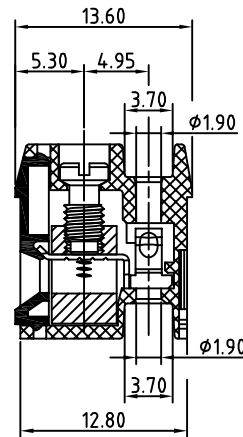

SECTION A-A

Material

- Insulating body Thermoplastic (UL94V-0)
- Insulating cover Thermoplastic (UL94V-0)
- Terminal screw Steel Zinc plating M3
- Terminal body(house) Brass, Ni plated
- Wire guard PhBz , Tin plated

Electrical

- Voltage rating: 300V
- Current rating: 15A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Torque: 4.5Lb-In
- Screw: M3
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- △ ● Safety Approval: us

RoHS Compliant

PART NUMBER:

OSTEOXX0100

No. of Poles
02: 2 Poles
:
:
24: 24 Poles

COLOR
0: Black (Standard)
5: Green
6: Blue
8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTEO 5.0 series (A type ϕ 1.90mm)				
PART NO.	OSTEOXX0100	DWG NO.	OSTEOXX0100.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.10.13	Marvin 2006.10.13	Aaron 2006.10.13	Aaron 2006.10.13		X. \pm 0.50	
					UNIT: mm	X.X \pm 0.30
				SHEET: 01/01	SCALE: NONE	X.XX \pm 0.10
				REV: C	X° \pm 1°	