
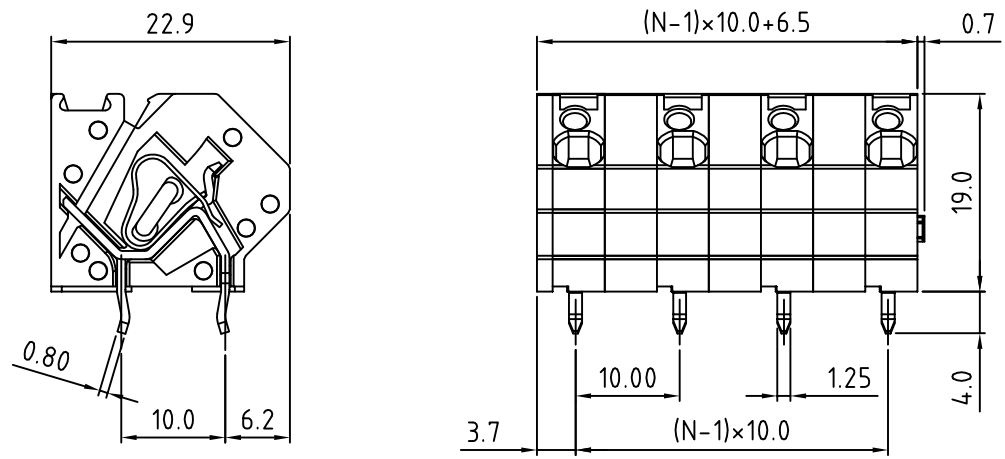
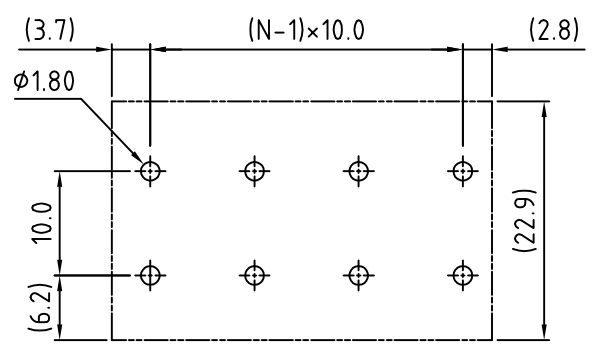


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

- Material:
- Terminal body
  - (Contact pin): Brass
  - Wire guard: Stainless steel
  - Surface of solder tail: Tin plated
  - Insulator(housing): Thermoplastic (UL94V-0)
- Electrical: cULus
- Voltage rating: 300V
  - Current rating: 10A
  - Wire range:
    - Solid wire(AWG): 12-28
    - Stranded wire(AWG): 12-28
  - Wire strip length: 8-9mm
  - Withstanding Voltage: 1.6KV
  - Operating temperature: -30°C to +105°C
  - Soldering temperature: 250°C±10°C/5 Sec
  - Safety Approval: 
- RoHS Compliant



N=Number of poles



P.C.B. LAYOUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

PART NUMBER:

**OSTH3XX2080**

No. of Poles	COLOR
02: 2 Poles	0: Black
03: 3 Poles	2: Red
...	5: Green
24: 24 Poles	8: Grey (Standard)
	C: Multiple Colors



TITLE		OSTH3 10.0mm series, 2-24p	
PART NO.	OSTH3XX2080	DWG NO.	OSTH3XX2080.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.11.07	Marvin 2006.11.07	Tony 2006.05.30	Tony 2006.05.30
SHEET: 01/01		Tolerance	
		X.	±0.50
		X.X	±0.30
		X.XX	±0.10
		X°	±1°