

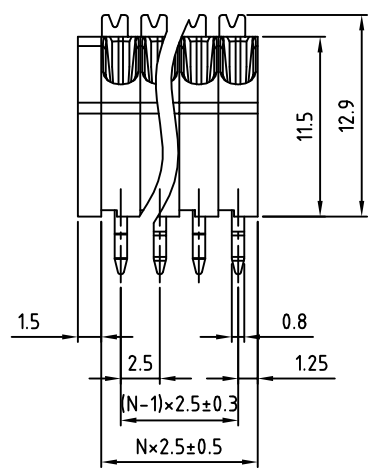



SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

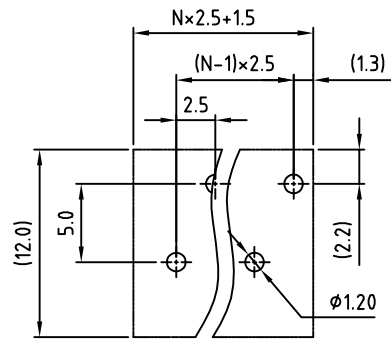

N=Number of Contacts

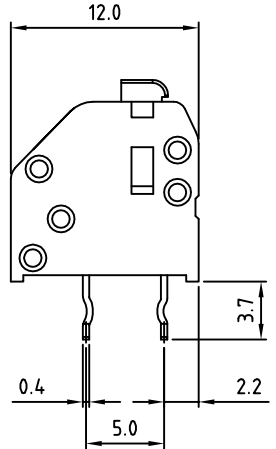

P.C.B Layout

Poles	Tolerance
2P-5P	±0.30
6P-9P	±0.40
10P-13P	±0.50
14P-17P	±0.60
18P-21P	±0.70
22P-24P	±0.80

Material

- Terminal body(Contact pin) : PhBz
- Surface of solder tail : Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 150V
- Current rating: 2A
- Wire range:
  - Solid wire(AWG): 20-26
  - Stranded wire(AWG): 20-26
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.3KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety approval:



RoHS Compliant

PART NUMBER

OSTHCXXB080

- No. of Poles
- 02 2 Poles
  - 03 3 Poles
  - ::
  - 24 24 Poles
- COLOR
- 2: Red
  - 3: Orange
  - 5: Green
  - 8: Grey (Standard)



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTHC 2.5mm Series	
PART NO.	OSTHCXXB080	DWG NO.	OSTHCXXB080.DWG
APPROVED	CHECKED	DESIGNED	DRAWN
Shi Jun 2006.11.16	Marvin 2006.11.16	Steady 2006.10.10	Steady 2006.10.10
SHEET: 01/01		Tolerance	
UNIT: mm		X. ±0.50	
SCALE: NONE		X.X ±0.30	
REV: D		X.XX ±0.10	
		X° ±1°	