

SIGN	DATE	DESCRIPTION	APPROVER
------	------	-------------	----------

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Insulator(housing): Thermoplastic (UL94V-0)
- Wire guard: Stainless steel
- Terminal Body(contact pin): PhBz.
- Insulator(Cover): Thermoplastic (UL94V-0)

Electrical:



- Voltage rating: 300 V
- Current rating: 15 A
- Wire range:
 - Solid wire(AWG): 12-28
 - Stranded wire(AWG): 12-28
- Wire strip length: 6-7 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -33°C to +105°C
- RoHS Compliant

PART NUMBER:

OSTHIXX3051

- No. of Poles
- 02: 2 Poles
 - 03: 3 Poles
 -
 - 16: 16 Poles

- COLOR:
- 0: Black
 - 5: Green (Standard)
 - 6: Blue
 - 8: Grey

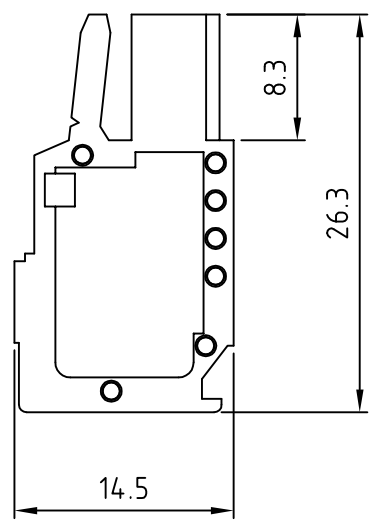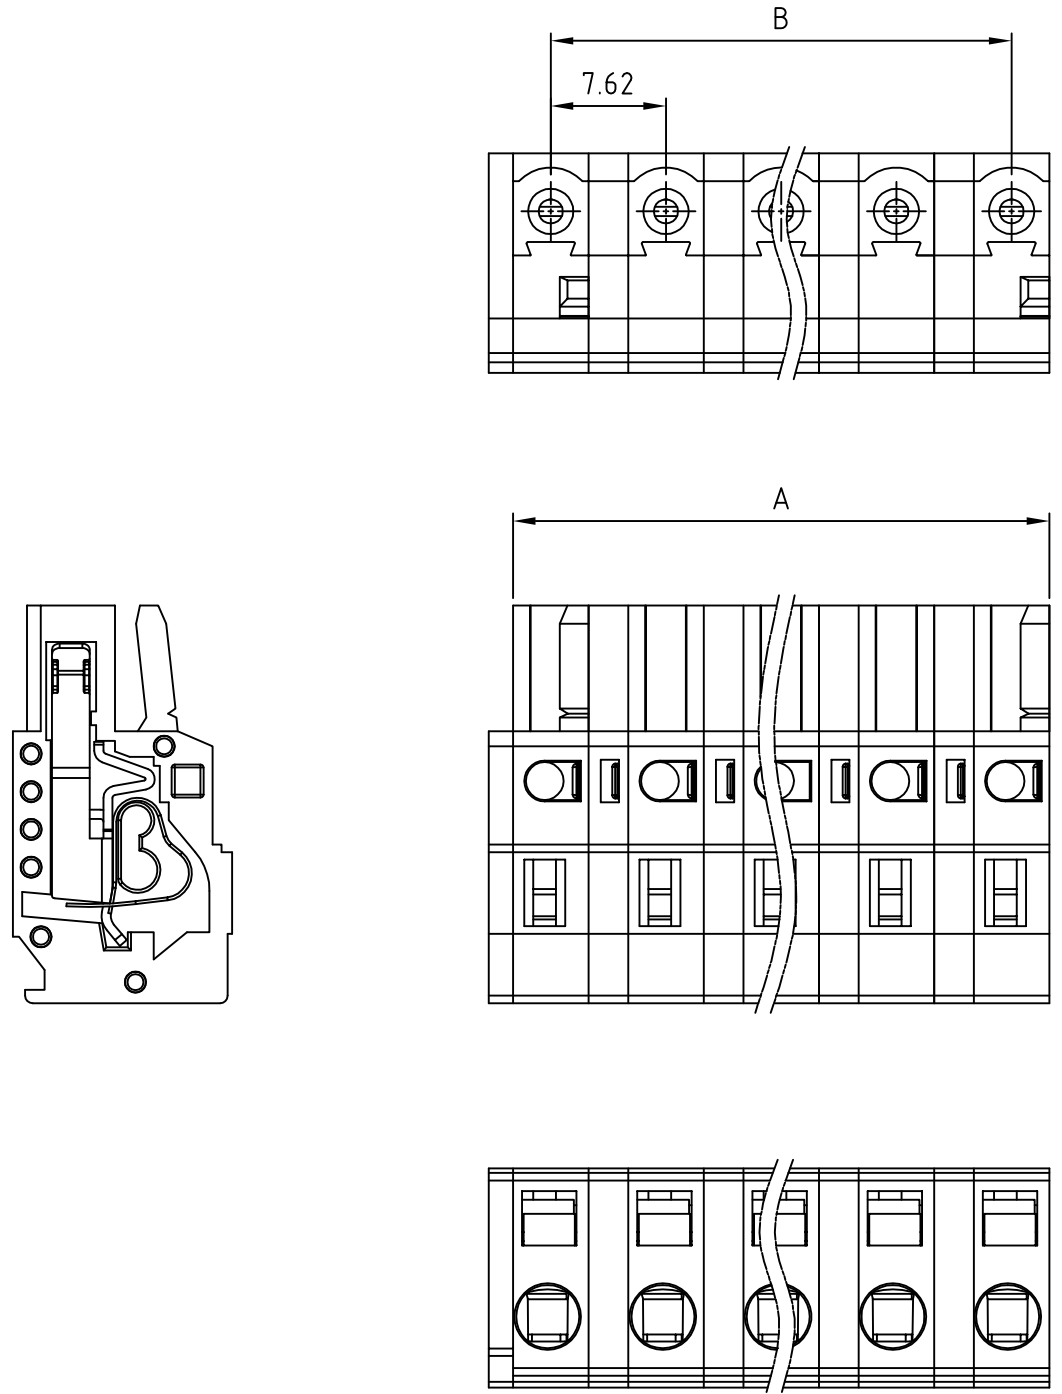

POLE		2	3	4	5	6	7	8
A		12.62	20.24	27.86	35.48	43.10	50.72	58.34
B		7.62	15.24	22.86	30.48	38.10	45.72	53.34
Tol.		±0.10			±0.15			
POLE	9	10	11	12	13	14	15	16
A	65.96	73.58	81.20	88.82	96.44	104.06	111.68	119.30
B	60.96	68.58	76.20	83.82	91.44	99.06	106.68	114.30
Tol.		±0.20			±0.30			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE	OSTHI 7.62mm With Pillar Series						
PART NO.	OSTHIXX3051			DWG NO.	OSTHIXX3051.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance		
		Tony 2006.10.23	Tony 2006.10.23			UNIT: mm	X. ±0.50
						SCALE: NONE	X.X ±0.30
					SHEET: 01/01	REV.: B	X.XX ±0.10
							X° ±1°