
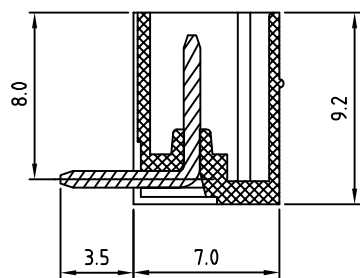
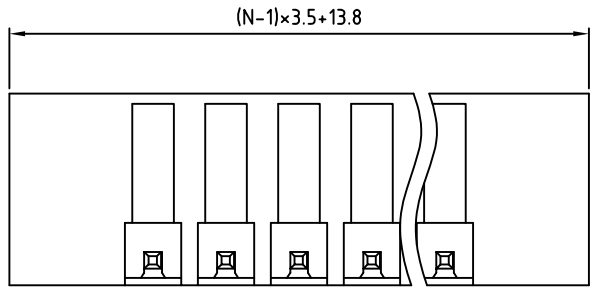



| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
| | | | |
| | | | |
| | | | |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

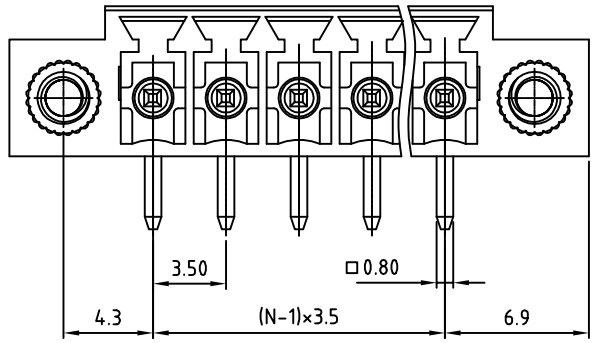

N= Number of contacts

P.C.B LAYOUT

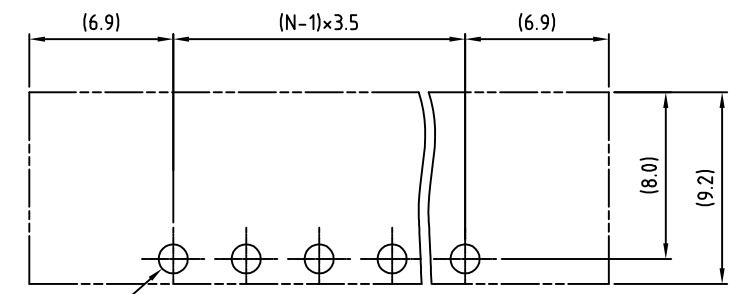

Ø1.40

- Material**
- Terminal body
 - (contact pin): Brass(CuZn) Tin plated
 - With flange nut: Brass M2.5
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical cULus/CSA/VDE**
- Voltage rating: 300VAC/125VAC/125VAC
 - Current rating: 10A/8A/10.5A
 - Withstanding Voltage: 1.6KV/1.6KV/2.5KV
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec
 - Safety Approval:



RoHS Compliant

PART NUMBER:

OSTOQXX1551

- | | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02: 2 Poles | 0: Black |
| 03: 3 Poles | 5: Green (Standard) |
| | 6: Blue |
| 24: 24 Poles | 8: Grey |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

| | | | | | | |
|-----------------------|----------------------|---|----------------------|--------------|-----------------|------------|
| TITLE | | OSTOQ 3.5mm Series with flange right-angle 2P-24P | | | | |
| PART NO. | OSTOQXX1551 | | | DWG NO. | OSTOQXX1551.DWG | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | | |
| Shi Jun 2006.10.30 | Marvin 2006.10.30 | Marvin 2006.10.30 | Marvin 2006.10.30 | | | |
| | | | | | UNIT: mm | Tolerance |
| | | | | | SCALE: NONE | X. ±0.50 |
| | | | | SHEET: 01/01 | REV.: G | X.X ±0.30 |
| | | | | | | X.XX ±0.10 |
| | | | | | | X° ±1° |