




| SIGN | DATE | DESCRIPTION | APPROVER |
|---|------|-------------|----------|
| | | | |
| <i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i> | | | |

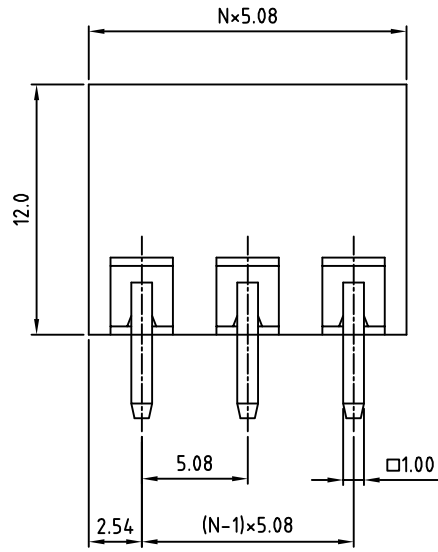



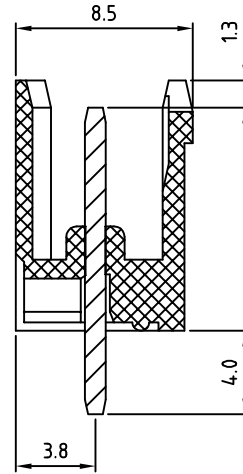

N = Number of poles



Material

- Terminal body
(contact pin): Brass(CuZn) Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical cULus/CSA/VDE/TUV

- Voltage rating: 300VAC/250VAC/300VAC/300VAC
- Current rating: 20A/15A/20A/20A
- Withstanding Voltage: 1.6KV/1.6KV/2.5KV/2.5KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval:    

RoHS Compliant


PART NUMBER:

OSTOQXX5350

No. of Poles
02: 2 Poles
:
:
24: 24 Poles


COLOR
0: Black
5: Green (Standard)
6: Blue
8: Grey

P.C.B LAYOUT

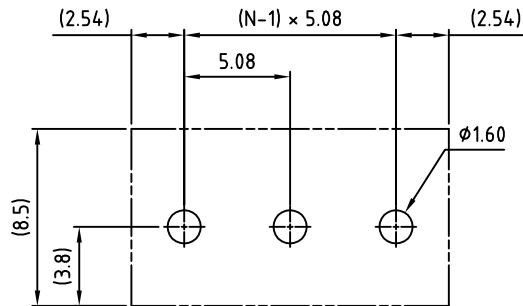

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



| | | | | | |
|-----------------------|----------------------|--|----------------------|---|---|
| TITLE | | OSTOQ 5.08mm series Open vertical 2p-24p | | | |
| PART NO. | OSTOQXX5350 | DWG NO. | OSTOQXX5350.DWG | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | Tolerance |
| Shi Jun 2006.10.31 | Marvin 2006.10.31 | Marvin 2006.10.31 | Marvin 2006.10.31 |  | X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1° |
| SHEET: 01/01 | | | | UNIT: mm SCALE: NONE REV.: G | |