


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

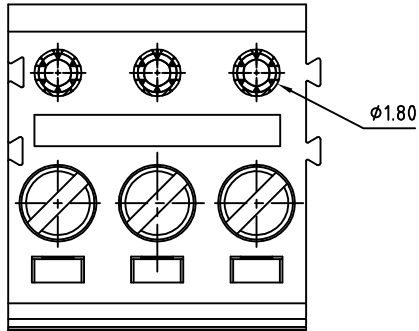

Material

- Terminal body
(metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Wire guard: PhBz, Tin plated.
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
Solid wire(AWG): 16-28
Stranded wire(AWG): 16-28
- Torque(Lb-In): 1.7
- Screw: M2
- Wire strip length: 5-6mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Safety approval: us

RoHS Compliant

Part Number:

OSTTTXX4150

No. of Poles

02: 2 Poles

03: 3 Poles

... ..

24: 24 Poles



COLOR

0: Black

5: Green (Standard)

6: Blue

8: Grey

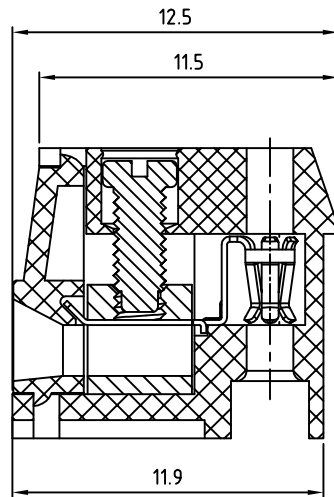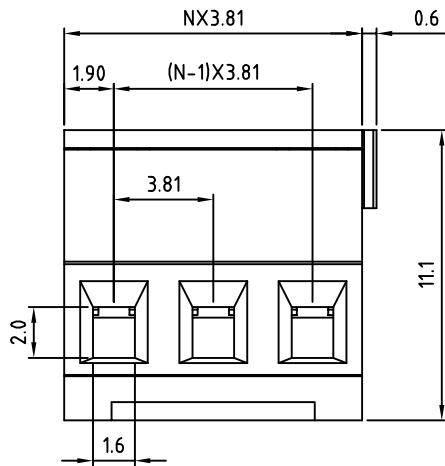

N=Number of contacts

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE								OSTTT-3.81mm Series (6-finger contacts)	
PART NO.		OSTTTXX4150		DWG NO.		OSTTTXX4150.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance			
Marvin 2006.10.23	Marvin 2006.06.24	Marvin 2006.06.24	Marvin 2006.06.24			UNIT: mm	X. ±0.50		
						SCALE: NONE	X.X ±0.30		
						SHEET: 01/01	X.XX ±0.10		
						REV.: D	X° ±1°		