

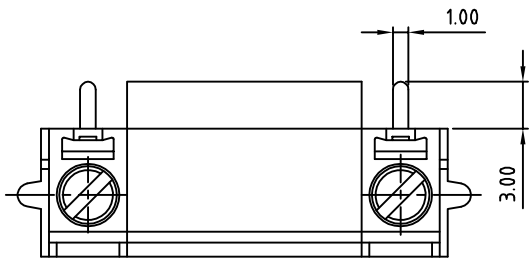


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

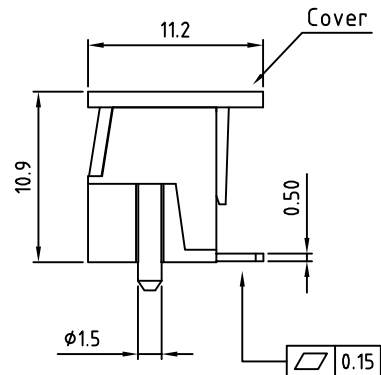

- Material**
- Terminal body (metal housing): Brass(CuZn)
  - Terminal screw: Steel Zinc plating "-" slot type
  - Contacts: Brass
  - Surface of solder tail: Tin plated
  - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical**
- Voltage rating: 300VAC
  - Current rating: 6A
  - Wire range: Solid wire(AWG): 14-30  
Stranded wire(AWG): 14-30
  - Torque(Lb-in): 3.5
  - Screw: M3
  - Wire strip length: 6-7mm
  - Withstanding Voltage: 1.6KV
  - Operating temperature: -45°C to +130°C
  - Soldering temperature: 260°C±10°C/5 Sec SUITABLE FOR REFLOW

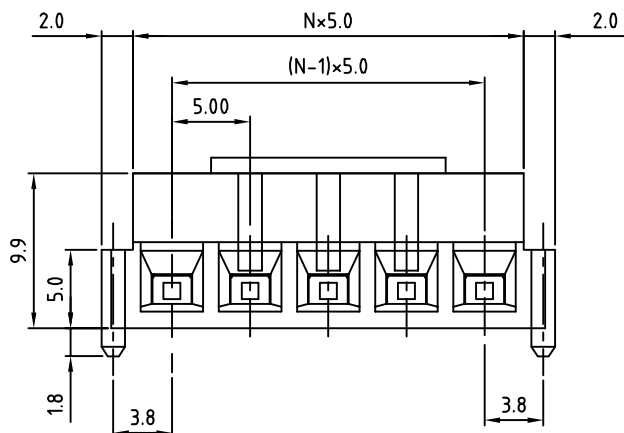

RoHS Compliant

PART NUMBER:


**OSTTZXX0101**

No. of Poles  
 02 2 Poles  
 03 3 Poles  
 ... ..  
 07 07 Poles

COLOR  
 0: Black

N=Number of poles(2pole-7pole)

RECOMMENDED P.C.B LAYOUT

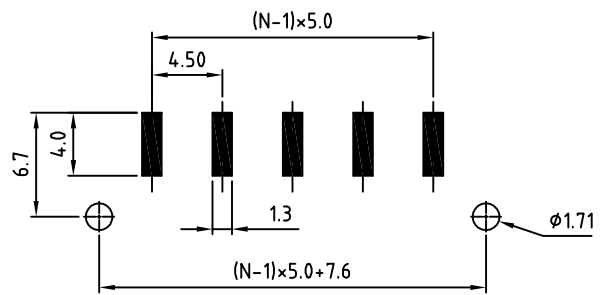

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTTZ 5.0mm series with cover 2p-7p			
PART NO.	OSTTZXX0101	DWG NO.	OSTTZXX0101.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23	Marvin 2006.10.23		X. ±0.50
					X.X ±0.30
				SHEET: 01/01	X.XX ±0.10
				REV.: D	X° ±1°