

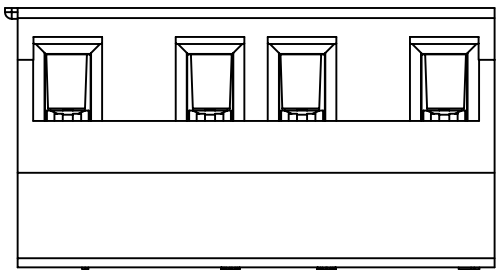


| SIGN | DATE | DESCRIPTION | APPROVER |
|------|------|-------------|----------|
| △    |      |             |          |
| △    |      |             |          |
| △    |      |             |          |

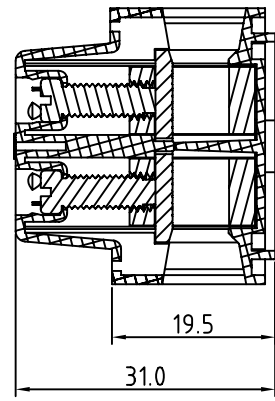

- Technical data:
- Material:
- Insulator body : Polyamide(Glass filled).(UL94V-0).
  - Contact : Brass,tin plated.
  - Connector body: Brass(CuZn),nickel plated.
  - Terminal screw : Steel Galvanized and chromitized or Nickel plated or Tin plated.
- Standard Color: Grey
- Electrical:
- Voltage rating : 600VAC
  - Current rating : 65 Amps/way max
  - wire range : 6-22AWG

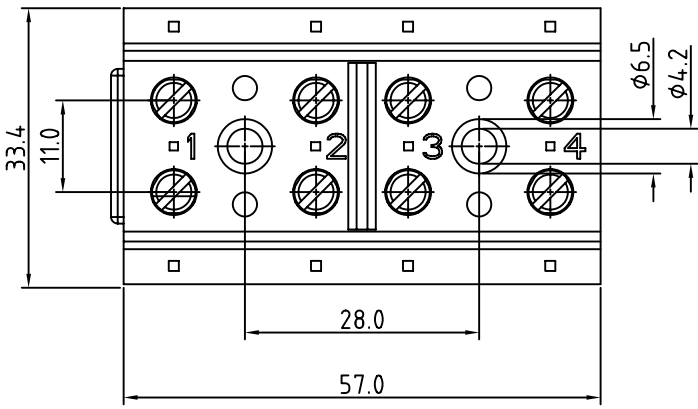

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

**OST** ON-SHORE TECHNOLOGY, INC.

|  |            |             |            |                              |  |
|--|------------|-------------|------------|------------------------------|--|
| PART NAME: OSTV4 Series 4P                             |            |             |            | TITLE:                       |  |
| PART NO.: OSTV4XX0180 (XX DENOTES NUMBER OF POSITIONS) |            |             |            | DWG NAME: OSTV4XX0180.DWG    |  |
| APPROVED BY  | CHECKED BY | DESIGNED BY | DRAWN BY   | CUSTOM NO.:                  | Tolerance<br>X. ±0.50<br>X.X ±0.30<br>X.XX ±0.10<br>X° ±1° |
|  |            | Shi jun     | 2003.06.29 | 2003.06.29                   |  |
|  |            |             |            | UNITS: MM                    |  |
|  |            |             |            | SCALE: 1.5/1<br>REVISION: B1 |  |