

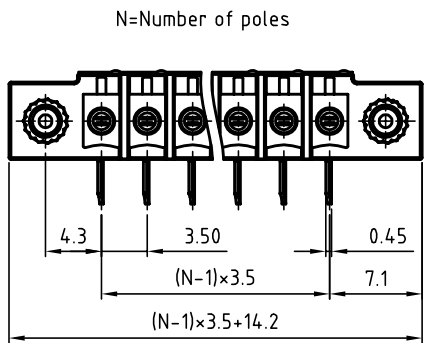


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

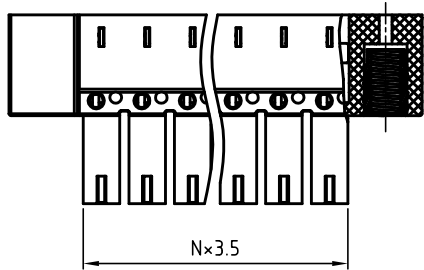

- Material**
- Wire guard: PhBz(CuZn)
 - Surface of solder tail: Tin plated
 - With Flange Nut Brass M2.5
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical**
- Voltage rating: 300VAC
 - Current rating: 8A
 - Withstanding Voltage: 1.6kv
 - Operating temperature: -30°C to +105°C
 - Soldering temperature: 250°C±10°C/5 Sec


RoHS Compliant

PART NUMBER:

OSTV7XX1251

↓	↓
No. of Poles	COLOR
02 2 Pole	0: Black
03 3 Pole	5: Green (Standard)
... ..	6: Blue
24 24 Pole	8: Light Grey

P.C.B LAYOUT

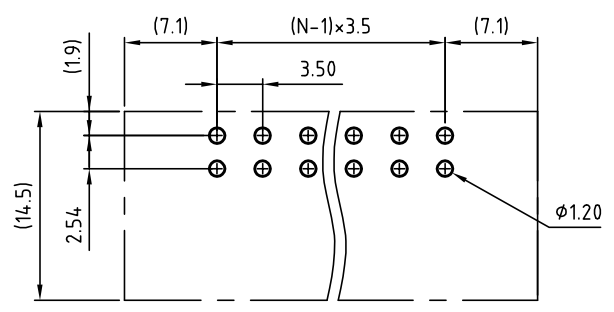

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV7 3.5 series W/F 90° Right angle 2p-24p			
PART NO.	OSTV7XX1251	DWG NO.	OSTV7XX1251.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.10	Shi Jun 2006.11.10	Tason 2006.11.10	Tason 2006.05.29		X. ±0.5 X.X ±0.3 X.XX ±0.1 X° ±1°
				UNIT: mm	
				SCALE: NONE	
				REV.: B	
				SHEET: 01/01	