

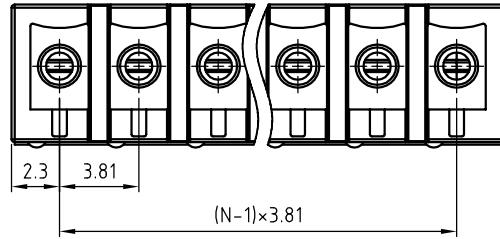


SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

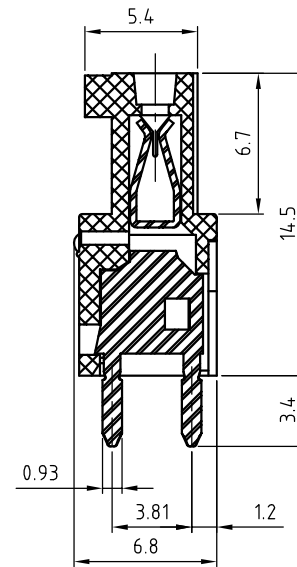

N=Number of contacts

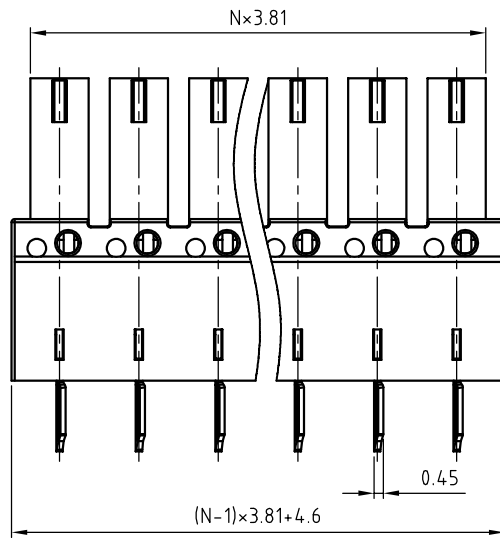

Material

- Wire guard: PhBz(CuZn)
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 8A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec


RoHS Compliant

PART NUMBER:

OSTV7XX3150

No. of Poles	COLOR
07 7 Poles	0: Black
08 8 Poles	5: Green (Standard)
...	6: Blue
24 24 Poles	8: Grey

PCB LAYOUT

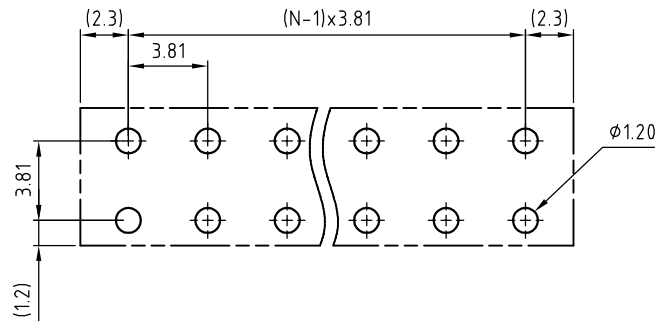

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV7 3.81mm Series 180° Vertical 7p-24p		DWG NO.		OSTV7XX3150.DWG	
PART NO.		OSTV7XX3150		CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	UNIT: mm		Tolerance	
Shi Jun 2006.11.10	Shi Jun 2006.11.10	Tason 05/29`06	Tason 06/29`06	SCALE: NONE		X. ±0.5	
				SHEET: 01/01		X.XX ±0.3	
				REV.: B		X.XX ±0.1	
						X° ±1°	