





SIGN	DATE	DESCRIPTION	APPROVER
<b>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</b>			

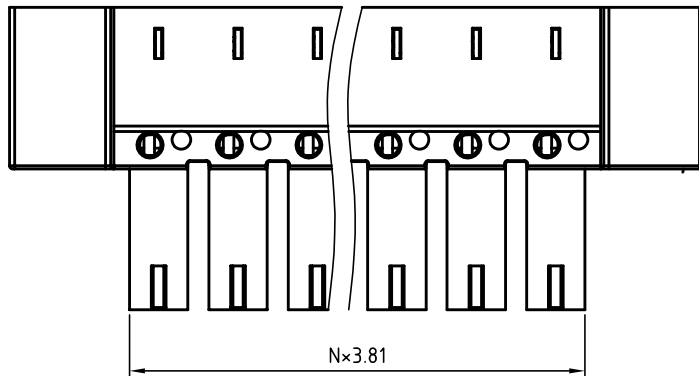

N=Number of contacts

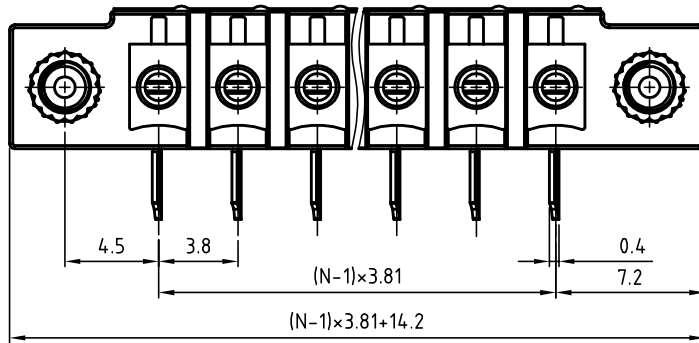

P.C.B LAYOUT

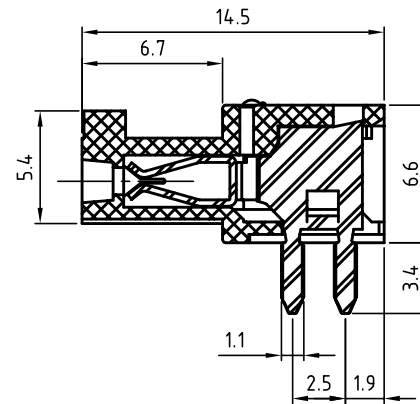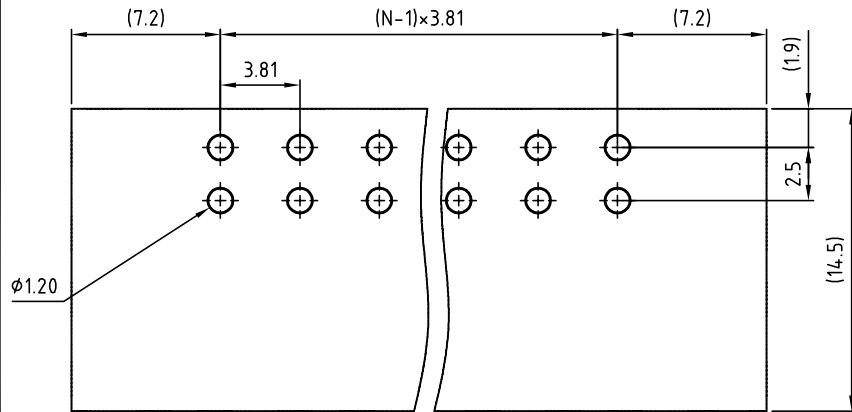

**Material**

- Wire guard: PhBz(CuZn)
- Surface of solder tail: Tin plated
- With Flange Nut Brass M2.5
- Insulator (housing): Thermoplastic (UL94V-0)

**Electrical**

- Voltage rating: 300VAC
- Current rating: 8A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

RoHS Compliant

PART NUMBER:

**OSTV7XX3251**

No. of Poles	COLOR
02 2 Pole	0: Black
03 3 Pole	5: Green (Standard)
... ..	6: Blue
24 24 Pole	8: Light Grey



TITLE		OSTV7 3.81mm series W/F 90° Right angle 2p-24p			
PART NO.		OSTV7XX3251		DWG NO. OSTV7XX3251.DWG	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
Shi Jun 2006.11.10	Shi Jun 2006.11.10	Tason 05/29`06	Tason 05/29`06		
					Tolerance
					X. ±0.5
				UNIT: mm	X.X ±0.3
				SCALE: 4/1	X.XX ±0.1
				SHEET: 01/01	X° ±1°
				REV.: B	

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.