


SIGN	DATE	DESCRIPTION	APPROVER
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

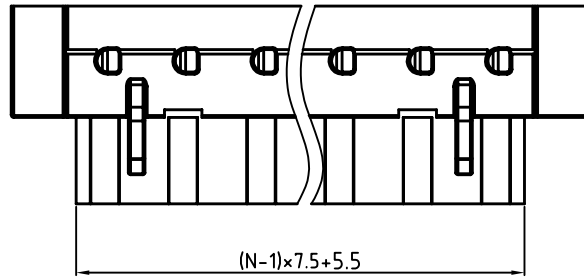



N=Number of poles

Material

- Wire guard: PhBz(CuSn)
 - Surface of solder tail: Tin plated
 - With Flange Nut Brass M2.5
 - Insulator (housing): Thermoplastic (UL94V-0)
- Electrical**

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec

RoHS Compliant

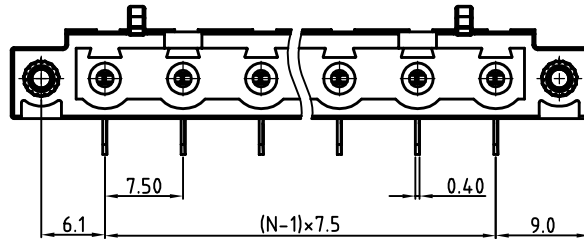


PART NUMBER:

OSTV7XXA251

No. of Poles
 02 2 Pole
 03 3 Pole

 16 16 Pole

COLOR
 0: Black
 5: Green (Standard)
 6: Blue
 8: Light Grey

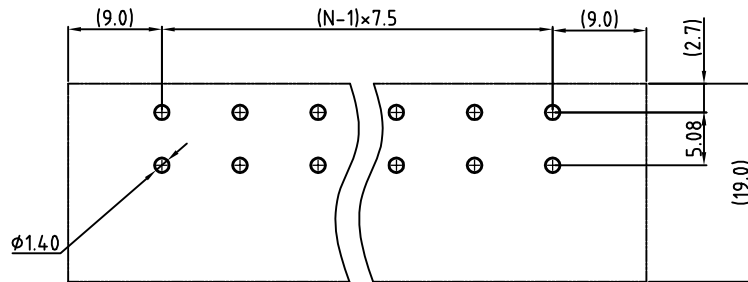

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTV7 7.5mm Series W/F 90° Right angle 2p-16p				
PART NO.	OSTV7XXA251	DWG NO.	OSTV7XXA251.DWG			
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance	
Shi Jun 2006.11.11	Shi Jun 2006.11.11	Tason 2006.08.04	Tason 2006.08.04		UNIT: mm	X. ±0.5
					SCALE: 0.2500	X.X ±0.3
					SHEET: 01/01	REV.: B
						X° ±1°