
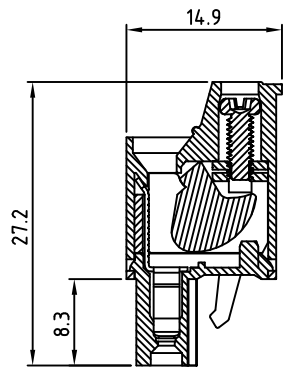
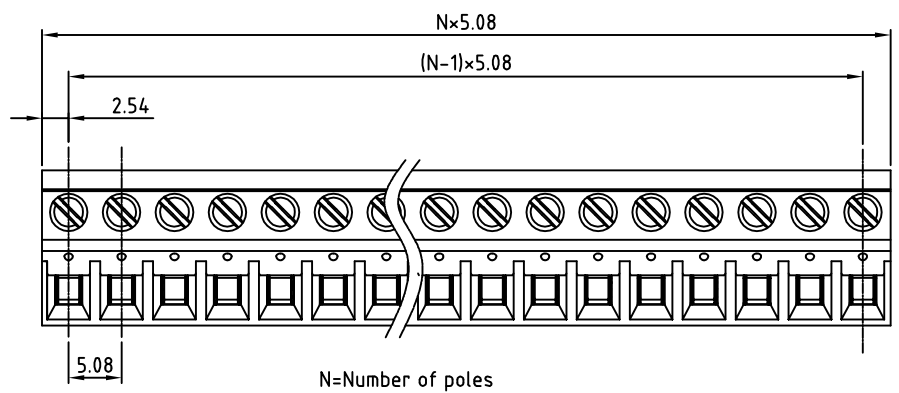


|  |  |  |  |  |          |
|--|--|--|--|--|----------|
|  |  |  |  |  | APPROVER |
|  |  |  |  |  |          |
|  |  |  |  |  |          |
|  |  |  |  |  |          |
|  |  |  |  |  |          |

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

- Material:
- Terminal body
  - (metal housing): Steel Zinc plated
  - Terminal screw: Steel Zinc plated "-" slot type.
  - Wire guard: PhBz (CuSn) Tin plated
  - Insulator(housing): Thermoplastic (UL94V-0)

- Electrical: cULus
- Voltage rating: 300V
  - Current rating: 20A
  - Wire range:
    - Solid wire(AWG): 12-22
    - Stranded wire(AWG): 12-22
  - Torque: 3.5Lb-In
  - Screw: M2.5
  - Wire strip length: 6-7mm
  - Withstanding Voltage: 1.6KV
  - Operating temperature: -30°C to +105°C
  - Safety Approval: 
  - RoHS Compliant




PART NUMBER:

OSTVMXX5551

|              |                     |
|--------------|---------------------|
| No. of Poles | COLOR               |
| 02 2 Poles   | 0: Black            |
| 03 3 Poles   | 5: Green (Standard) |
| ... ..       | 6: Blue             |
| 24 24 Poles  | 8: Gray             |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

|                       |                       |                                      |                    |   |   |
|-----------------------|-----------------------|--------------------------------------|--------------------|---|---|
| TITLE                 |                       | OSTVM 5.08mm Low Profile Type Series |                    |   |   |
| PART NO.              | OSTVMXX5551           | DWG NO.                              | OSTVMXX5551.DWG    |   |   |
| APPROVED              | CHECKED               | DESIGNED                             | DRAWN              | CUST NO.  | Tolerance                                     |
| Shi Jun<br>2006.10.30 | Shi Jun<br>2006.10.30 | Tony<br>2005.11.08                   | Tony<br>2005.05.16 |  | X. ±0.50<br>X.X ±0.30<br>X.XX ±0.10<br>X° ±1° |
|                       |                       |                                      |                    | SHEET: 01/01  | UNIT: mm<br>SCALE: NONE<br>REV.: C            |