

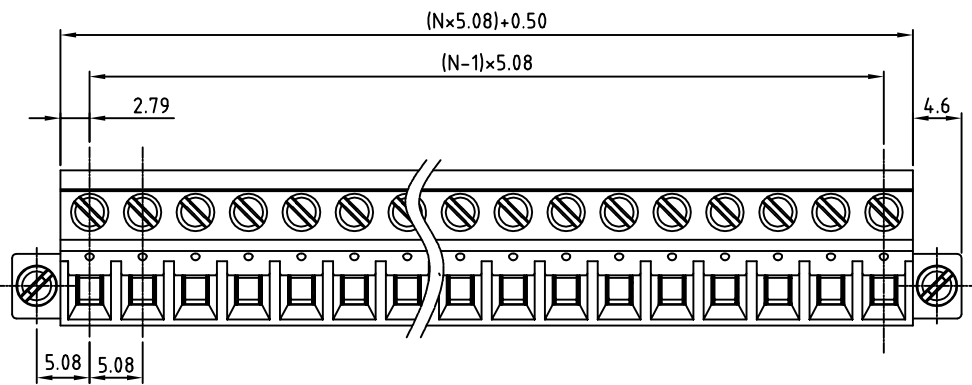


| SIGN | DATE | DESCRIPTION | APPROVER |
|--|------|-------------|----------|
| | | | |
| THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!! | | | |

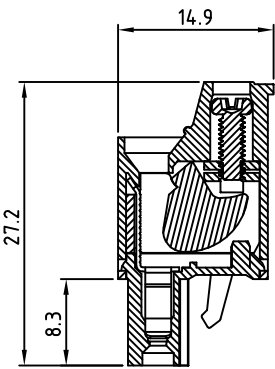

N=Number of poles

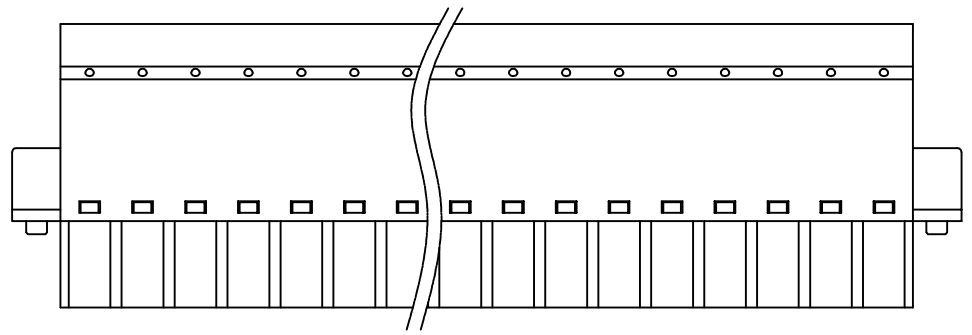

- Material:
- Terminal body
 - (metal housing): Steel Zinc plated
 - Terminal screw: Steel Zinc plated "--"slot type.
 - Wire guard: PhBz (CuSn) Tin plated
 - Insulator(housing): Thermoplastic (UL94V-0)
 - With flange screw: Steel Zinc plated, M2.5

- Electrical: cULus
- Voltage rating: 300V
 - Current rating: 20A
 - Wire range:
 - Solid wire(AWG): 12-22
 - Stranded wire(AWG): 12-22
 - Torque: 3.5Lb-In
 - Screw: M2.5
 - Wire strip length: 6-7mm
 - Withstanding Voltage: 1.6KV
 - Operating temperature: -30°C to +105°C
 - Safety Approval: RoHS Compliant

PART NUMBER:

OSTVMXX5553

| | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Poles | 0: Black |
| 03 3 Poles | 5: Green (Standard) |
| | 6: Blue |
| 24 24 Poles | 8: Grey |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

| | | | | | |
|-----------------------|-----------------------|---|--------------------|----------|---|
| TITLE | | OSTVM 5.08mm Low Profile Type Series W/Flange | | | |
| PART NO. | OSTVMXX5553 | DWG NO. | OSTVMXX5553.DWG | | |
| APPROVED | CHECKED | DESIGNED | DRAWN | CUST NO. | Tolerance |
| Shi Jun 2006.10.30 | Shi Jun 2006.10.30 | Tony 2006.02.07 | Tony 2006.02.07 | | X. ±0.50 X.X ±0.30 X.XX ±0.10 X° ±1° |
| SHEET: 01/01 | | | | UNIT: mm | SCALE: NONE |
| | | | | REV: C | |