

SIGN	DATE	DESCRIPTION	APPROVER
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material

- Insulating body: Thermoplastic (UL94V-0)
- Insulating cover: Thermoplastic (UL94V-0)
- Contact: Brass, Tin plated
- Wire guard: PhBz ,Tin plated
- Terminal screw :Steel Cr3+ Zinc plating "-" slot type

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
Solid wire(AWG): 14-30
Stranded wire(AWG): 14-30
- Torque(Lb-In): 2
- Screw: M2
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec




RoHS Compliant

PART NUMBER:


OSTVRXX5152

- | | |
|--------------|---------------------|
| No. of Poles | COLOR |
| 02 2 Poles | 0: Black |
| 03 3 Poles | 5: Green (Standard) |
| | 6: Blue |
| 24 24 Poles | 8: Grey |

Poles	02	03	04	05	06	07	08	09
Dim L	10.00	15.00	20.00	25.00	30.00	35.00	40.00	45.00
Dim B	5.00	10.00	15.00	20.00	25.00	30.00	35.00	40.00
TOL	±0.15							
Poles	10	11	12	13	14	15	16	17
Dim L	50.00	55.00	60.00	65.00	70.00	75.00	80.00	85.00
Dim B	45.00	50.00	55.00	60.00	65.00	70.00	75.00	80.00
TOL	±0.25							
Poles	18	19	20	21	22	23	24	
Dim L	90.00	95.00	100.0	105.0	110.0	115.0	120.0	
Dim B	85.00	90.00	95.00	100.0	105.0	110.0	115.0	
TOL	±0.35							

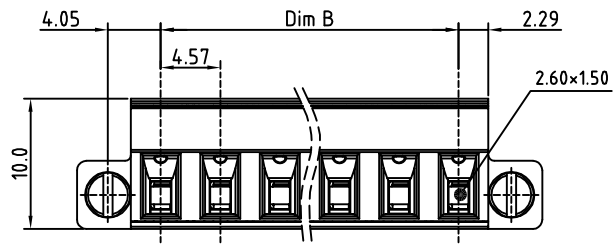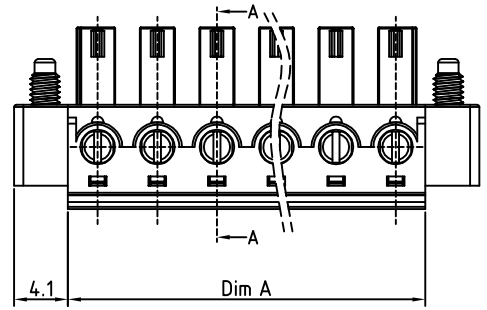

SECTION A-A

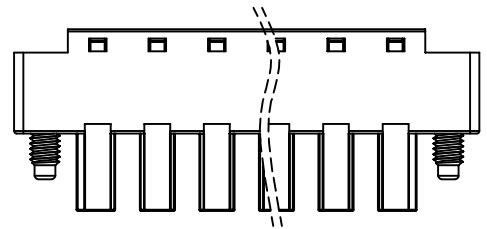

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTVR 5.08 Series w/flange (contact on down side)					
PART NO.		OSTVRXX5152		DWG NO.		OSTVRXX5152.DWG	
APPROVED		CHECKED	DESIGNED	DRAWN	CUST NO.		Tolerance
			Aaron 2007.07.23	Aaron 2007.07.23			X. ±0.50
							X.X ±0.30
							X.XX ±0.10
							X° ±1°
					SHEET: 01/01		REV: A1