
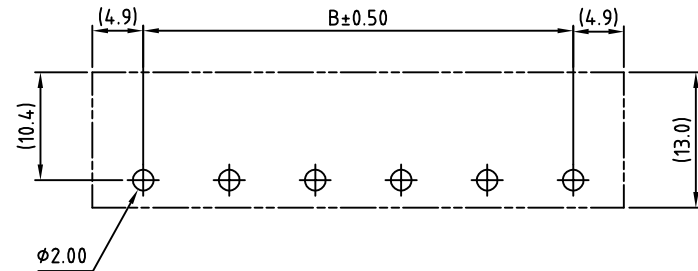
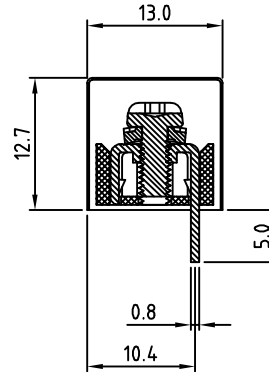
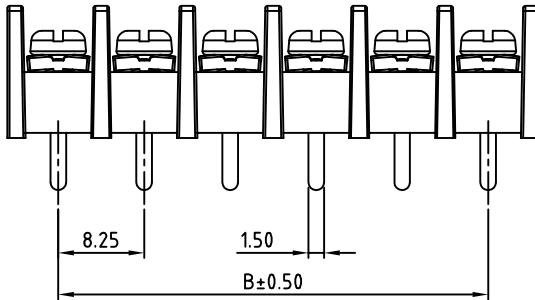


SIGN	DATE	DESCRIPTION	APPROVER
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

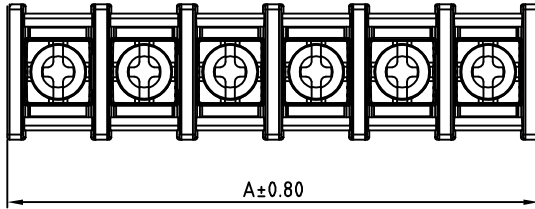

RECOMMENDED PCB LAYOUT

SPECIFICATIONS

- VOLTAGE & CURRENT: 300V, 20A
 WITHSTANDING VOLTAGE: AC 2000 V/Min
 INSULATION RESISTANCE: 1000 MΩ or MORE AT DC 500 V
 TEMPERATURE RANGE: -40 °C ~ +105 °C
 SCREW TORQUE VALUE: 8.8 Lb-in.
 WIRE RANGE: 22 - 12 AWG
 1) MOLDED PARTS: POLYIMIDE 66, UL 94 V-0 BLACK
 2) TERMINAL: BRASS, 0.8t, Tin PLATED
 3) TERMINAL SCREWS: STEEL, Ni PLATED, M3
 APPROVAL: US

RoHS Compliant

PART NUMBER:

OSTYK421XX030

- No. of Poles
 02: 2 Poles
 03: 3 Poles
 04: 4 Poles
 ⋮
 30: 30 Poles

POLE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
A		17.50	25.75	34.00	42.25	50.50	58.75	67.00	75.25	83.50	91.75	100.00	108.25	116.50	124.75	133.00
B		8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50	123.75
POLE	17	18	19	20												
A	141.25	149.50	157.75	166.00												
B	132.00	140.25	148.50	156.75												

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE	OSTYK-421 W/O Flange Series (width of contact is 1.50mm), 8.25mm spacing, low profile					
PART NO.	OSTYK421XX030		DWG NO.	OSTYK421XX030.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
Shi Jun 2006.11.07	Seamus 2006.11.06	Steady 2006.10.20	Steady 2006.10.20		UNIT: mm	Tolerance
				SHEET: 01/01	SCALE: NONE	X.X ±0.50
					REV: C	X.XX ±0.30
						X.XX ±0.10
						X° ±1°