

SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

**SPECIFICATIONS**

VOLTAGE & CURRENT:	300V, 30A
WITHSTANDING VOLTAGE:	AC 2000 V/Min
INSULATION RESISTANCE:	>1000 MΩ@DC 500 V
TEMPERATURE RANGE:	-40 °C ~ +105 °C
SCREW TORQUE VALUE:	8.8 Lb-in.
WIRE RANGE:	22 - 10 (str/sol) AWG
1) MOLDED PARTS:	POLYIMIDE 66, UL 94 V-0 BLACK
2) TERMINAL:	BRASS, 0.8t, Tin PLATED
3) TERMINAL SCREWS:	STEEL, Ni PLATED, M3.5





● Safety Approval:  us

RoHS Compliant

PART NUMBER:

**OSTYK515XX330**


No. of Poles  
 02: 2 Poles  
 03: 3 Poles  
 04: 4 Poles  
 :  
 30: 30 Poles

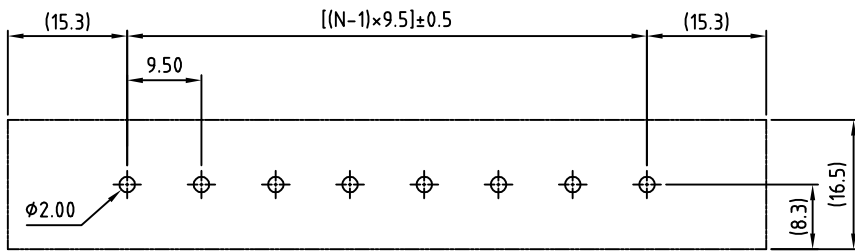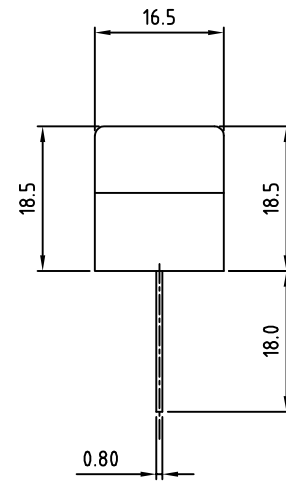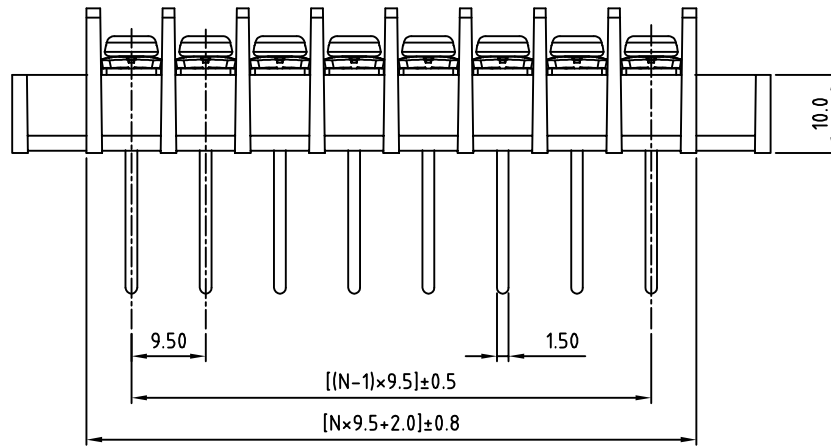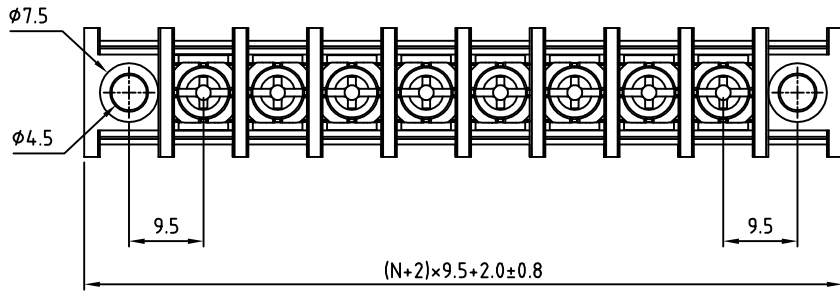

PCB Layout

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTYK-515 W/Flange Series, 9.5mm			
PART NO.	OSTYK515XX330	DWG NO.	OSTYK515XX330.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
Shi Jun 2006.11.07	Seamus 2006.11.06	Tony 2006.02.07	Tony 2006.02.07		
					UNIT: mm
					SCALE: NONE
				SHEET: 01/01	REV: B
					Tolerance
					X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°