

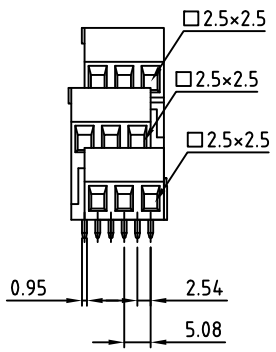


SIGN	DATE	DESCRIPTION	APPROVER


THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!



N=Number of poles

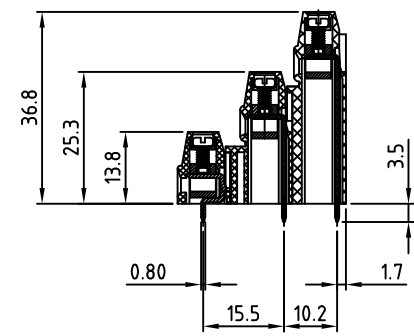

P.C.B LAYOUT

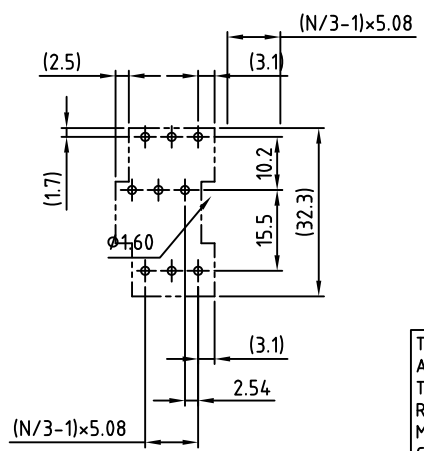

Material

- Terminal body
- (metal housing): Brass(CuZn)
- Terminal screw: Steel Zinc plating "-" slot type
- Contacts: Brass
- Surface of solder tail: Tin plated
- Insulator (housing): Thermoplastic (UL94V-0)

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
  - Solid wire(AWG): 12-24
  - Stranded wire(AWG): 12-24
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec
- Safety Approval: US

RoHS Compliant

PART NUMBER:

OSTYNXX2150

- |                |                     |
|----------------|---------------------|
| No. of Poles   | COLOR               |
| 06: 3x02 Poles | 0: Black            |
| 09: 3x03 Poles | 5: Green (Standard) |
| :              | 6: Blue             |
| 72: 3x24 Poles | 8: Grey             |



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYN 5.08mm Series		DWG NO.		OSTYNXX2150.DWG	
PART NO.		OSTYNXX2150		CUST NO.			
APPROVED	CHECKED	DESIGNED	DRAWN	Tolerance			
Shi Jun	Shi Jun	xionghaitao	xionghaitao	X. ±0.50			
2006.10.20	2006.10.20	2006.10.20	2006.10.20	X.X ±0.30			
				X.XX ±0.10			
				X° ±1°			
				UNIT: mm			
				SCALE: NONE			
				REV: D			
				SHEET: 01/01			