
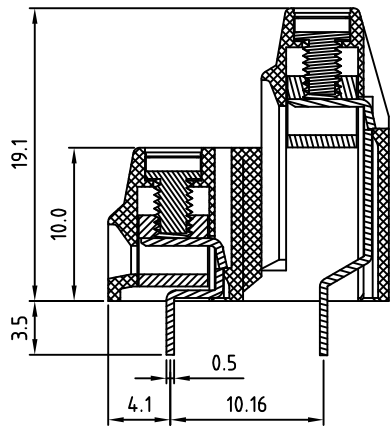


N=Number of poles

**P.C.B. LAYOUT**

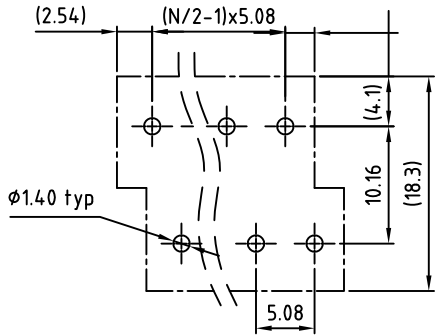

SIGN	DATE	DESCRIPTION	APPROVER
△	2009.01.21	CUL approval added	Lee
<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>			

**Technical Data:**

**Material:**

- Contact(metal housing): Brass (CuZn)
- Terminal screw: Steel zine plating "-"slot type
- Surface of soldertail: Brass with Tin plating
- Insulator (housing): Thermoplastic(UL94V-0)

**Electrical**

- Voltage rating: 300V
- Current rating: 10A
- Torque(Lb-In): 3.5
- Screw: M2.5
- Wire range:
  - Solid Wire(AWG): 16-26
  - Stranded wire(AWG): 16-26
- Wire strip length: 6~7mm
- Withstanding Voltage:1.6kv

**Mechanical:**

- Operating temperature: -30°C to +105°C
- Soldering reliability: 250°C±10°C/5 Sec
- △ ● Safety Approval: US

RoHS Compliant

PART NUMBER:

**OSTYSXX2150**

No. of Poles

- 04: 2x02 Poles
- 06: 2x03 Poles
- : :
- 48 2x24 Poles

COLOR

- 0: Black
- 5: Green (Standard)
- 6: Blue
- 8: Grey



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.

TITLE		OSTYS-5.08 Series			
PART NO.	OSTYSXX2150	DWG NO.	OSTYSXX2150.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
		Jeny 2006.01.11	Jeny 2006.01.11		X. ±0.50
					X.X ±0.30
					X.XX ±0.10
					X° ±1°
				SHEET: 01/01	UNIT: mm
					SCALE: NONE
					REV: D