

SPECIFICATIONS					
PARAMETERS	VALUES	UNITS			
RATED VOLTAGE	12	Vdc			
OPERATING VOLTAGE RANGE	3 ~ 16	Vdc			
RATED CURRENT (MAX)	8	mA			
MINIMUM SPL @ 10 CM	100	dBA			
RESONANT FREQUENCY	$3,700 \pm 500$	Hz			
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec			
OPERATING TEMPERATURE	-20 ~ +60	°C			
STORAGE TEMPERATURE	-30 ~ +70	°C			
HOUSING MATERIAL	ABS	-			
TERMINAL MATERIAL	LEAD WIRE	-			
WEIGHT	5	grams			

THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

0		REVISION HISTORY		
	LTR	DESCRIPTION	DATE	APPROVED
	-	RELEASED FROM ENGINEERING	10/26/2005	
	Α	ADDED SOUND EMISSION HOLE DIAMETER	3/3/2008	R.W.
	B CORRECTED WIRE LENGTH		2/11/2010	B.R.
	C	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	5/2/2010	B.R.
	D	REVISED TOLERANCES ON HOLE TO HOLE & HOLES	8/6/2010	B.R.

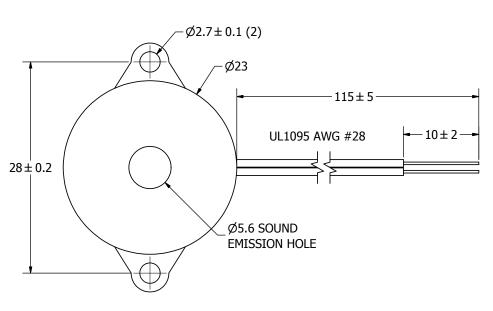

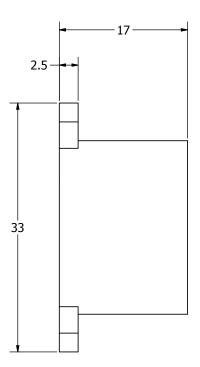



NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		
SPECIFIED:	SIZE	
DIMENSIONS ARE IN	OIZL	
MILLIMETERS,		
TOLERANCES	ΛΊ	
ARE ±0.5 AND	7	
ANGLES ARE ±3°.		
AI-2337-TF-LW115-R.id		

J.A.F.	10/26/2005	Е
	pul.	
	a projects unlimited co	1110

Date

Checked by

Date

Designed by

E.P. 10/26/2005 B.R. 10/26/2005 5/2/2010 AI-2337-TF-LW115-R

Approved by

Date

Drawn Date

4