

SPECIFICATIONS						
PARAMETERS	VALUES	UNITS				
RATED VOLTAGE	12	Vdc				
OPERATING VOLTAGE RANGE	8 ~ 16	Vdc				
RATED CURRENT (MAX)	50	mA				
MINIMUM SPL @ 10 CM	89	dBA				
RESONANT FREQUENCY	400 ± 100	Hz				
TONE OR PULSE RATE	CONTINUOUS	0 pulse /sec				
OPERATING TEMPERATURE	-20 ~ +60	°C				
STORAGE TEMPERATURE	-30 ~ +70	°C				
HOUSING MATERIAL	ABS	-				
TERMINAL MATERIAL	LEAD WIRES	-				
WEIGHT	11	grams				

THIS DOCUMENT CONTAINS DATA
PROPRIETARY TO PROJECTS UNLIMITED, INC.
ANY USE OR REPRODUCTION, IN ANY FORM,
WITHOUT PRIOR WRITTEN PERMISSION OF
PROJECTS UNLIMITED, INC. IS PROHIBITED.
©2003, Projects Unlimited Inc.

_		REVISION HISTORY		
_		REVISION HISTORY		
C. I.	LTR	DESCRIPTION	DATE	APPROVED
=	-	RELEASED FROM ENGINEERING	5/22/2006	
·	Α	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	2/04/2008	B.R.

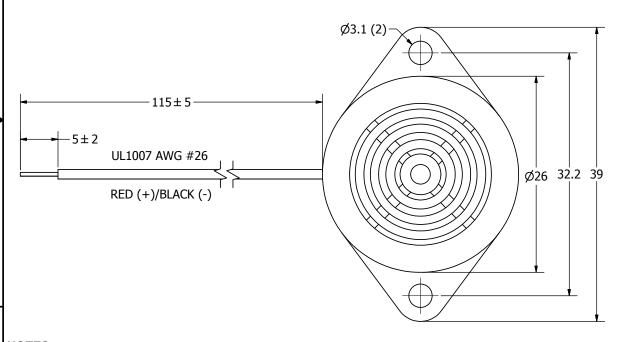

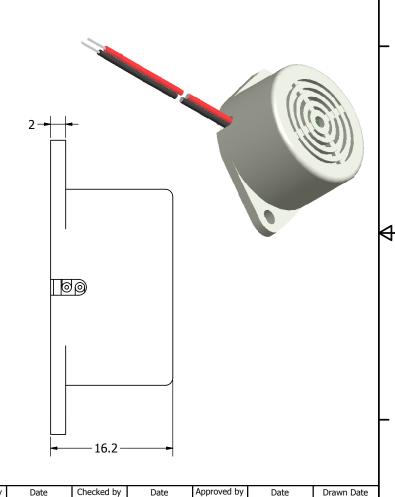

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

UNLESS OTHERWISE SPECIFIED:		Designed by
DIMENSIONS ARE IN	SIZE	J.D.
MILLIMETERS,		$\infty$
TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3	XXX
AL 2604 TE L W/1	15 12\/ D idw	

J.D.	5/25/2006	
	pui audic	) <sup>™</sup> Inc
	a projecte unlimited co	

E.P. 5/25/2006 B.R. 5/25/2006 2/4/2008 AI-2604-TF-LW115-12V-R

卆