

SPECIFICATIONS			
PARAMETERS	VALUES	UNIT	
RATED VOLTAGE	3	Vp-p	
OPERATING VOLTAGE RANGE	GE RANGE 1 ~ 25 Vp-p		
RATED CURRENT (MAX)	X) 1 m		
CAPACITANCE	NCE 19,000 ± 30% pF		
MINIMUM SPL @ 10 CM	10 CM 70 dBA		
RESONANT FREQUENCY	2,000 ± 500 H		
OPERATING TEMPERATURE	-40 ~ +125 °C		
STORAGE TEMPERATURE	-40 ~ +125 °C		
HOUSING MATERIAL	PBT	-	
TERMINIAL MATERIAL	Sn PLATED		
TERMINAL MATERIAL	PHOSHOR BRONZE	_	
WEIGHT	3	grams	


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED

DUCTION, IN ANY FORM, WITHOUT PRIOR	L
EN PERMISSION OF PROJECTS UNLIMITED,	ı
INC. IS PROHIBITED.	H
©2003, Projects Unlimited Inc.	ı

	REVISION HISTORY		
LTR	DESCRIPTION	DATE	APPROVED
-	RELEASED FROM ENGINEERING	11/02/2004	
Α	REMOVED LEAD FREE ADDED ROHS NOTE	8/10/2005	
В	REVISED TO INVENTOR 3-D DRAWING TEMPLATE	8/12/2008	B.R.

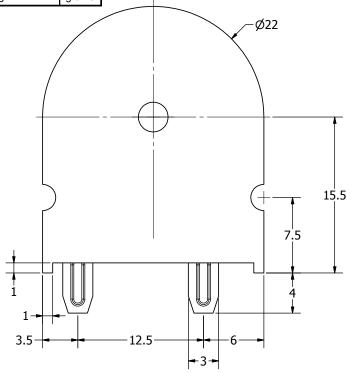

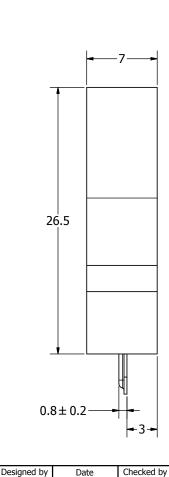

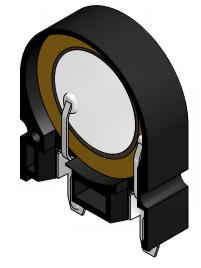

## NOTES:

- 1. ALL DIMENSIONS ARE IN MILLIMETERS.
- 2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
- 3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

	UNLESS OTHERWISE SPECIFIED:		
	DIMENSIONS ARE IN	SIZE	
	MILLIMETERS,		
	TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°.	A3	
AT-2720-ST-R.idw		ST-R.idw	

R.A.C.	11/2/2004	
	Pul audic A Division of Projects Unlin	<b>-</b>

AT-2720-ST-R					
	R.W.	11/2/2004	8/12/2008		
Date	Approved by	Date	Diawii Date		

Transducer (Piezo) 1/1