



M2125

LINEAR INTEGRATED CIRCUIT


SINGLE-SUPPLY OPERATIONAL AMPLIFIER

DESCRIPTION

The UTC M2125 is a single-supply operational amplifier.

FEATURES

- * Single-Supply Operation
- * Low Operating Voltage: $\pm 2.7V \sim 20V$
- * Low Operating Current: 1.0mA (typ.)
- * Slew Rate: 1.2V/ μs (typ.)

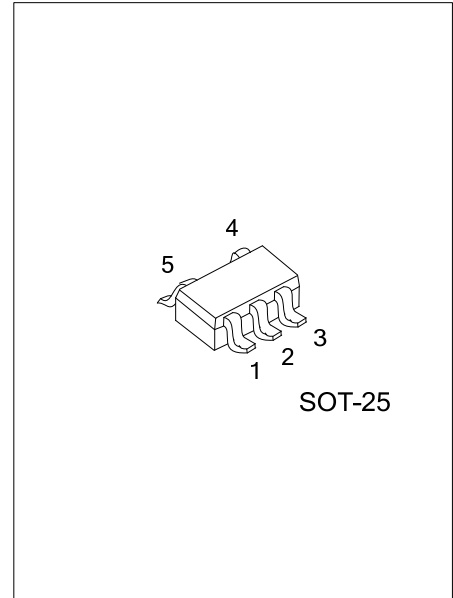


ORDERING INFORMATION

Ordering Number		Package	Pin Assignment					Packing
Lead Free	Halogen Free		1	2	3	4	5	
M2125L-AF5-R	M2125G-AF5-R	SOT-25	I ⁺	G	I ⁻	O	V ⁺	Tape Reel


Note: Pin Assignment: I: V_{IN} O: Output G: GND

<p>M2125L-AF5-R</p> <p>(1) Packing Type (2) Package Type (3) Lead Free</p>	<p>(1) R: Tape Reel (2) AF5: SOT-25 (3) G: Halogen Free, L: Lead Free</p>
--	---


MARKING

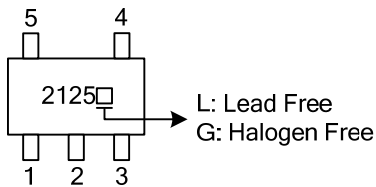

■ PIN CONFIGURATION



■ EQUIVALENT CIRCUIT

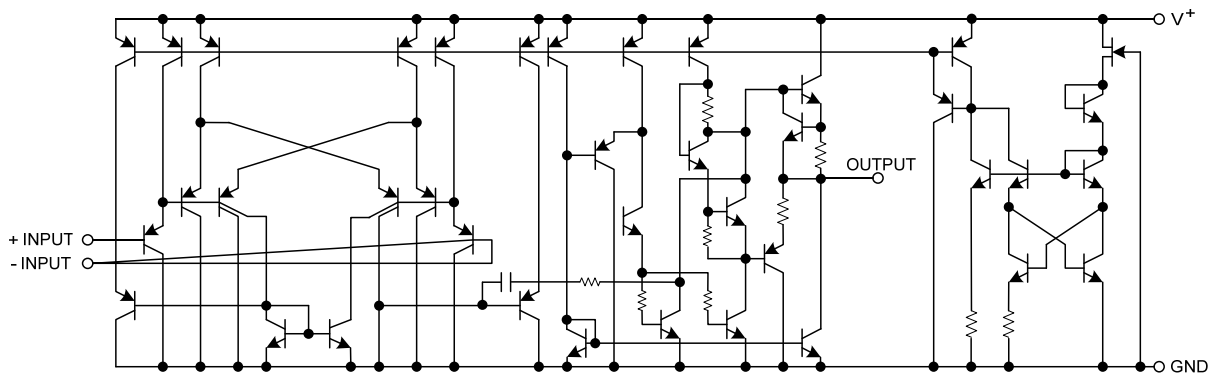

■ **ABSOLUTE MAXIMUM RATINGS** ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	+20	V
Differential Input Voltage	$V_{I(\text{DIFF})}$	+20	V
Input Voltage (Note 2)	V_{IN}	-0.3 ~ +20	V
Power Dissipation	P_D	200	mW
Junction Temperature	T_J	+125	$^{\circ}\text{C}$
Operating Temperature	T_{OPR}	-40~ +85	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-40~+125	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.







Absolute maximum ratings are stress ratings only and functional device operation is not implied.

2. When the supply voltage is less than +20V, the absolute maximum input voltage is equal to the supply voltage.





■ **ELECTRICAL CHARACTERISTICS** ($V^+=5\text{V}$, $T_A=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Input Offset Voltage	$V_{I(\text{OFF})}$	$R_S=0\Omega$		2	7	mV
Input Offset Current	$I_{I(\text{OFF})}$			5	50	nA
Input Bias Current	$I_{I(\text{BIAS})}$			25	250	nA
Large Signal Voltage Gain	G_V	$R_L \geq 2\text{k}\Omega$	88	100		dB
Maximum Output Voltage Swings	V_{OM}	$R_L=2\text{k}\Omega$	3.5			V
Input Common Mode Voltage	$V_{I(\text{CM})}$		0		3.5	V
Common Mode Rejection Ratio	RR		70	90		dB
Supply Voltage Rejection Ratio	SVR		80	94		dB
Output Source Current	I_{SOURCE}	$V_{\text{IN}^+}=1\text{V}, V_{\text{IN}^-}=0\text{V}$	20	30		mA
Output Sink Current	I_{SINK}	$V_{\text{IN}^+}=0\text{V}, V_{\text{IN}^-}=1\text{V}$	8	20		mA
Operating Current	I_{CC}	$R_L=\infty$		1.0	1.75	mA
Slew Rate	SR			1.2		V/ μs
Unity Gain Frequency	f_T			1.2		MHz

TYPICAL CHARACTERISTICS

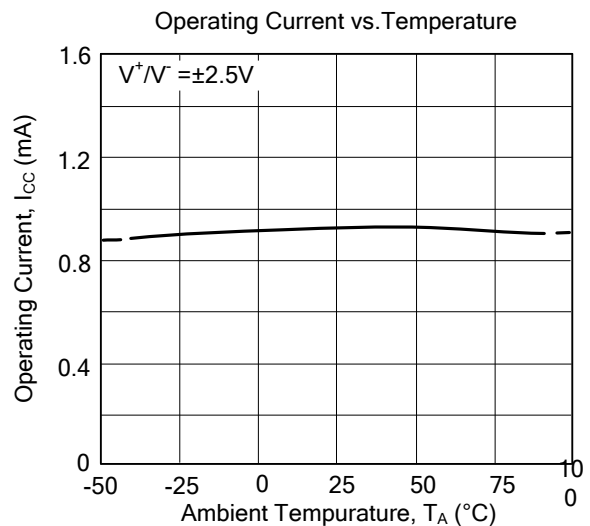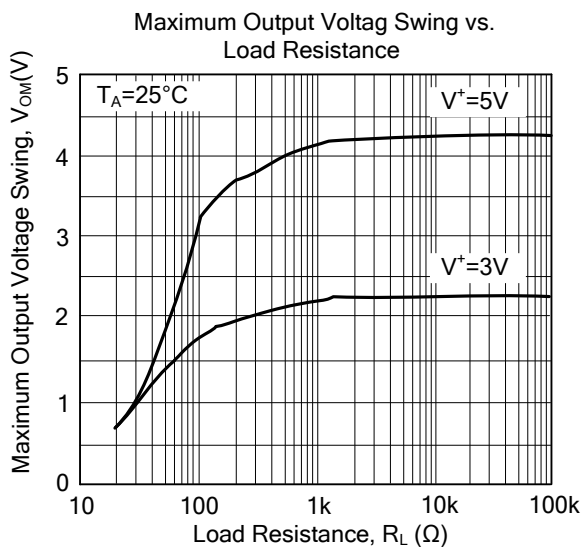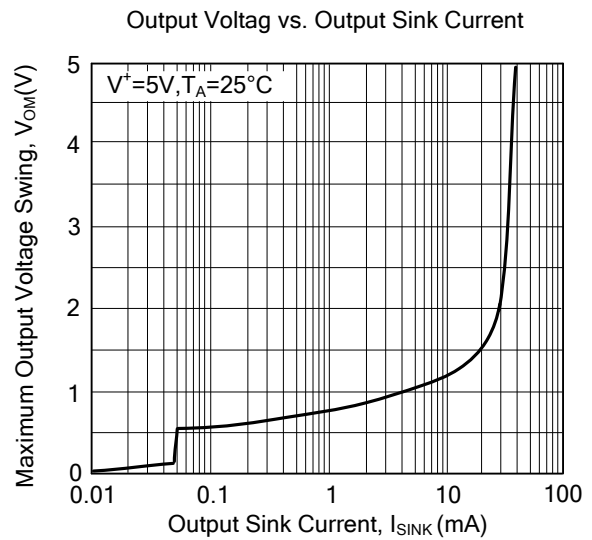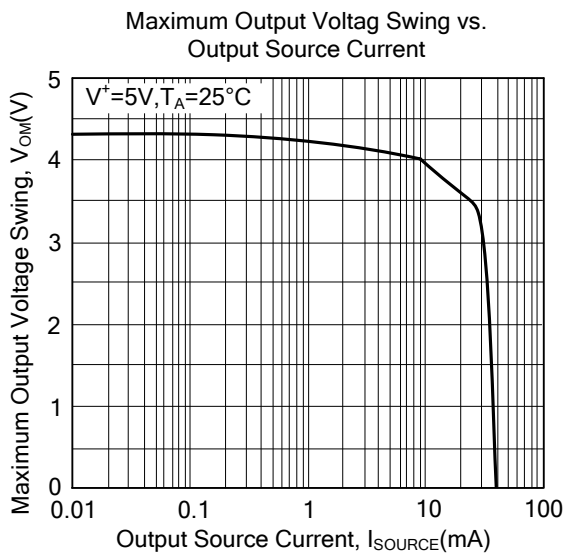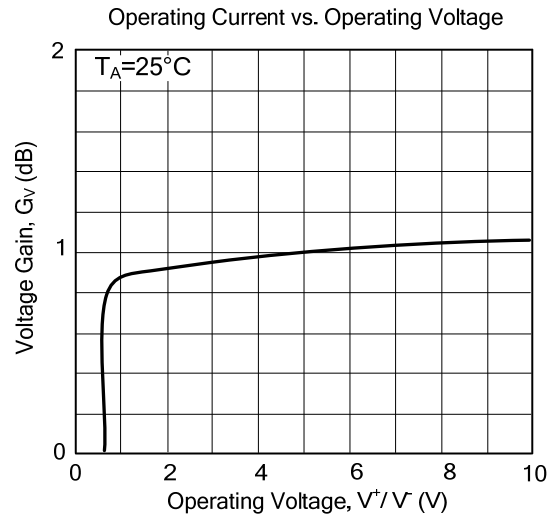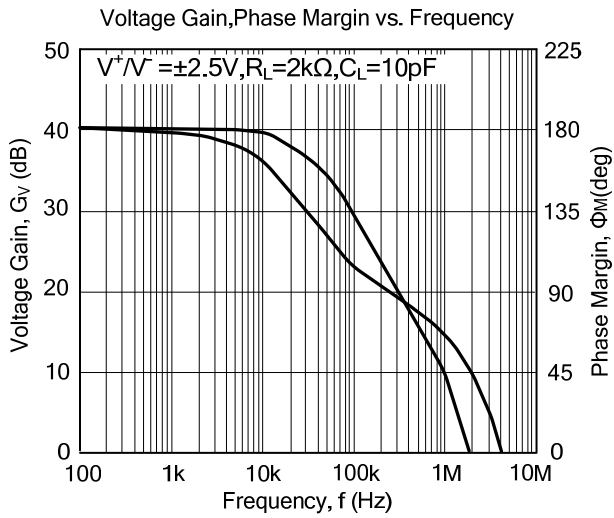

■ TYPICAL CHARSACTERISTICS(Cont.)

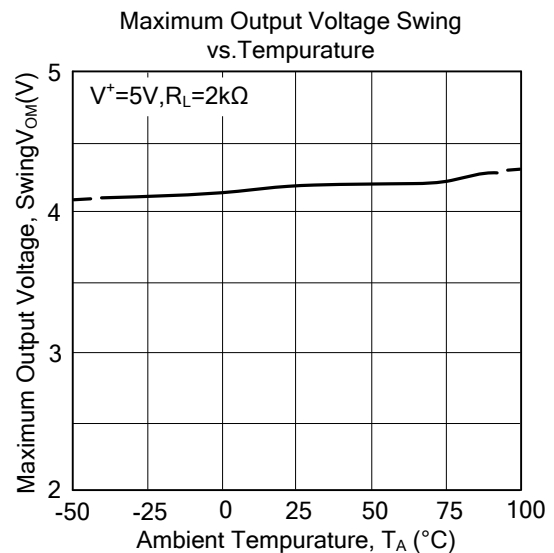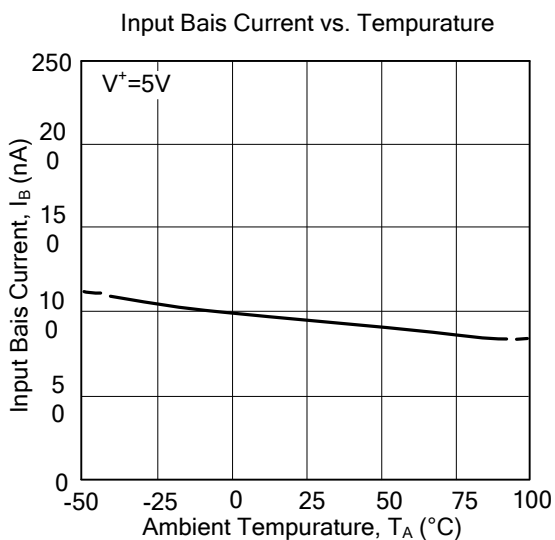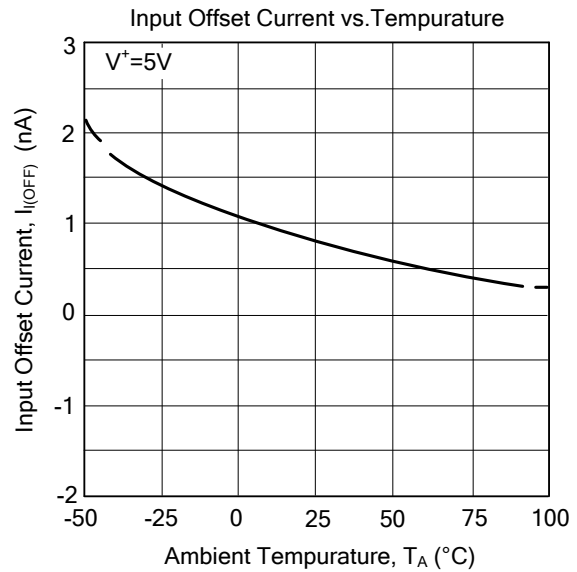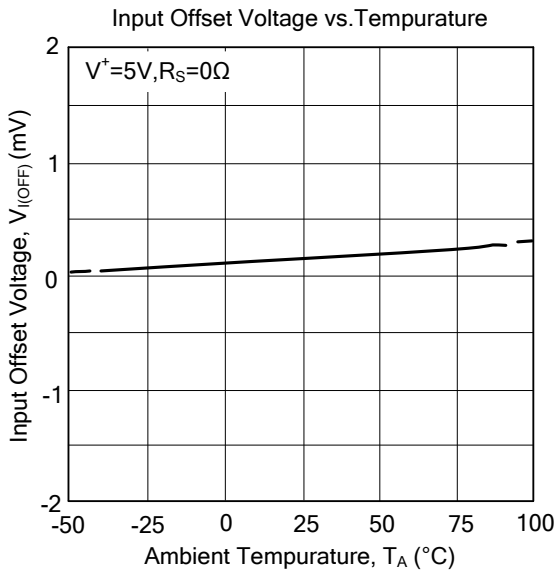

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.