


## SPECIFICATION

|              |                                                                                                                        |
|--------------|------------------------------------------------------------------------------------------------------------------------|
| Part No.     | : <b>HLA.01</b>                                                                                                        |
| Product Name | : 5150-5900 MHz Ceramic Loop antenna<br>WLAN/ Wi-Fi/ HDMI                                                              |
| Feature      | : 3.2mm *1.6mm * 0.5mm<br>Low profile<br>Peak gain 2.1dBi<br>65%+ Efficiency Typical<br>Compact Size<br>RoHS Compliant |



HLAD.01 EVB Board

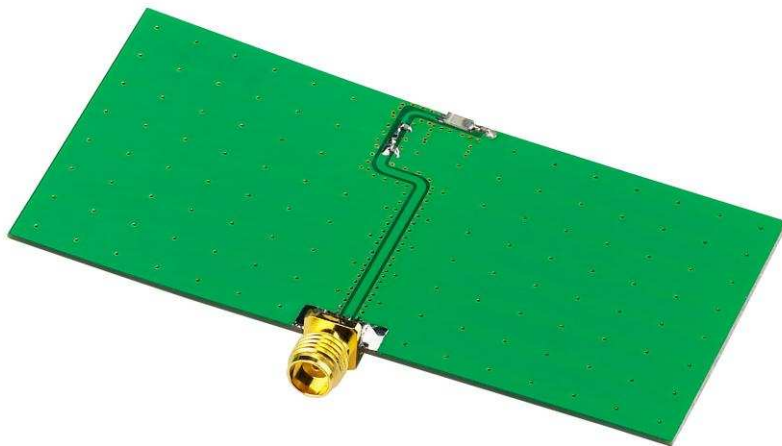

Bottom



Top

## 1. Introduction

The HLA.01 5150-5900 MHz ceramic chip antenna is specifically designed for Wi-Fi/ WHDMI applications where high data throughput is needed. It is a high efficiency miniature SMD edge mounted ceramic antenna with minimum footprint requirement. This ceramic chip antenna uses the main PCB as its ground plane, thereby increasing antenna efficiency. It is tuned for different PCB sizes by simply changing the value of the matching circuit. The HLA.01 with dimension of 3.2mm \*1.6mm \* 0.5mm, is one of the smallest antennas available worldwide. This antenna is delivered on tape and reel.

## Applications

IEEE802.11a (5150-5900 MHz)

WHDMI PCMCIA cards or Wireless USB dongles


## 2. Specification Table

| Electrical                                    |                            |
|-----------------------------------------------|----------------------------|
| Center Frequency (MHz)                        | 5500                       |
| Bandwidth (MHz)                               | 524                        |
| Peak Gain (dBi)                               | 2.1 (typical)              |
| Efficiency (%)                                | 65 (typical)               |
| VSWR                                          | 2 max.                     |
| Impedance ( $\Omega$ )                        | 50                         |
| Polarization                                  | Linear                     |
| Radiation Pattern                             | Omni                       |
| Input Power(W)                                | 50                         |
| MECHANICAL                                    |                            |
| Dimensions (mm)                               | 3.2 x 1.6 x 0.5            |
| Ground plane (mm)                             | 80x40                      |
| Material                                      | AS 6                       |
| ENVIRONMENTAL                                 |                            |
| Temperature Range                             | -40°C to 85°C              |
| Temperature Coefficient of Frequency (ppm/°C) | 0±20 max. (@-40°C to 85°C) |
| Humidity                                      | Non-condensing 65°C 95% RH |


### 3. Return Loss



## 4. Smith Chart

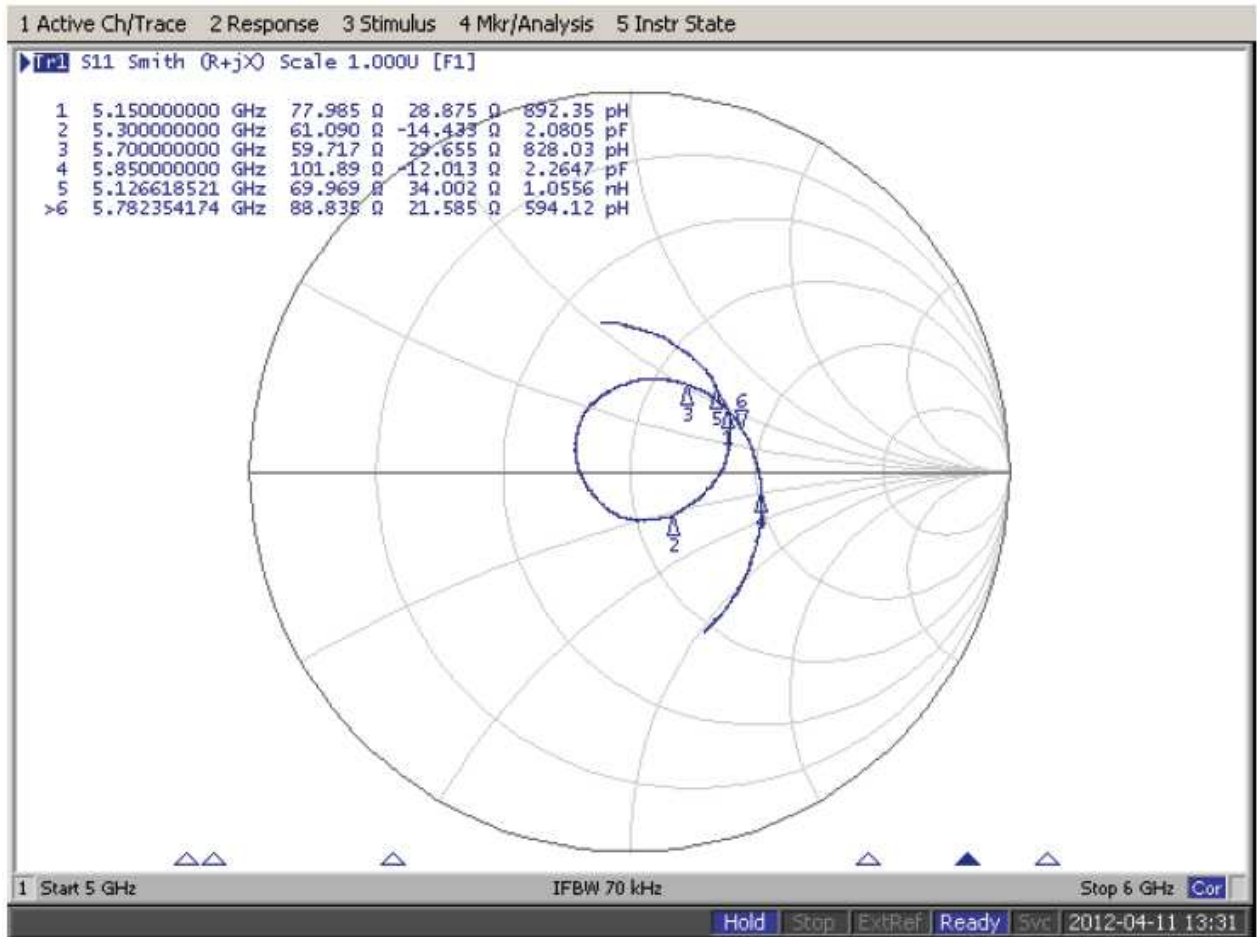


## 5. Efficiency

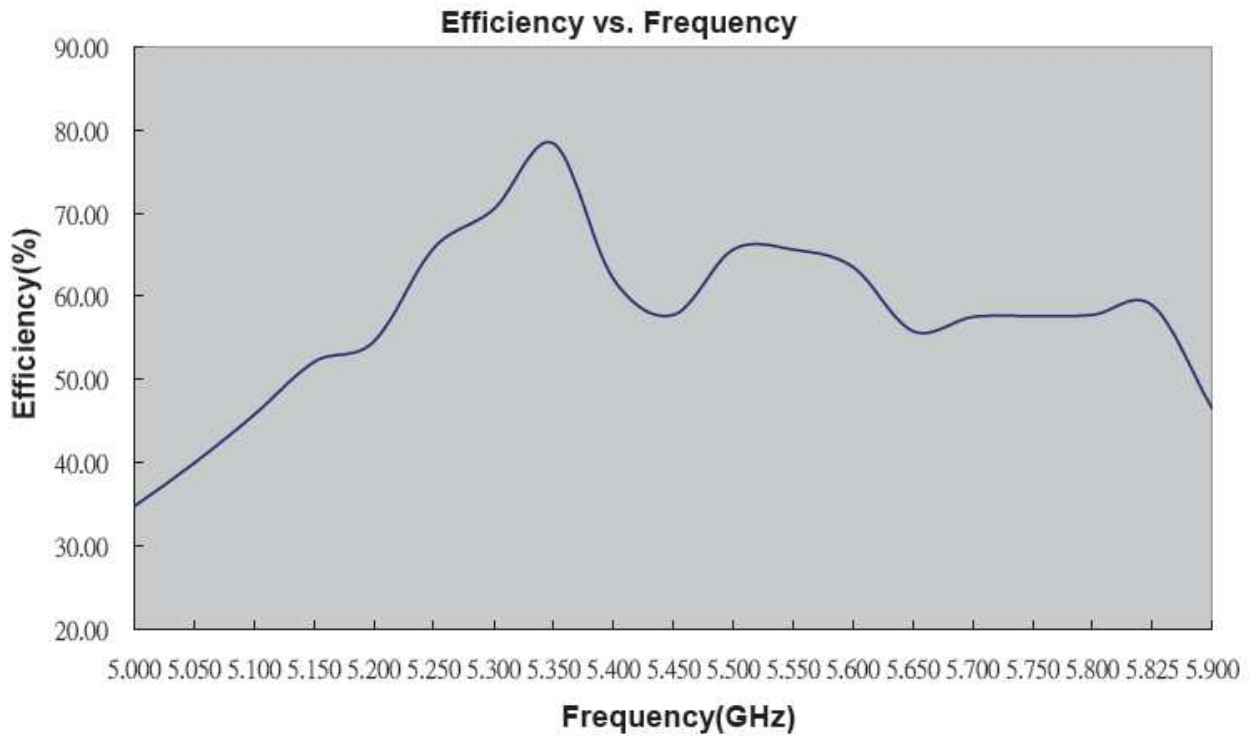


| Frequency(GHz) | 5.000 | 5.050 | 5.100 | 5.150 | 5.200 | 5.250 | 5.300 | 5.350 | 5.400 | 5.450 |
|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Efficiency(dB) | -4.58 | -3.98 | -3.39 | -2.83 | -2.63 | -1.82 | -1.52 | -1.06 | -2.07 | -2.38 |
| Efficiency(%)  | 34.83 | 39.99 | 45.81 | 52.12 | 54.58 | 65.77 | 70.47 | 78.34 | 62.09 | 57.81 |
| Gain(dBi)      | -0.23 | 0.00  | 0.54  | 0.83  | 1.23  | 2.06  | 1.95  | 2.46  | 1.82  | 1.14  |



| Frequency(GHz) | 5.500 | 5.550 | 5.600 | 5.650 | 5.700 | 5.750 | 5.800 | 5.825 | 5.900 |
|----------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Efficiency(dB) | -1.83 | -1.83 | -1.97 | -2.53 | -2.40 | -2.39 | -2.38 | -2.30 | -3.32 |
| Efficiency(%)  | 65.61 | 65.61 | 63.53 | 55.85 | 57.54 | 57.68 | 57.81 | 58.88 | 46.56 |
| Gain(dBi)      | 2.12  | 1.73  | 1.70  | 1.28  | 1.75  | 1.85  | 1.87  | 1.63  | 0.60  |

## 6. Antenna Radiation Patterns

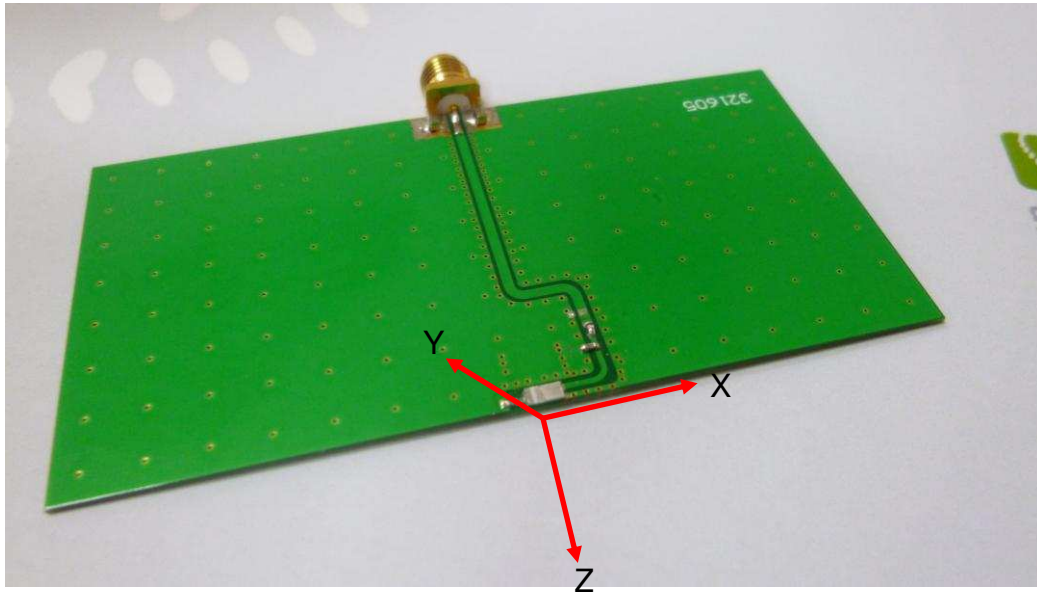



### 6.1 3D Gain pattern @ 5150 MHz

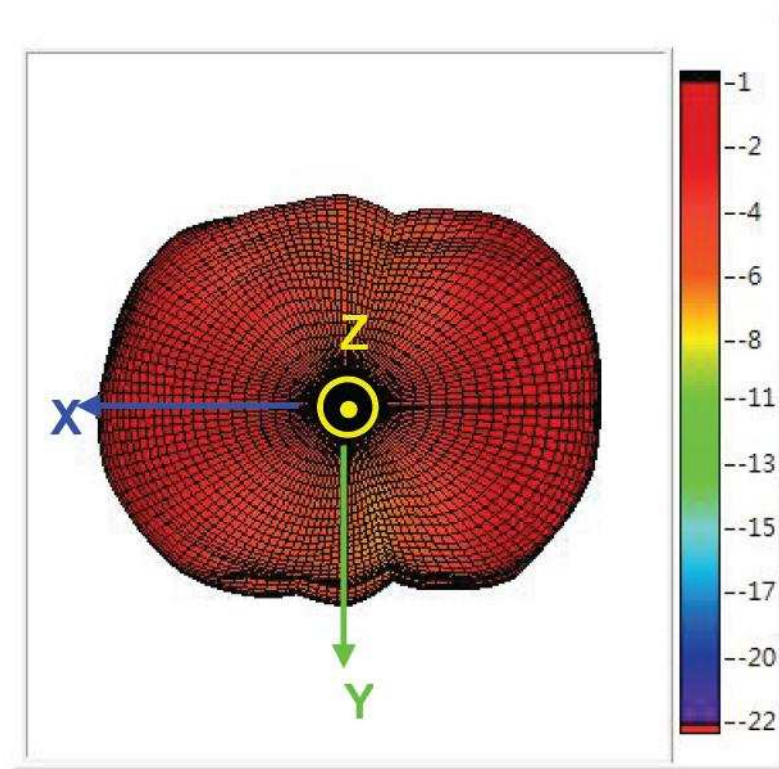


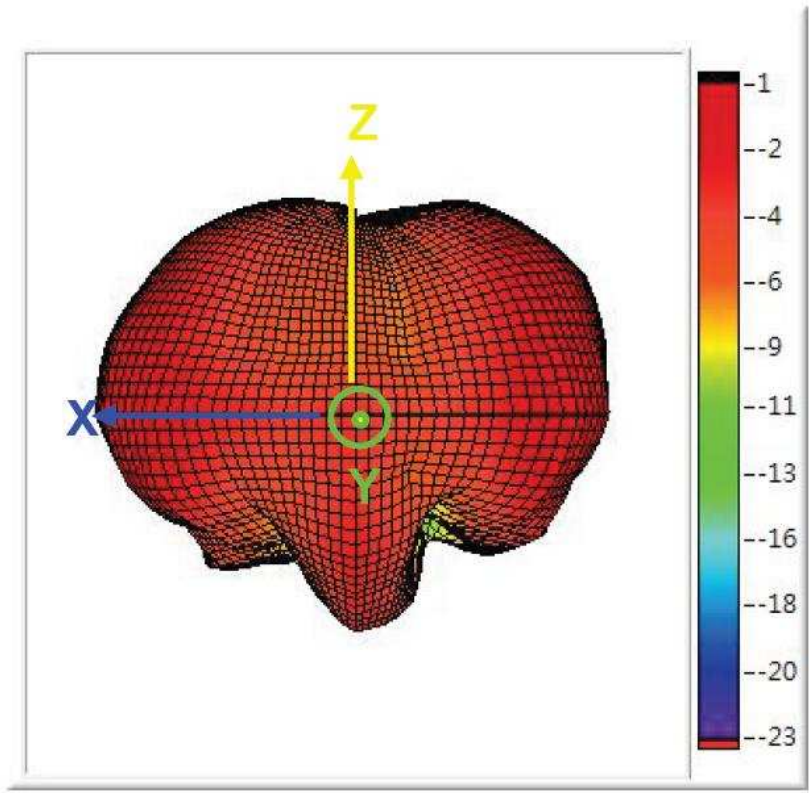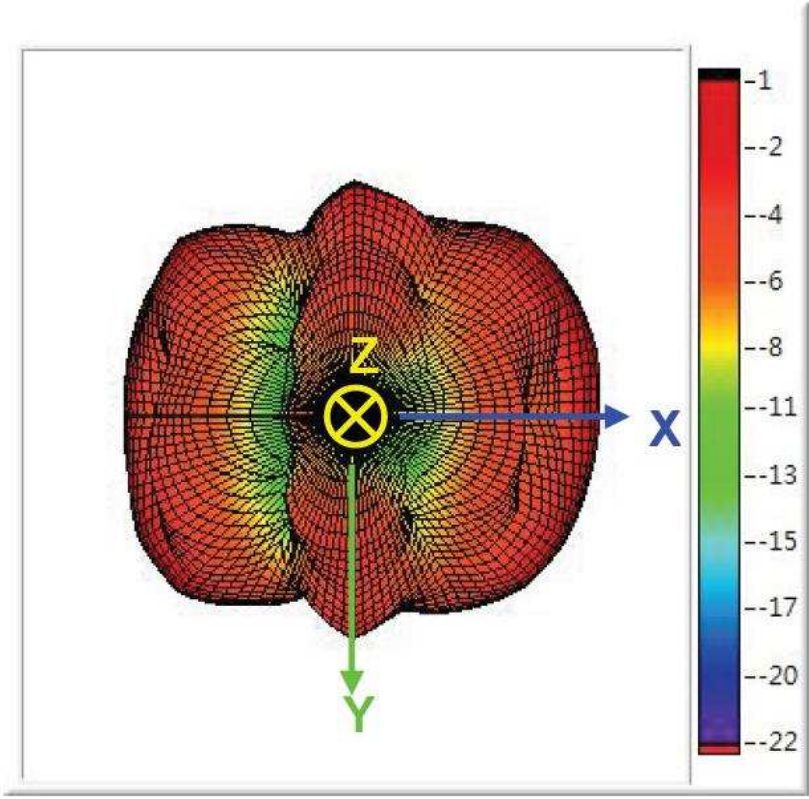






### 6.2 3D Gain pattern @ 5350 MHz

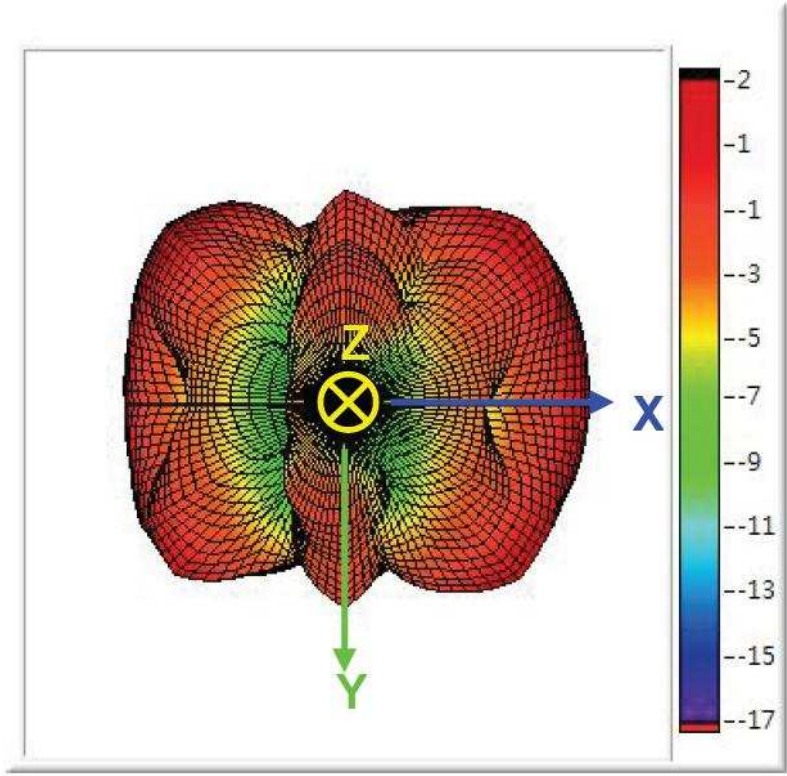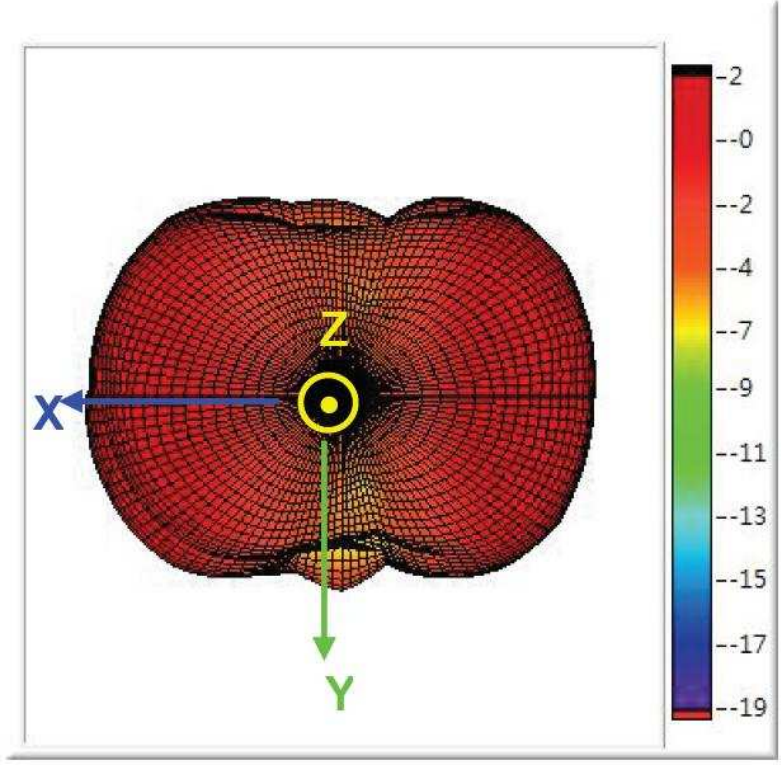

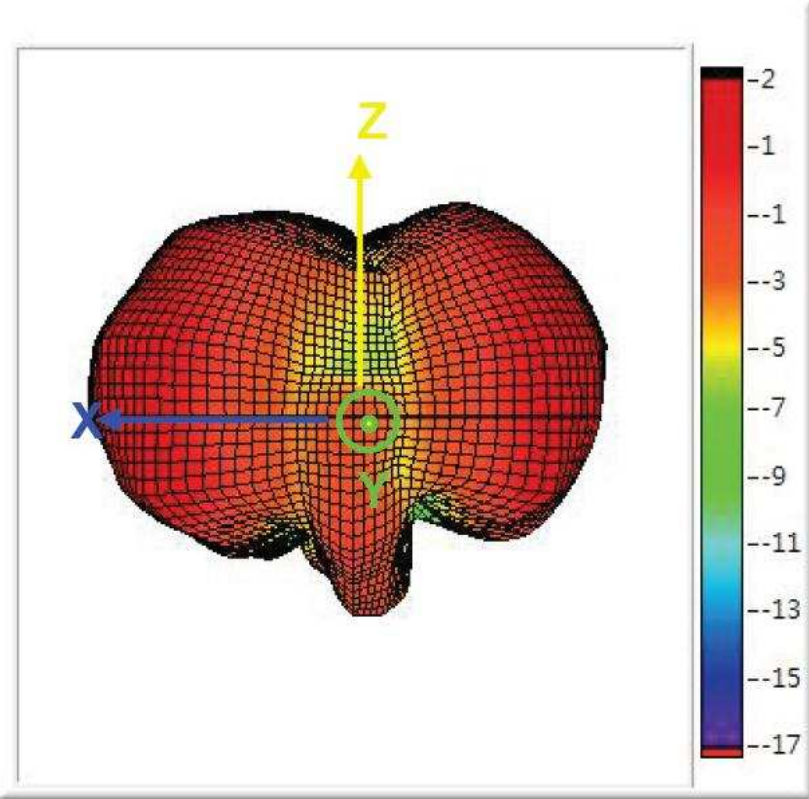



**6.3 3D Gain pattern @ 5700 MHz**

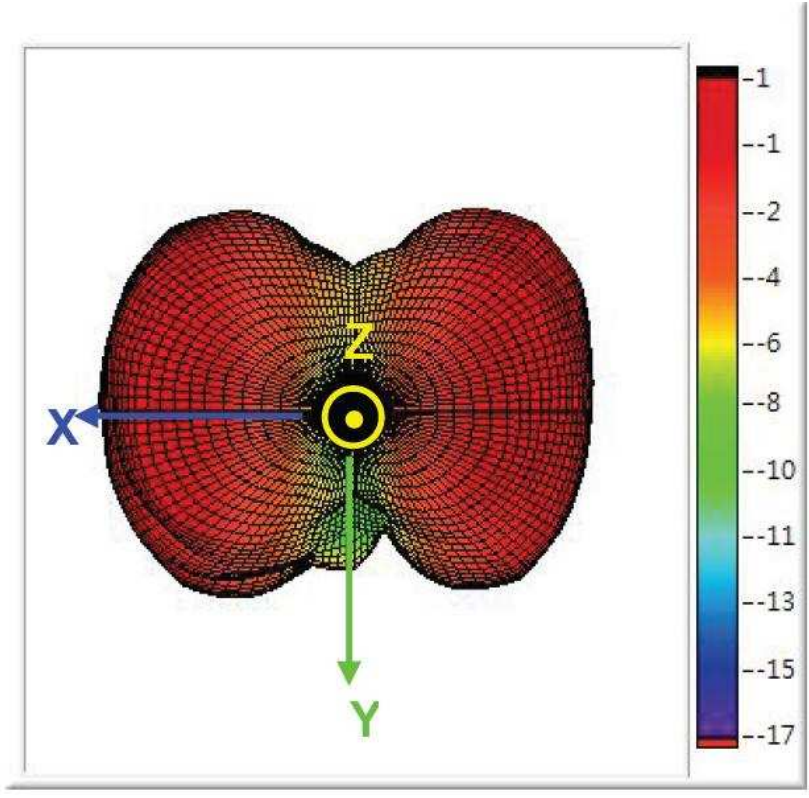

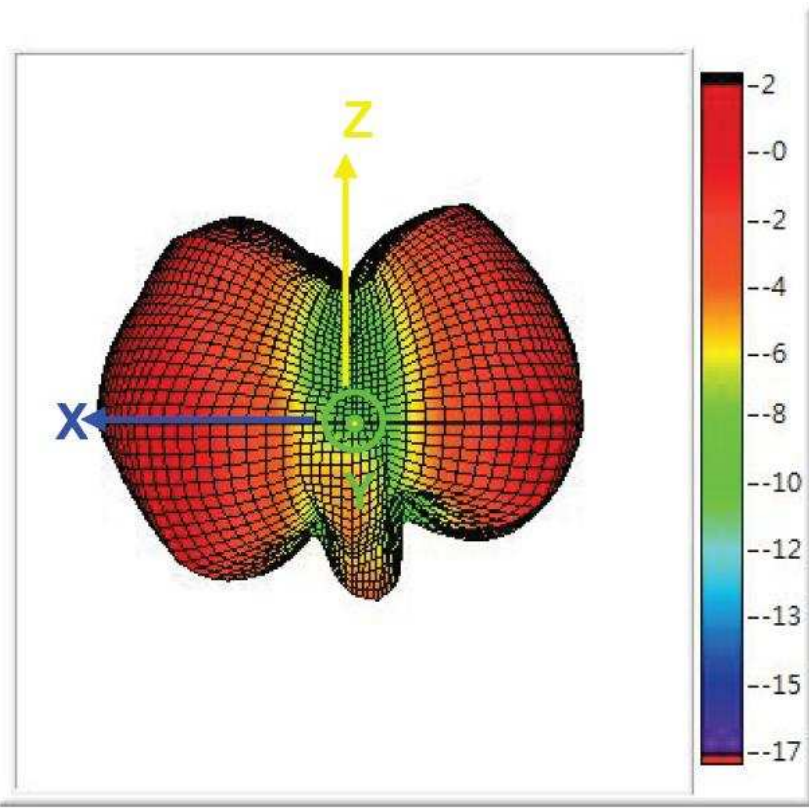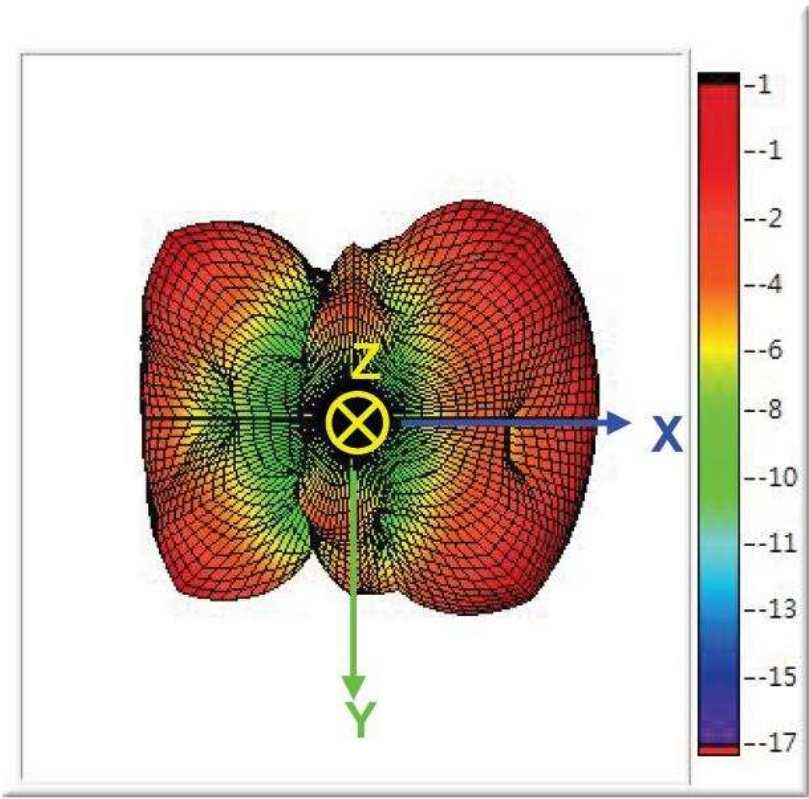


### 6.4 3D Gain pattern @ 5850 MHz

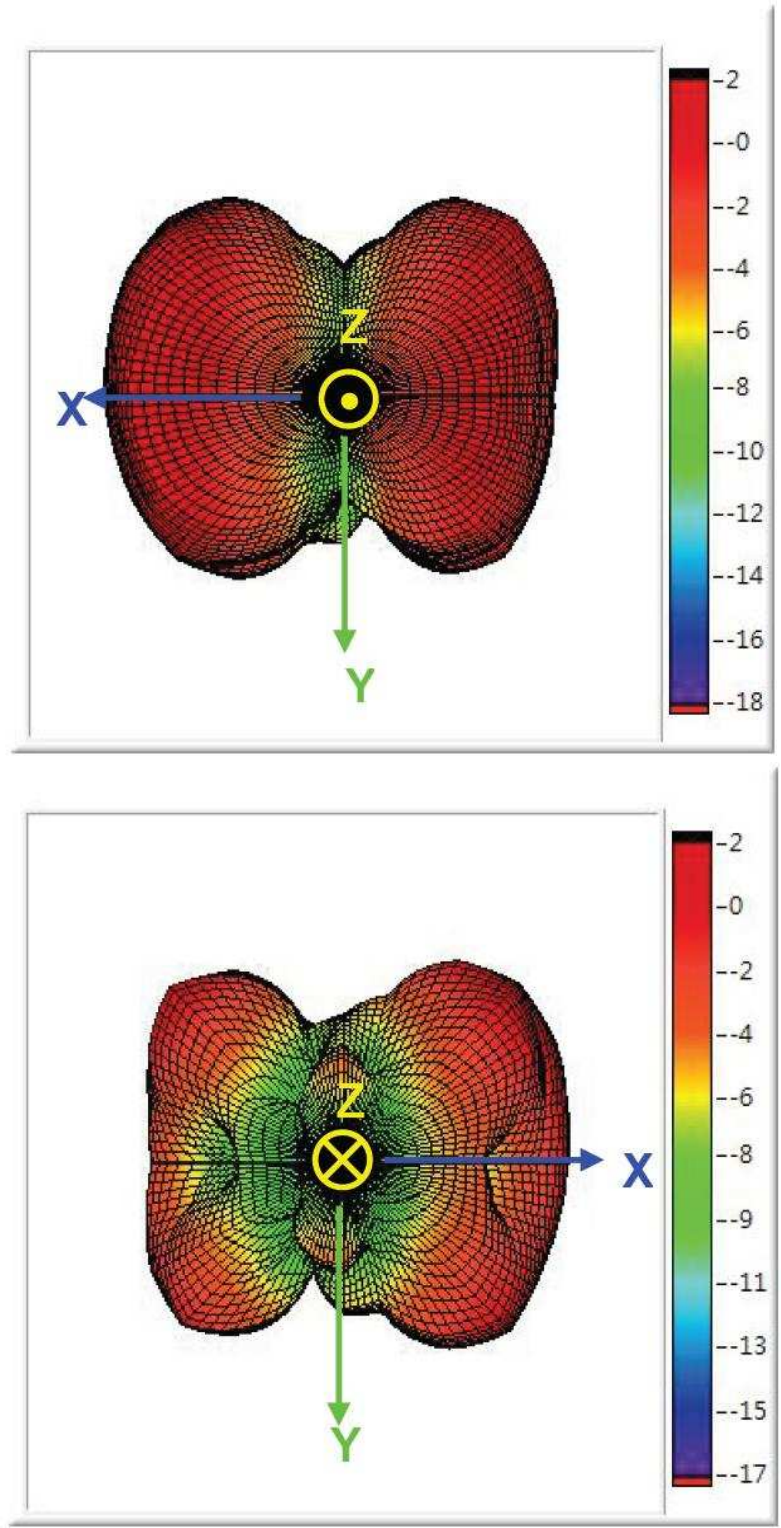


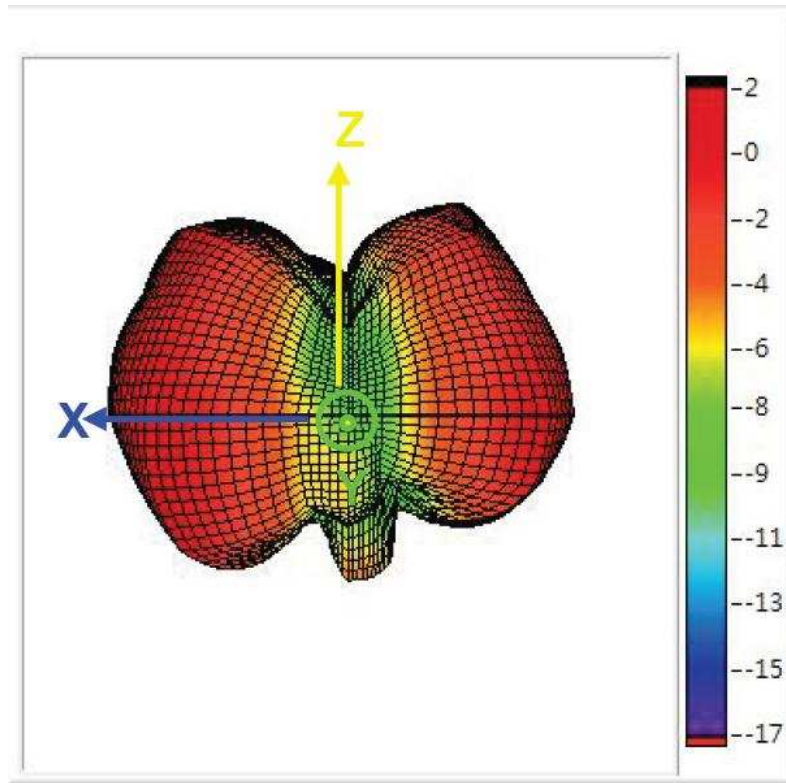



## 7. Mechanical Drawing

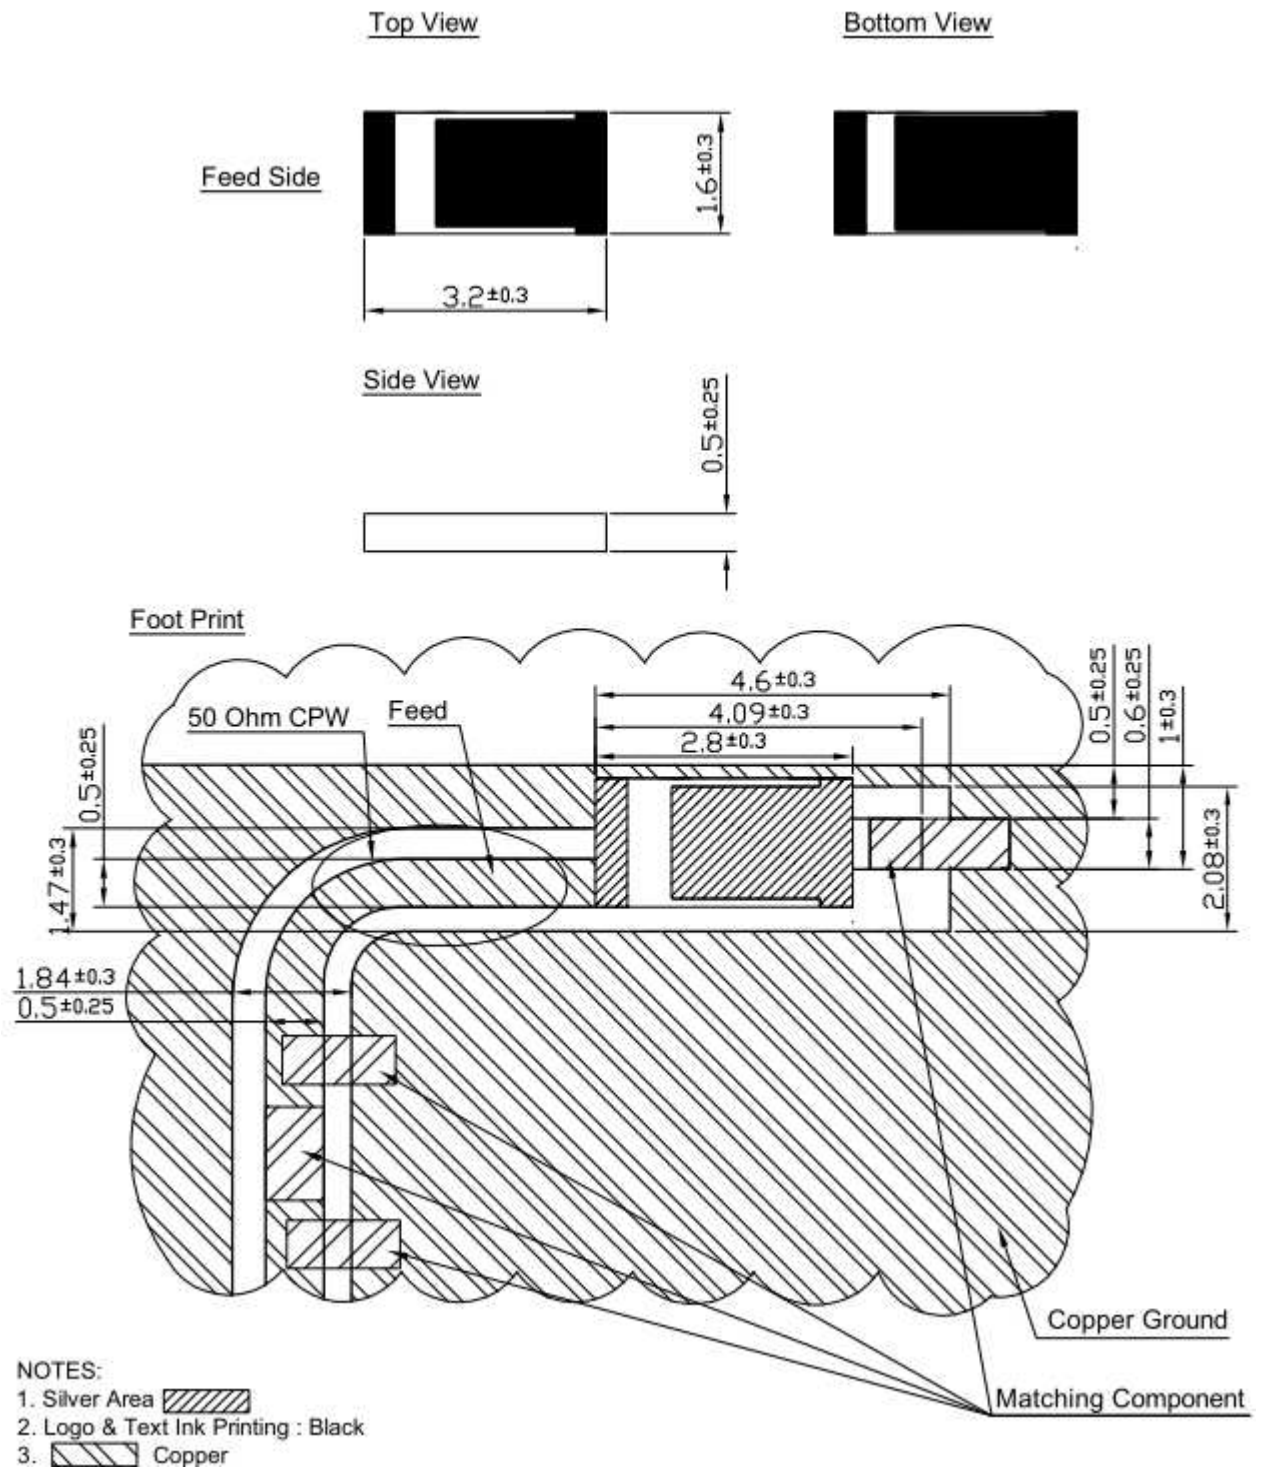


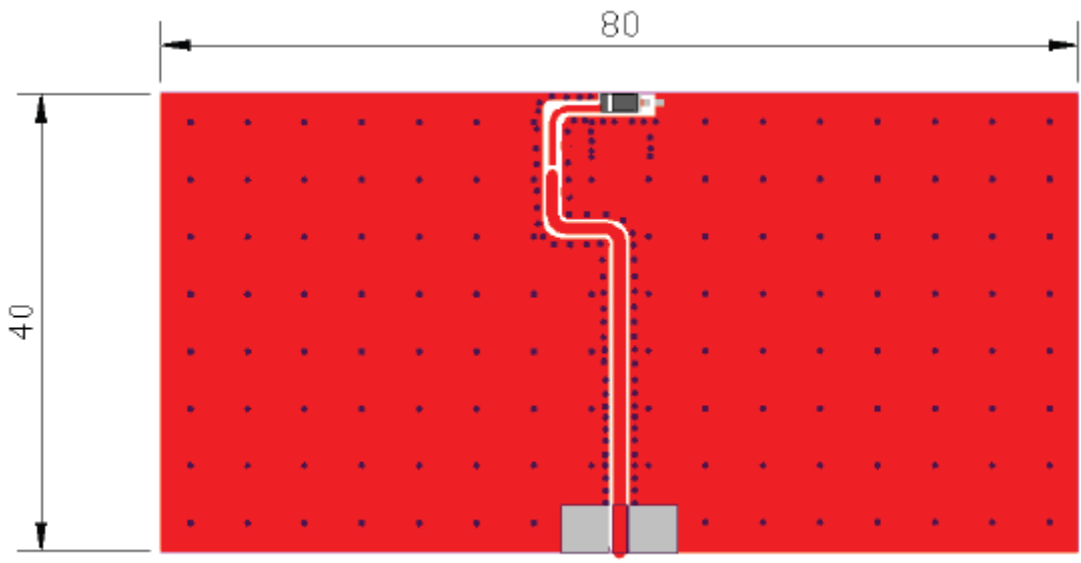

Unit : mm

## 8. Layout Guide


Solder Land Pattern:

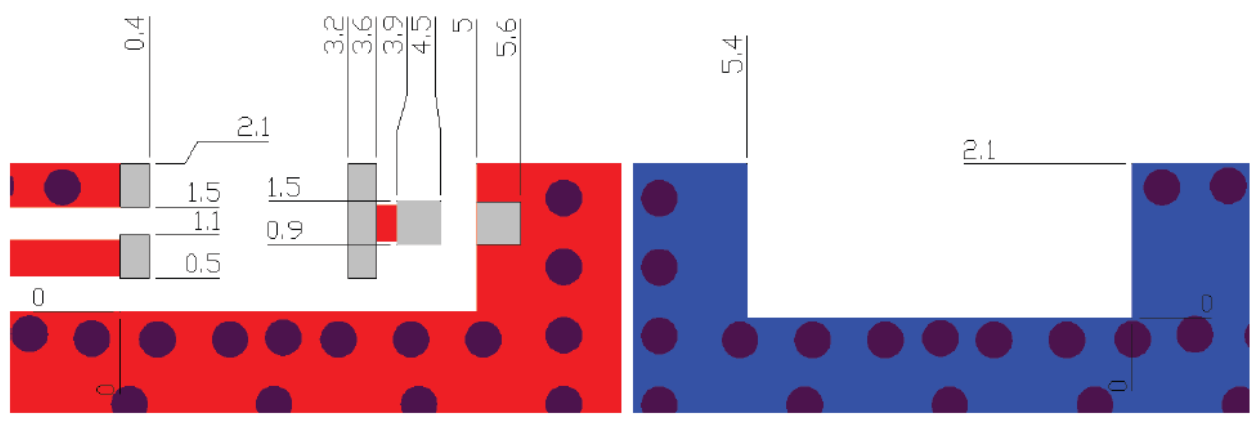


Unit : mm

## 9. Frequency tuning

Antenna tuning scenario:

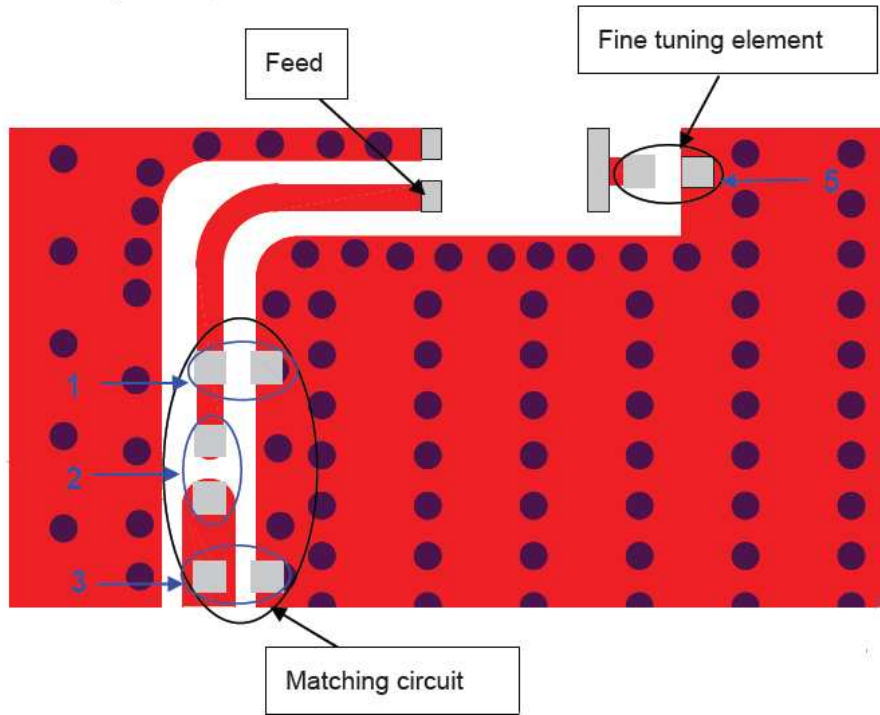

Matching circuit: (Center frequency is 5500MHz at 80x40mm ground plane)

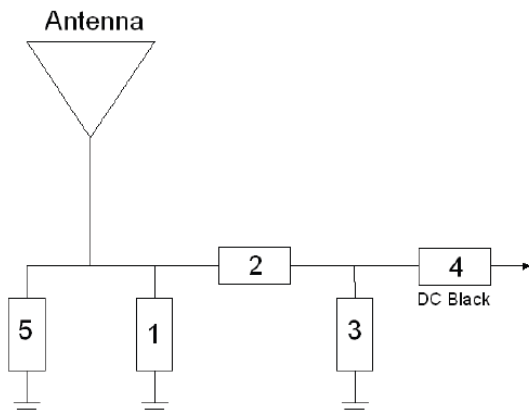


| System Matching Circuit Component |             |              |
|-----------------------------------|-------------|--------------|
| Location                          | Description | Vendor       |
| 1                                 | 0.2pF       | DARFON(0402) |
| 2                                 | 0Ω          | (0402)       |
| 3                                 | 1.5nH       | DARFON(0402) |
| 4                                 | 22pF        | DARFON(0402) |
| 5<br>(Fine tuning element)        | 0.2pF       | DARFON(0402) |



## 10. Soldering Conditions


Typical Soldering profile for lead-free process:

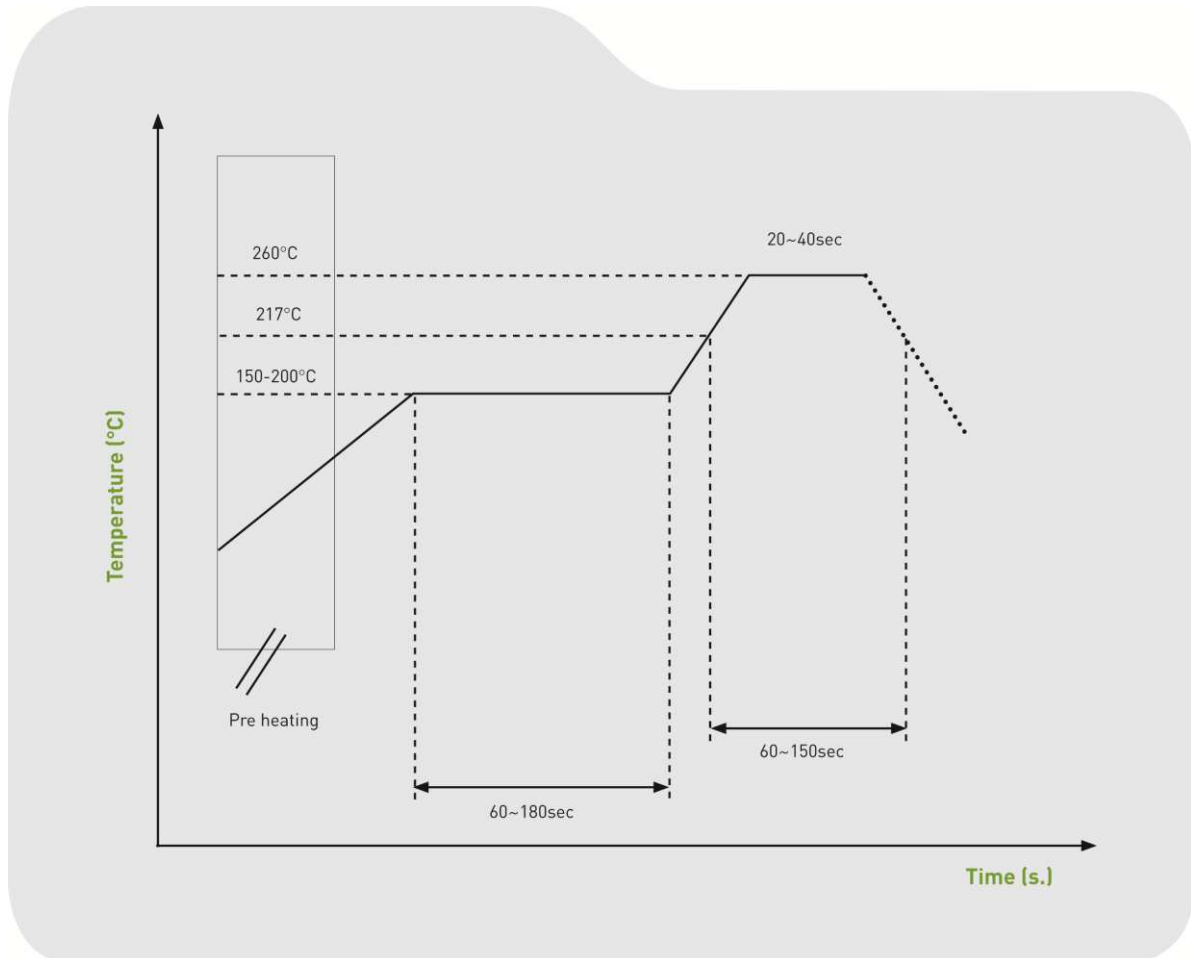

# 11. Packing

Quantity: 6000pcs/ Reel

Plastic tape:

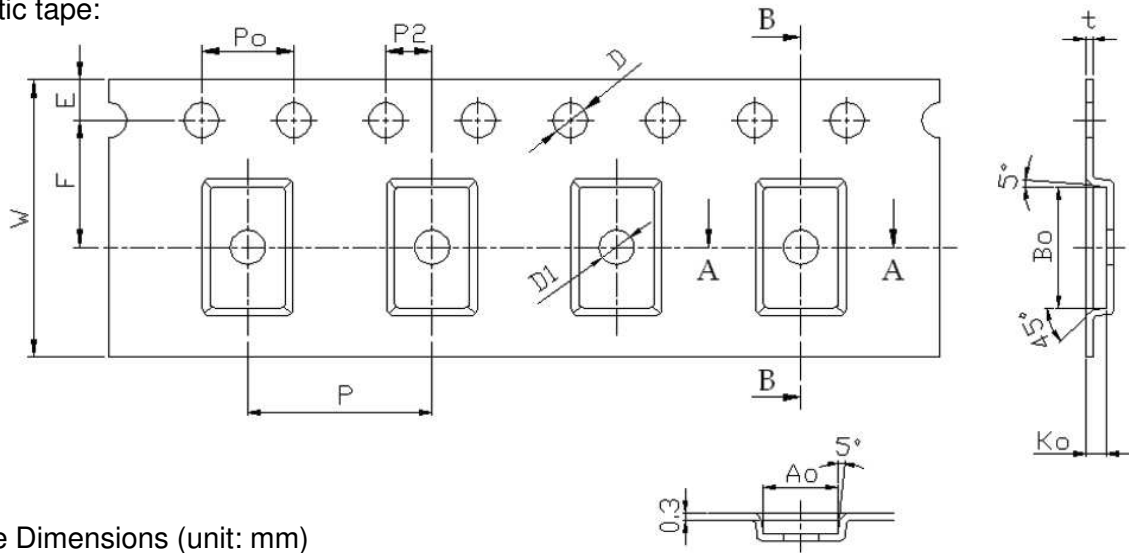

Tape Dimensions (unit: mm)

| Feature          | Specification | Tolerance     |
|------------------|---------------|---------------|
| W                | 12.00         | ±0.30         |
| P                | 8.00          | ±0.10         |
| E                | 1.75          | ±0.10         |
| F                | 5.50          | ±0.10         |
| P <sub>2</sub>   | 2.00          | ±0.10         |
| D                | 1.50          | +0.10 / -0.00 |
| D <sub>1</sub>   | -             | ±0.10         |
| P <sub>0</sub>   | 4.00          | ±0.10         |
| 10P <sub>0</sub> | 40.00         | ±0.20         |

Pocket Dimensions (unit: mm)

| Feature        | Specification | Tolerance |
|----------------|---------------|-----------|
| A <sub>0</sub> | 1.90          | +0.20     |
| B <sub>0</sub> | 3.50          | -0.10     |
| K <sub>0</sub> | 0.60          | ±0.05     |
| t              | 0.30          | ±0.05     |

1. Cumulative tolerance of 10 pocket hole pitch: ±0.20mm
2. Carrier camber not to exceed 1mm in 250mm
3. A<sub>0</sub> and B<sub>0</sub> measured on a plane above the inside bottom of the pocket
4. K<sub>0</sub> measured from a plane on the inside bottom of the pocket to the top surface of the carrier
5. All dimensions meet EIA-481-B requirements
6. Material – Clear non Anti-Static Polystyrene, Black Conductive Polystyrene