

# **Specification**

Spec No. : **FXP245** 

Part No. : **FXP245.07.0100A** 

Model : 450MHz ISM Band Flex Circuit Antenna

Features : 75\*45\*0.1mm

100mm Ø1.13 Cable

**RoHS** ✓



VERSION	DATE	PAGE	DESCRIPTION	CENTRE	APPROVED
А	09/21/2009	All	Antenna Specifications	Taiwan	Ruben F. Cuadras



## I. OVERVIEW

The Taoglas FXP245 450 MHz ISM Antenna covers from 450-457 MHz used in the 450 MHz ISM (Industrial Scientific Medical) Band. The antenna has been designed in a flexible material with a square form-factor and cable connection for an easy installation. The antenna works on different plastic materials and thickness. We have selected a piece of ABS with 2 mm of thickness as a baseline for testing.

### II. ANTENNA CHARACTERISTICS

Parameter	Specification		
Frequency Range	450MHz to 457MHz		
Return Loss (dB)	-20		
Gain (dBi)	0		
Impedance	50 Ω		
VSWR	≤2:1		
Polarization	Linear		
Power Handled	5W		
Operation Temperature	-40℃ ~ +85℃		
Storage Temperature	-40℃ ~ +85℃		
Dimensions	75*45*0.1mm		
Weight	1.5g		
Connector	MHFII (U.FL Compatible)		
Cable Standard	Mini-Coax 1.13 mm		
Cable Length and color	100mm, Black		
RoHS Compliant	Yes		
Adhesive	3M 467		



# III. TEST SET UP

# Rhode & Schwartz ZVL6 Vector Network Analyzer

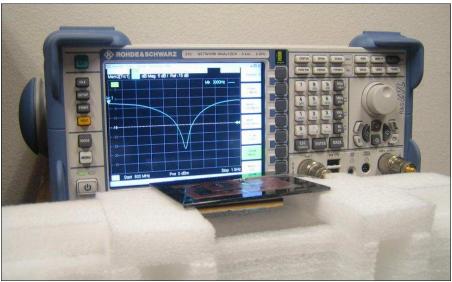


Figure 1. Network Analyzer.



#### IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, VSWR and smith chart were measured in the Agilent Rhode & Schwartz ZVL6 Vector Network Analyzer.

## A. Return Loss Data

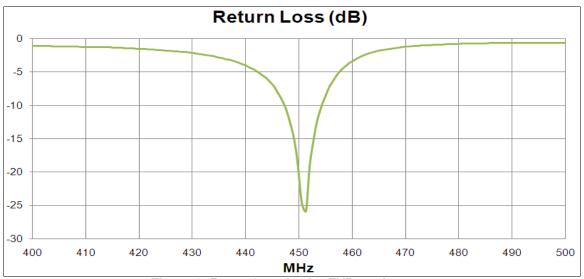


Figure 2. Return Loss for the FXP245 Antenna.

#### **B. VSWR Data**

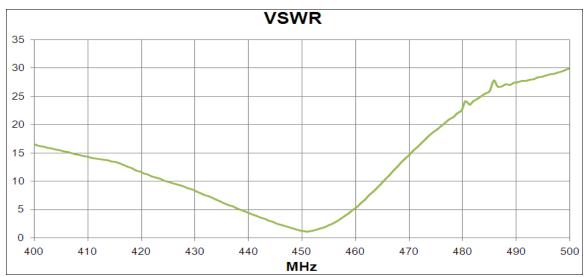


Figure 3. VSWR for the FXP245 Antenna.



## C. Smith Chart Data

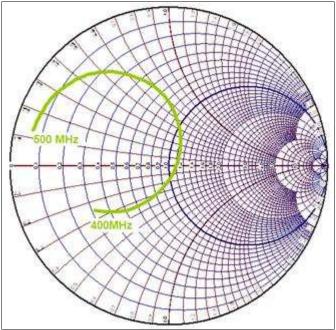


Figure 4. Smith Chart for the FXP245 Antenna.

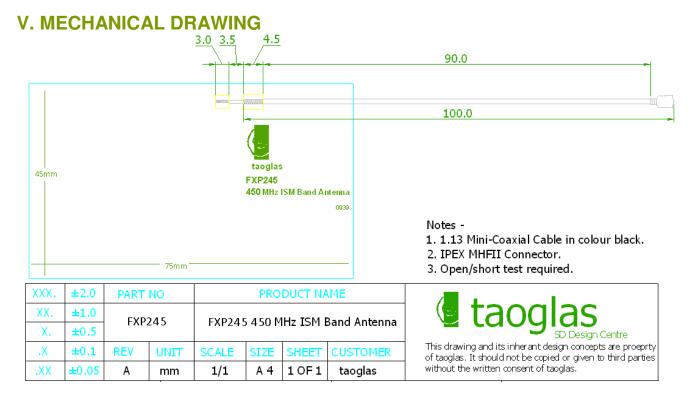


Figure 5. Mechanical Drawing for the FXP245 Antenna.