

# **SPECIFICATION**

Part No. : **PC23.07.0100A** 

Product Name: Internal Circular PCB Antenna

AMPS/GSM/PCS/DCS Cellular PCB Antenna

100mm 1.13 IPEX MHFI (U.FL comp)

Features : Diameter 42mm\*Height 1.6mm

Photo:





#### 1. Introduction

The PC23 Internal PCB Antenna is a circular Quad-band GSM antenna for incorporation antennas and transceiver modules worldwide. Omni-directional high gain across all bands ensures constant reception and transmission.. Cables and connectors are fully customizable.


### 2. Typical Antenna Performance in free space

Specifications  ELECTRICAL				
Band	824-896	880-960	1850-1990	1710-1880
Return Loss	-12 dB	-25 dB	-12 dB	-10 dB
Gain	Average 0 dBi			
Polarization	Linear			
Impedance	50 ohms			
Input Power	10 watts			
Input Connection	Coaxial Cable - RG174 Standard, Fully customizable			
VSWR (Min performance)	<2.0:1			

\*note: specifications may be subject to change




## 3. Outline Drawing

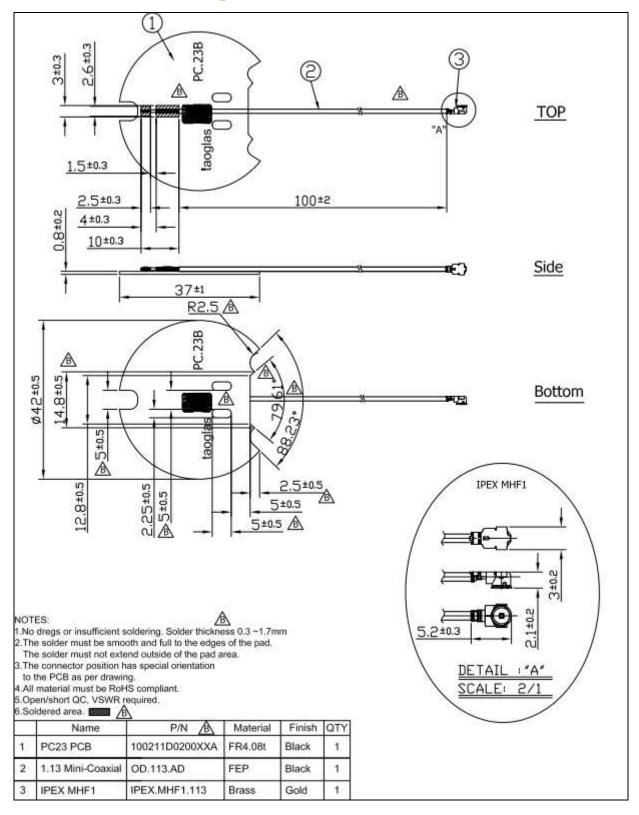




### 4. S11 Magnitude

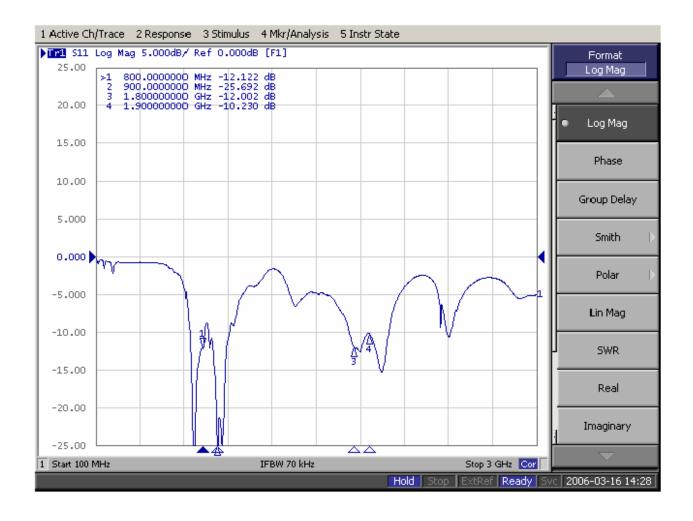



### 5. Radiation Patterns


### 800 MHz - 3D Radiation Pattern

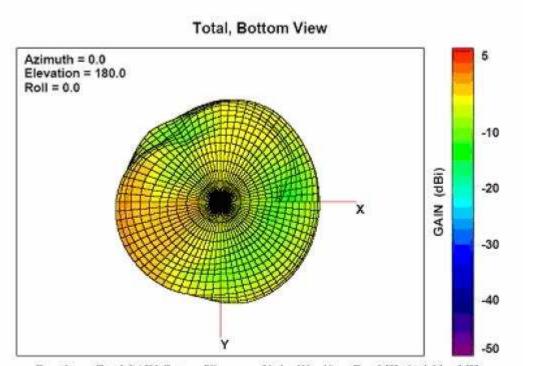

Free-Space Total GAIN, Bottom View, -- paNodes [2] -dStartFreqMHz %-0.1f>- MHz




### 900 MHz - 3D Radiation Pattern

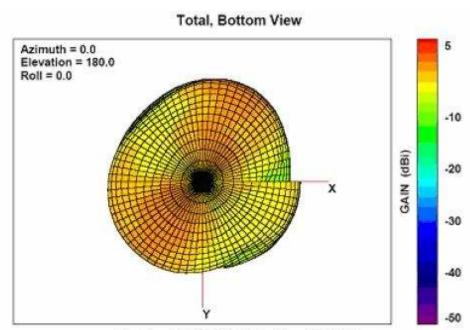

Free-Space Total GAIN, Bottom View, 900.0 MHz


#### 1800 MHz - 3D Radiation Pattern

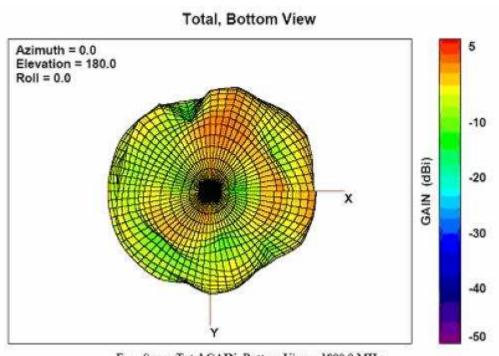

Free-Space Total GAIN, Bottom View, 1800.0 MHz



# 1900 MHz - 3D Radiation Pattern

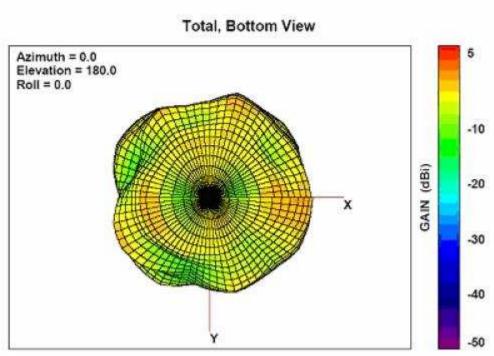

Free-Space Total GAIN, Bottom View, 1900.0 MHz