

INSULTHERM™ TRU-FIT

- UL Recognized: VW-1
- Rated To 464°F
- For High Temp - Low Voltage Applications
- Easy To Install-Cuts With Scissors
- Resists Most Organic Solvents
- Cut And Abrasion Resistant



Cut Cleanly
Scissors

Material	Acrylic Coated Fiberglass
Grade	FGL
Wall Thickness	Refer to Chart
Drawing Number	TF001INS-WD

 **TECHFLEX**
 Braided Sleeving Products
www.techflex.com
 800.323.5140 • 973.300.9242 • fax: 973.300.9409
 29 Brookfield Dr • Sparta, NJ 07871

Nominal Size	Diameter	Part #	Wall Thickness	Expansion Range		Bulk Spool	Shop Spool	Available Colors
				Min.	Max.			
24	0.022"	FGLG.24	0.006"	0.020"	0.027"	500'	250'	2
22	0.027"	FGLG.22	0.006"	0.025"	0.032"	500'	250'	2
20	0.034"	FGLG.20	0.006"	0.032"	0.039"	500'	250'	2
18	0.042"	FGLG.18	0.006"	0.040"	0.049"	500'	250'	2
16	0.053"	FGLG.16	0.006"	0.051"	0.061"	500'	250'	2
14	0.066"	FGLG.14	0.006"	0.064"	0.072"	500'	250'	2
12	0.085"	FGLG.12	0.006"	0.081"	0.089"	250'	100'	2
11	0.095"	FGLG.11	0.008"	0.091"	0.101"	250'	100'	2
10	0.106"	FGLG.10	0.008"	0.102"	0.112"	250'	100'	2
9	0.118"	FGLG.09	0.008"	0.114"	0.124"	250'	100'	2
8	0.133"	FGLG.08	0.008"	0.129"	0.141"	250'	100'	2
7	0.148"	FGLG.07	0.008"	0.144"	0.158"	250'	100'	2
6	0.166"	FGLG.06	0.010"	0.162"	0.178"	250'	100'	2
5	0.186"	FGLG.05	0.010"	0.182"	0.198"	250'	100'	2
4	0.208"	FGLG.04	0.010"	0.204"	0.224"	250'	100'	2
3	0.234"	FGLG.03	0.010"	0.229"	0.249"	250'	100'	2
2	0.263"	FGLG.02	0.010"	0.258"	0.278"	250'	100'	2
1	0.294"	FGLG.01	0.010"	0.289"	0.311"	100'	50'	2
0	0.330"	FGLG.00	0.010"	0.325"	0.347"	100'	50'	2
3/8"	0.375"	FGL0.38	0.010"	0.375"	0.399"	100'	50'	2
7/16"	0.438"	FGL0.44	0.010"	0.438"	0.462"	100'	50'	2
1/2"	0.500"	FGL0.50	0.010"	0.500"	0.524"	100'	50'	2
5/8"	0.625"	FGL0.63	0.010"	0.625"	0.655"	100'	50'	2
3/4"	0.750"	FGL0.75	0.010"	0.750"	0.786"	100'	50'	2


Heat Treated, Fray-Resistant Fiberglass Sleeving

Techflex INSULTHERM TRU-FIT (FGL) is a braided fiberglass sleeving which has been heat treated and impregnated with an acrylic binder to reduce fraying and dusting, and improve usability and performance. FGL is engineered for applications where temperatures as high as 1,200°F may be encountered. FGL is used as primary insulation on low voltage applications such as leads in toasters, coffee makers, ranges and other appliances. FGL may also be used as insulation and protection for small heaters and resistors that operate at high temperatures, and to insulate over soldered connections when exposure to solder melt temperatures is possible.

Insultherm Tru-Fit provides a sturdy, long lasting and inexpensive insulation solution. It is flexible and expandable, and can easily be installed over applications with irregular shapes and tight turns. Standard color are Black and Natural, but other colors are available by special order. Contact your Account Representative for details.

Colors Available:

 Black (BK) and Silver (SV).

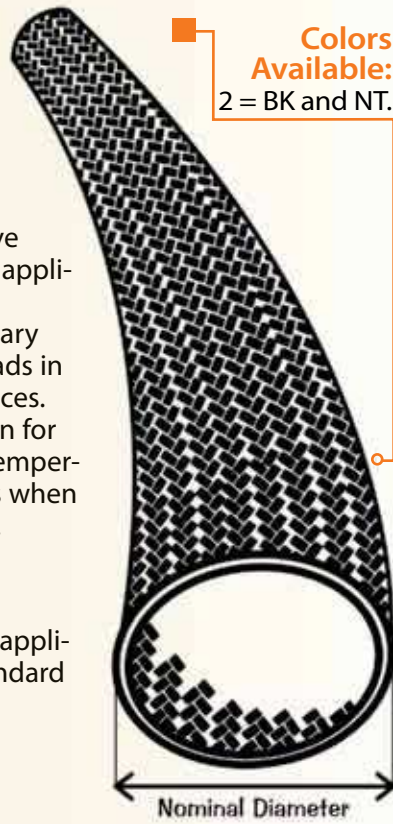

Colors Available:
 2 = BK and NT.



INSULTHERM™ TRU-FIT



Abrasion Resistance
Medium

Abrasion Test Machine
Taber 5150

Abrasion Test Wheel
Calibrase H-18

Abrasion Test Load
500g



Rating _____ UL VW-1



Chemical Resistance

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

- Aromatic Solvents _____ 1
- Aliphatic Solvents _____ 1
- Chlorinated Solvents _____ 1
- Weak Bases _____ 1
- Salts _____ 1
- Strong Bases _____ 1
- Salt Water 0-S-1926 _____ 1
- Hydraulic Fluid MIL-H-5606 _____ 1
- Lube Oil MIL-L-7808 _____ 1
- De-Icing Fluid MIL-A-8243 _____ 1
- Strong Acids _____ 2
- Strong Oxidants _____ 2
- Esters/Keytones _____ 1
- UV Light _____ 2
- Petroleum _____ 1
- Fungus ASTM G-21 _____ 1
- Halogen Free _____ Yes
- RoHS _____ Yes
- SVHC _____ None

Melt Point
ASTM D-2117
2,048°F (1,120°C)

Maximum Continuous
Mil-I-23053
1,202°F (650°C)

Minimum Continuous
-94°F (-70°C)



PHYSICAL PROPERTIES

- Monofilament Diameter _____ NA
ASTM D-204
- Flammability Rating _____ VW-1
FMVSS-302 Approved
- Recommended Cutting _____ Scissor
- Colors _____ 2
- Wall Thickness _____ .006-.016
- Specific Gravity ASTM D-792__ 1.0-1.8
- Moisture Absorption _____ .01
% ASTM D-570
- Hard Vacuum Data ASTM E-595
- TML _____ .02
- CVCM _____ .01
- WVR _____ .00
- Outgassing _____ Low

www.techflex.com