
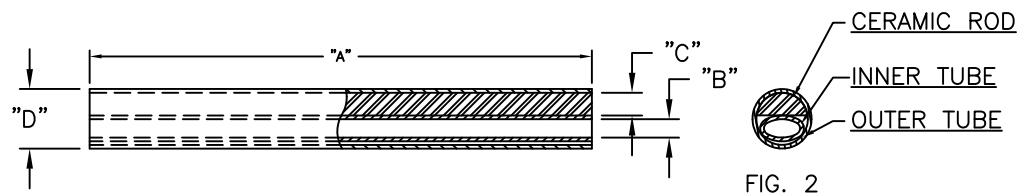


PART NO.	NOMINAL SLEEVE LENGTH "A" REF.	INNER TUBE DIAMETER MIN. "B"	NOMINAL ROD DIAMETER "C"	RECOVERED DIAMETER "D" REF.	FIGURE NO.
*OFSP-10-23	.91 (23.0)	.06 (1.5)	.04 (1.0)	.098 (2.5)	1
*OFSP-10-25	.98 (25.0)				
*OFSP-10-30	1.18 (30.0)				
*OFSP-10-35	1.38 (35.0)				
*OFSP-10-40	1.57 (40.0)				
*OFSP-10-45	1.77 (45.0)				
*OFSP-10-61	2.40 (61.0)	.06 (1.5)	.06 (1.5)	.11 (2.8)	
*OFSP-15-40	1.57 (40.0)				
*OFSP-15-61	2.40 (61.0)	.02 (0.5)	.03 (0.8)	.06 (1.6)	
OFSP-08-25	.98 (25.0)				
OFSP-08-40	1.57 (40.0)	.14 X .04 (3.6 X 1.0)	.16 X .07 (4.0 X 1.8)	.20 X .12 (5.0 X 3.0)	2
**ROFSP-40-40	1.57 (40.0)				

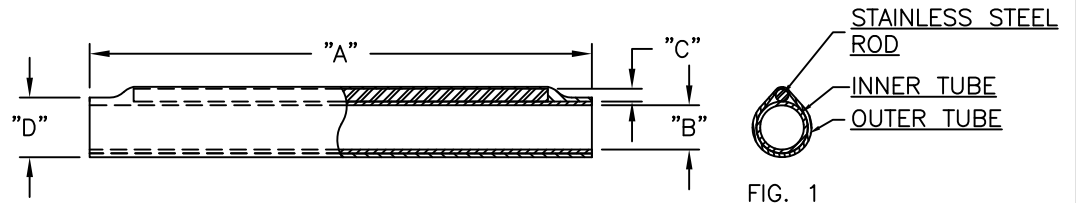

- NOTE:
- MATERIAL:**
 OUTER TUBE: HEATSHRINK 3:1 RATIO CROSS-LINKED MODIFIED POLYOLEFIN (RMS-225).
 INNER TUBE: MODIFIED PE COPOLYMER ADHESIVE (RMS-226).
 ROD: STAINLESS SPRING STEEL (RMS-227).
 COLOR: CLEAR.
 - *BLACK (BLK), BROWN (BRN), GREEN (GRN), BLUE (BLU), LIGHT BLUE (LBL), YELLOW (YEL), RED (RED), PINK (PNK), ORANGE (ORG), VIOLET (VIO), GRAY (GRY) AND WHITE (WHT), AVAILABLE BY SPECIAL ORDER ONLY.
 TO ORDER, ADD COLOR SUFFIX TO PART NO.
 - **MATERIAL:
 OUTER TUBE: HEATSHRINK 3:1 RATIO CROSS-LINKED MODIFIED POLYOLEFIN (RMS-225).
 INNER TUBE: MODIFIED PE COPOLYMER ADHESIVE (RMS-226).
 ROD: CERAMIC (RMS-170).
 COLOR: CLEAR.

TITLE: OPTICAL FIBER SPLICE PROTECTOR				DWG IN IN (MM)		FINAL				
E	SEE CO 200469 FOR CHANGES	SK 11.20.09	TOLERANCES UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC=±1/64 ANG=±1°	FILE #	OFSP	DWN:	S.M.	APP:	PART # SEE TABLE	PRINT TYPE CA
D	SEE ECN #1319 FOR CHANGES	SK 04.19.07		MAT'L:	SEE NOTES	DT:	05/02/02	DT:		
C	FILE NO. WAS (R)OFSP	SM 05.14.02		RE:	RICHCO, INC.	RICHCO INC. PO BOX 804238, CHICAGO, 60680 (773) 539-4060				
B	CORRECTED PART NOS. FROM "-12" TO "-10"	SM 05.09.02								
A	COMPLETELY REDRAWN AND ADDED NEW PART NO.'S	SM 05.02.02								
REV	DESCRIPTION	ENGR DATE								