


REPLACEMENT CASTER WHEELS

CASBRWHL/CASERWHL/CASPPWH/
CASPUWH/CASNYWH



Nylon
Medium Duty

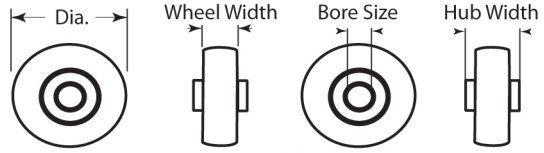

Nylon
Heavy Duty




Polyurethane
Medium Duty



Polyurethane
Heavy Duty



Black Rubber



Elastic Rubber



Plastic

| Part No. | Material | Approx. Load Capacity Lbs. | Duty | Nominal Ø | Wheel Width | Bore Size | Hub Width | Wheel Bearing | Standard Pack |
|-------------|----------------|----------------------------|--------|-------------|-------------|----------------------|--------------|-------------------------------|---------------|
| CASBRWHL3A | Black Rubber | 88 | Light | 3.0 (76.2) | .90 (22.9) | .472 (12) | 1.181 (30) | Roller Bearing | 180 |
| CASBRWHL4A | | 132 | Light | 4.0 (101.6) | 1.06(26.9) | .472 (12) | 1.574 (40) | | 80 |
| CASBRWHM5A | | 220 | Medium | 5.0 (127) | 1.33 (33.8) | .590 (15) | 1.574 (40) | | 48 |
| CASERWHL3A | Elastic Rubber | 88 | Light | 3.0 (76.2) | 1.29 (32.8) | .472 (12) | 1.490 (37.8) | Roller Bearing | 150 |
| CASERWHL4A | | 132 | Light | 4.0 (101.6) | 1.29 (32.8) | .472 (12) | 1.490 (37.8) | | 70 |
| CASERWHM5A | | 220 | Medium | 5.0 (127) | 1.33 (33.8) | .472 (12) | 1.490 (37.8) | | 50 |
| CASPPWHM2A | Plastic | 154 | Medium | 2.0 (50.8) | .90 (22.9) | .236 (6) | .984 (25) | Plain | 250 |
| CASPPWHM25A | | 165 | Medium | 2.5 (63.5) | .86 (63.5) | .393 (10) | 1.250 (31.8) | | 200 |
| CASPUWHM3A | Polyurethane | 176 | Medium | 3.0 (76.2) | 1.25 (31.8) | .322/.401 (8.2/10.2) | 1.570 (39.9) | Precision Ball Bearing | 150 |
| CASPUWHM4A | | 264 | Medium | 4.0 (101.6) | 1.25 (31.8) | .322/.401 (8.2/10.2) | 1.570 (39.9) | | 70 |
| CASPUWHM5A | | 330 | Medium | 5.0 (127) | 1.25 (31.8) | .322/.401 (8.2/10.2) | 1.570 (39.9) | | 50 |
| CASPUWHH4A | | 308 | Heavy | 4.0 (101.6) | 1.96 (49.8) | .748 (19) | 2.360 (60) | Steel Roller Bearing | 40 |
| CASPUWHH5A | | 440 | Heavy | 5.0 (127) | 1.96 (49.8) | .748 (19) | 2.360 (60) | | 30 |
| CASPUWHH6A | | 485 | Heavy | 6.0 (152.4) | 1.96 (49.8) | .748 (19) | 2.360 (60) | | 16 |
| CASNYWHM3A | Nylon | 176 | Medium | 3.0 (76.2) | .98 (24.9) | .319 (8.1) | 1.220 (31) | Plain | 180 |
| CASNYWHM4A | | 220 | Medium | 4.0 (101.6) | 1.06 (26.9) | .314 (8) | 1.220 (31) | | 70 |
| CASNYWHH4A | | 661 | Heavy | 4.0 (101.6) | 1.96 (49.8) | .787 (20) | 2.160 (54.9) | Precision Double Ball Bearing | 40 |
| CASNYWHH5A | | 881 | Heavy | 5.0 (127) | 1.96 (49.8) | .787 (20) | 2.160 (54.9) | | 30 |
| CASNYWHH5A | | 1102 | Heavy | 6.0 (152.4) | 1.96 (49.8) | .787 (20) | 2.160 (54.9) | | 16 |