



PART NO.	"A" DIA.	"B" DIA.	"C"	THREAD TYPE	PANEL THICKNESS
SEI-1	.39 [9.9]	.21 [5.3]	.30 [7.6]	#6-32 UNC	.050095 [1.27-2.41]
SEI-2				M4	.050091 [1.27-2.3]
SEI-3				М3	.030091[1.21-2.3]
SEI-4	.43 [10.9]	.25 [6.3]	.34 [8.6]	M5	.050095 [1.27-2.41]
SEI-5	.43 [10.8]			M6	.030093 [1.27-2.41]

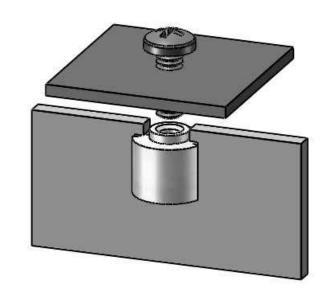

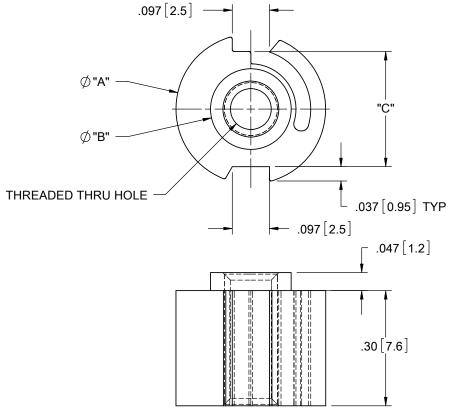

MOUNTING HOLE DETAIL FOR SEI-1, -2, -3 MOUNTING HOLE DETAIL FOR SEI-4 AND SEI-5 .218±.003 [5.5±0.08] — $.256 \pm .003$.063 [1.6] .063 [1.6] [6.5±0.08] .312±.003 $.312 \pm .003$ $[7.9 \pm 0.08]$ $[7.9 \pm 0.08]$ $.312 \pm .003$ $.350 \pm .003$ $[7.9 \pm 0.08]$ $[8.9 \pm 0.08]$

- NOTES:

 1. MATERIAL: NYLON UL 94 V-2 (RMS-01).

 NYLON 6/6 UV STABILIZED (RMS-46), AVAILABLE BY SPECIAL ORDER.
 TO ORDER ADD SUFFIX "-UVB" AT THE END OF PART NO.

 -NYLON 6/6 UL94 V-2 (RMS-109), AVAILABLE BY SPECIAL ORDER.
 TO ORDER ADD SUFFIX "-HT" AT THE END OF PART NO.

 2. COLOR: BLACK.
- 3. TOOL REQUIRED FOR SCREW INSTALLATIO

NC	D	SEE CO 200550 FOR CHANGES	SK	07/01/10
	С	SEE CO 200456 FOR CHANGES	SK	10/22/09
	В	SEE CO 200402 FOR CHANGES	SK	07/30/09
	Α	RELEASED FOR PRODUCTION	SK	09/14/07
	REV.	DESCRIPTION	ENGR.	DATE

_							
	TITLE:	SHEET EDGE INSERTS					
┰	CREATED USING SOLIDWORKS	FILE #: SEI-X		DWN: SK	APP: S.K.	FINAL	
0	TOLERANCES	SHEET: 1 OF 1	SHEET SIZE: B	DT: 09/12/07	CHKD: S.J.	PART #	PRINT
9 7	UNLESS NOTED .XX=±.010 .XXX=±.005 FRAC.=±1/64 ANG.=±1°	RE: RICHCO, INC.		RICHCO, INC. ENG@RICHCO-INC.COM (773) 539-4060		SEE TABLE	CA