


SWIVEL BRAKE CASTERS

CASBRSWB,CASERSWB,CASPPSWB,
CASPU5WB,CASNYSWB



- Caster is totally immobile when the brake is applied
- Brake applied with an easy step on the locking pad
- Light & Medium duty housing: Zinc-Plated Steel
- Heavy duty housing: Solid Steel welded construction

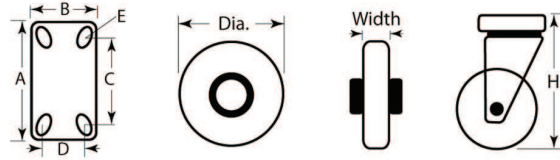

Nylon
Medium Duty



Nylon
Heavy Duty



Polyurethane
Medium Duty



Polyurethane
Heavy Duty



Black Rubber



Elastic Rubber



Plastic Low Profile

Standard Pack: 4 per bag

Part No.	Material	Approx. Load Capacity Lbs.	Duty	Nominal Ø	Wheel Width	"H" Overall Height	"A"	"B"	"C"	"D"	"E" Bolt Hole	Wheel Bearing
CASBR5WB05A	Black Rubber	88	Light	3.0 (76.2)	.90 (22.9)	3.81 (96.8)	3.30 (83.8)	2.83 (71.9)	2.44 (62)	1.96 (49.8)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASBR5WB10A		132	Light	4.0 (101.6)	1.06(26.9)	5.11 (129.8)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASBR5WB15A		220	Medium	5.0 (127)	1.33 (33.8)	6.10 (154.9)	4.01 (101.9)	3.30 (83.8)	3.14 (79.8)	2.36 (59.9)	.55 X .35 (13.8 X 8.9)	
CASERSWB05A	Elastic Rubber	88	Light	3.0 (76.2)	1.29 (32.8)	4.09 (32.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Roller Bearing
CASERSWB10A		132	Light	4.0 (101.6)	1.29 (32.8)	5.19 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASERSWB15A		220	Medium	5.0 (127)	1.33 (33.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPP5WB05A	Plastic Low Profile	154	Medium	2.0 (50.8)	.90 (22.9)	2.48 (63)	2.63 (66.8)	1.88 (47.8)	2.12 (53.8)	.94 (23.9)	Ø.24 (6.1)	Plain
CASPP5WB10A		165	Medium	2.5 (63.5)	.86 (63.5)	3.30 (21.8)	3.74 (95)	2.75 (69.9)	2.99 (75.9)	1.75 (75.9)	Ø.35 (8.9)	
CASPU5WB05A	Polyurethane	176	Medium	3.0 (76.2)	1.25 (31.8)	4.09 (103.9)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	Precision Ball Bearing
CASPU5WB10A		264	Medium	4.0 (101.6)	1.25 (31.8)	5.19 (131.8)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPU5WB15A		330	Medium	5.0 (127)	1.25 (31.8)	6.22 (158)	3.74 (95)	2.63 (66.8)	2.87 (72.9)	1.77 (45)	.43 X .33 (10.9 X 8.4)	
CASPU5WB25A		308	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Steel Roller Bearing
CASPU5WB30A		440	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASPU5WB35A		485	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYSWB05A	Nylon	176	Medium	3.0 (76.2)	.98 (24.9)	3.70 (93.9)	2.75 (69.9)	2.28 (57.9)	2.16 (54.9)	1.65 (41.9)	Ø.33 (8.4)	Plain
CASNYSWB10A		220	Medium	4.0 (101.6)	1.06 (26.9)	4.76 (120.9)	3.93 (99.8)	2.28 (57.9)	3.22 (81.8)	1.57 (39.9)	Ø.33 (8.4)	
CASNYSWB25A		661	Heavy	4.0 (101.6)	1.96 (49.8)	5.59 (142)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	Precision Double Ball Bearing
CASNYSWB30A		881	Heavy	5.0 (127)	1.96 (49.8)	6.45 (163.8)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	
CASNYSWB35A		1102	Heavy	6.0 (152.4)	1.96 (49.8)	7.48 (190)	4.52 (114.8)	3.93 (99.8)	2.83 (71.9)	3.34 (84.8)	.74 X .39 (18.8 X 9.9)	