
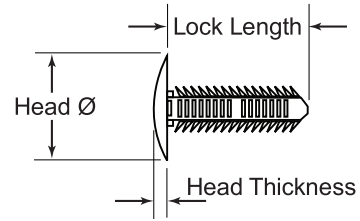


XT
Fir-Tree Rivet

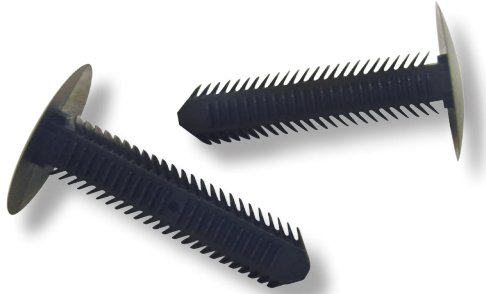

- The ribbed design ensures fast and easy installation while securely holding into various materials like wood, metal, foam, rubber and plastic
- When pushed into a hole, the flexible ribs deflect then spring back to lock securely in place

Material: UL94 V-2 Nylon 6/6 Color: Black Standard Pack: 1,000 per bag					
Part No	Hole Ø	Panel Thickness	Head Ø	Head Thickness	Lock Length
XT1250125A	.125 (3.2)	.062 - .125 (1.6 - 3.2)	.344 (8.7)	.062 (1.6)	.208 (5.3)
XT1250250A		.062 - .250 (1.6 - 6.4)			.321 (8.2)
XT1250375A		.062 - .375 (1.6 - 9.5)			.458 (11.6)
XT1880250A	.188 (4.8)	.062 - .250 (1.6 - 6.4)	.500 (12.7)	.078 (2)	.348 (8.8)
XT1880375A		.062 - .375 (1.6 - 9.5)			.723 (18.4)
XT1880500A		.062 - .500 (1.6 - 12.7)			.598 (15.2)
XT1880625A		.062 - .625 (1.6 - 15.9)			.723 (18.4)
XT1880750A		.062 - .750 (1.6 - 19.1)			.848 (21.5)
XT2500250A	.250 (6.4)	.062 - .250 (1.6 - 6.4)	.700 (17.8)	.1 (2.5)	.391 (9.9)
XT2500375A		.062 - .375 (1.6 - 9.5)			.506 (12.9)
XT2500500A		.062 - .500 (1.6 - 12.7)			.630 (16)
XT2500625A		.062 - .625 (1.6 - 15.9)			.755 (19.2)
XT2500750A		.062 - .750 (1.6 - 19.1)			.880 (22.4)
XT2500875A		.062 - .875 (1.6 - 22.2)			1.00 (25.5)
XT2501000A		.062 - 1.00 (1.6 - 25.4)			1.12 (28.5)
XT2501250A		.062 - 1.25 (1.6 - 31.8)			1.38 (35.1)
XT2501500A		.062 - 1.25 (1.6 - 38.1)			1.63 (41.5)
XT2501750A		.062 - 1.75 (1.6 - 44.5)			1.88 (47.8)
XT2502000A		.062 - 2.00 (1.6 - 50.8)			2.13 (54.2)
XT2810250A	.281 (7.1)	.062 - .250 (1.6 - 6.4)	.787 (20)	.1 (2.5)	.384 (9.8)
XT2810375A		.062 - .375 (1.6 - 9.5)			.515 (13.1)
XT2810500A		.062 - .500 (1.6 - 12.7)			.642 (16.3)
XT2810625A		.062 - .625 (1.6 - 15.9)			.767 (19.5)
XT2810750A		.062 - .750 (1.6 - 19.1)			.894 (22.7)
XT2810875A		.062 - .875 (1.6 - 22.2)			1.02 (25.9)
XT2811000A		.062 - 1.00 (1.6 - 25.4)			1.15 (29.1)
XT2811250A		.062 - 1.25 (1.6 - 31.8)			1.40 (35.6)
XT2811500A		.062 - 1.25 (1.6 - 38.1)			1.65 (41.9)
XT2811750A	.062 - 1.75 (1.6 - 44.5)	1.90 (48.3)			
XT3120250A	.312 (7.9)	.062 - .250 (1.6 - 6.4)	.874 (22.2)	.1 (2.5)	.410 (10.4)
XT3120375A		.062 - .375 (1.6 - 9.5)			.529 (13.4)
XT3120625A		.062 - .625 (1.6 - 15.9)			.783 (19.9)
XT3120750A		.062 - .750 (1.6 - 19.1)			.894 (22.7)
XT3120875A		.062 - .875 (1.6 - 22.2)			1.04 (26.3)
XT3121000A		.062 - 1.00 (1.6 - 25.4)			1.16 (29.5)
XT3121250A		.062 - 1.25 (1.6 - 31.8)			1.42 (36)
XT3121500A	.062 - 1.25 (1.6 - 38.1)	1.67 (42.4)			
XT3750250A	.375 (9.5)	.062 - .250 (1.6 - 6.4)	1.00 (22.4)	.1 (2.5)	.445 (11.3)
XT3750500A		.062 - .500 (1.6 - 12.7)			.689 (17.5)
XT3750625A		.062 - .625 (1.6 - 15.9)			.816 (20.7)
XT3750750A		.062 - .750 (1.6 - 19.1)			.943 (24)
XT3751250A		.062 - 1.25 (1.6 - 31.8)			1.45 (36)
XT3751500A		.062 - 1.25 (1.6 - 38.1)			1.71 (43.3)
XT3751750A		.062 - 1.75 (1.6 - 44.5)			1.96 (49.8)